


RoHS

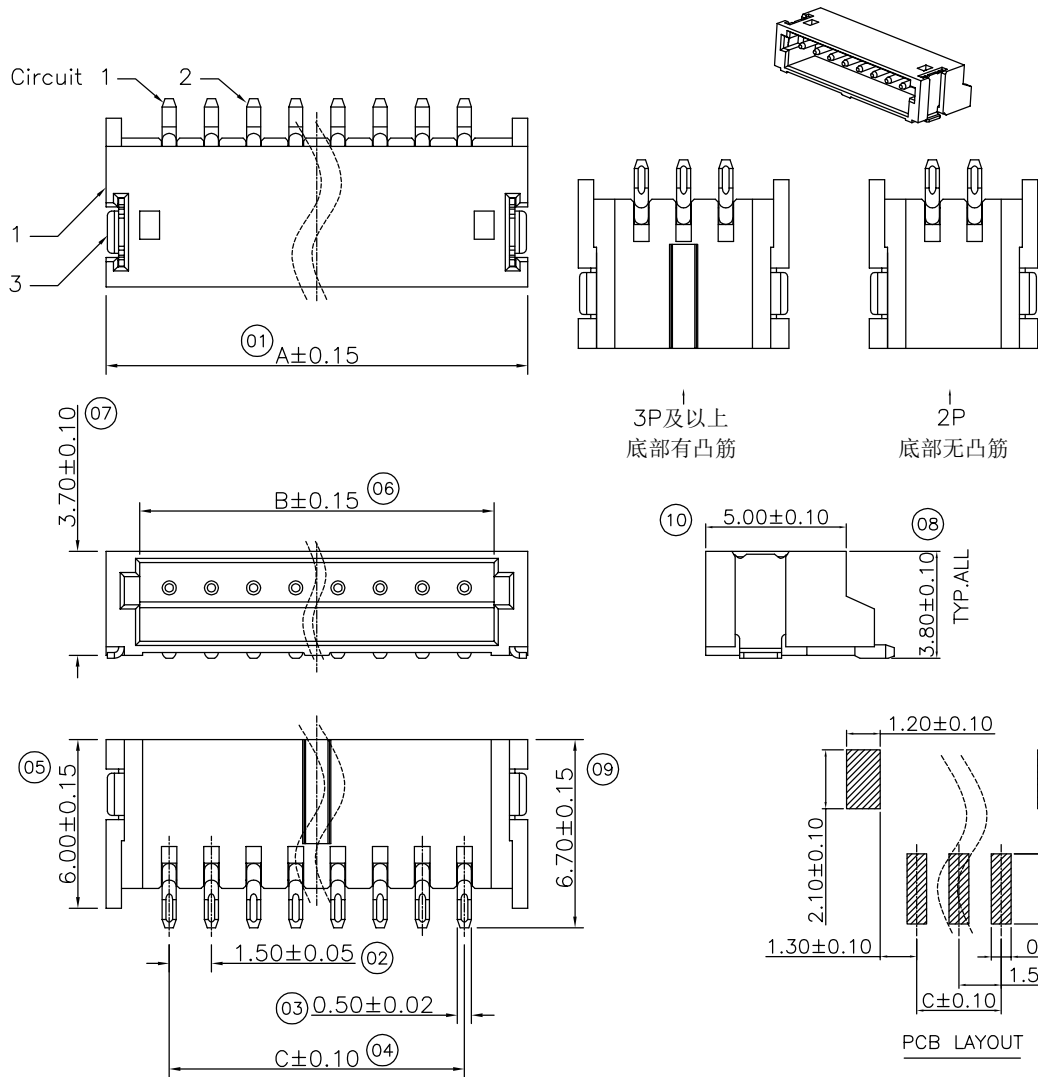

NO.	COMPONENTS	MATERIALS	SPECIFICATION:FINISH/COLOR	QTY.
1	INSULATOR	LCP (UL94V-0)	Natural	1
2	CONTACTS	COPPER ALLOY	Tin-Plated	N
3	SOLDER TAP	COPPER ALLOY	Tin-Plated	2

NOTE(UNLESS OTHERWISE SPECIFIED):
 1. ALL MATERIAL MUST BE COMPLY WITH ROHS.
 2. PRODUCT PERFORMANCE:
 2.1 RATED VOLTAGE(MAX.):50V AC/DC
 2.2. RATED CURRENT(MAX.):1.0A AC/DC
 2.3 DIELECTRIC STRENGTH:500V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
 2.4 INSULATION RESISTANCE:500 MΩ MIN. 500VDC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
 2.5 CONTACT RESISTANCE:20 mΩ MAX.
 2.6 OPERATING TEMPERATURE:-25°C to +85°C
 3.PART NO. LEGEND:

1WF05-115XXX-00001
 00001:Water code
 See the table below
 005: 5PIN

PIN	DIM A	DIM B	DIM C
2P	6.00	3.60	1.50
3P	7.50	5.10	3.00
4P	9.00	6.60	4.50
5P	10.50	8.10	6.00
6P	12.00	9.60	7.50
7P	13.50	11.10	9.00
8P	15.00	12.60	10.50
9P	16.50	14.10	12.00
10P	18.00	15.60	13.50
11P	19.50	17.10	15.00
12P	21.00	18.60	16.50
13P	22.50	20.10	18.00
14P	24.00	21.60	19.50
15P	25.50	23.10	21.00
16P	27.00	24.60	22.50

规格	新品号
2P	1WF05-115002-00001
3P	1WF05-115003-00001
4P	1WF05-115004-00001
5P	1WF05-115005-00001
6P	1WF05-115006-00001
7P	1WF05-115007-00001
8P	1WF05-115008-00001
10P	1WF05-115010-00001
12P	1WF05-115012-00001
13P	1WF05-115013-00001

5.0			
4.0			
3.0	22.04.02	Update the LOGO of the frame	ShunMingWen
2.0	21.10.27	Added 13PIN specifications	ShunMingWen
1.0	20.11.05	NEW	ShunMingWen
NO.	DATE	DESCRIPTION	DRAWING

DRAWING:	GENERAL TOLERANCE	
ShunMingWen	.X:=±0.30	.X*: =±2°
CHECKED:	.XX:=±0.20	.XX*: =±1°
Tian hai	.XXX:=±0.10	.XXX*: =±0.5°
APPROVAL:	UNIT: MM	PROJECTION:
Cykin	SCALE: 1/1	
	SHEET: 1/1	

CHIN-BAN
 Electronic Technology

DESCRIPTION:	1.5PITCH 90° WAFER SMT TYPE CONN	
PART NO:	1WF05-115XXX-0000X	REV: 3.0
DRAWING NO:	UK0446	SIZE: A4