


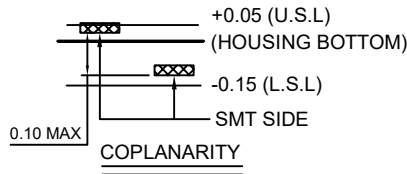



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



STEP 1 INSERT Micro-SIM CARD




STEP 2 PUSH THE SHELL



STEP 3 FINISH

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



NANO SIM CARD

NOTES:

- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 60 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - VOLTAGE RATING: 50V.
 - CURRENT RATING: 1.0A.
- MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -20°C~+85°C
 - DURABILITY: 5000 CYCLES
- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE, T=0.15
 - SHELL: STAINLESS STEEL, T=0.20
- FINISHED:
 - TERMINAL: Ni PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA, AU PLATED ON SOLDER TAIL

new		2015/5/3	A	瀚源	
ECN BO.		DESCRIPTION.	DATE.		REV.
DESIGNED	CHECKED	APPROVAL	DRAWING NUMBER	SCALT: 1/2	SCALE: 3:1
Mikey	Tom	Jerry	PART NAME	NANO-1150	UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.2! X.x ±0.2! X.xx ±0.15 ANGULAIR ±3
			MODEL NAME	NANO-1150	
			3RD ANGLE PROJ	HanElectricity Co.,LTD	