


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			The first edition released	2017.02.21	SQL
A1			统一变更料号	2018.09.26	Mark

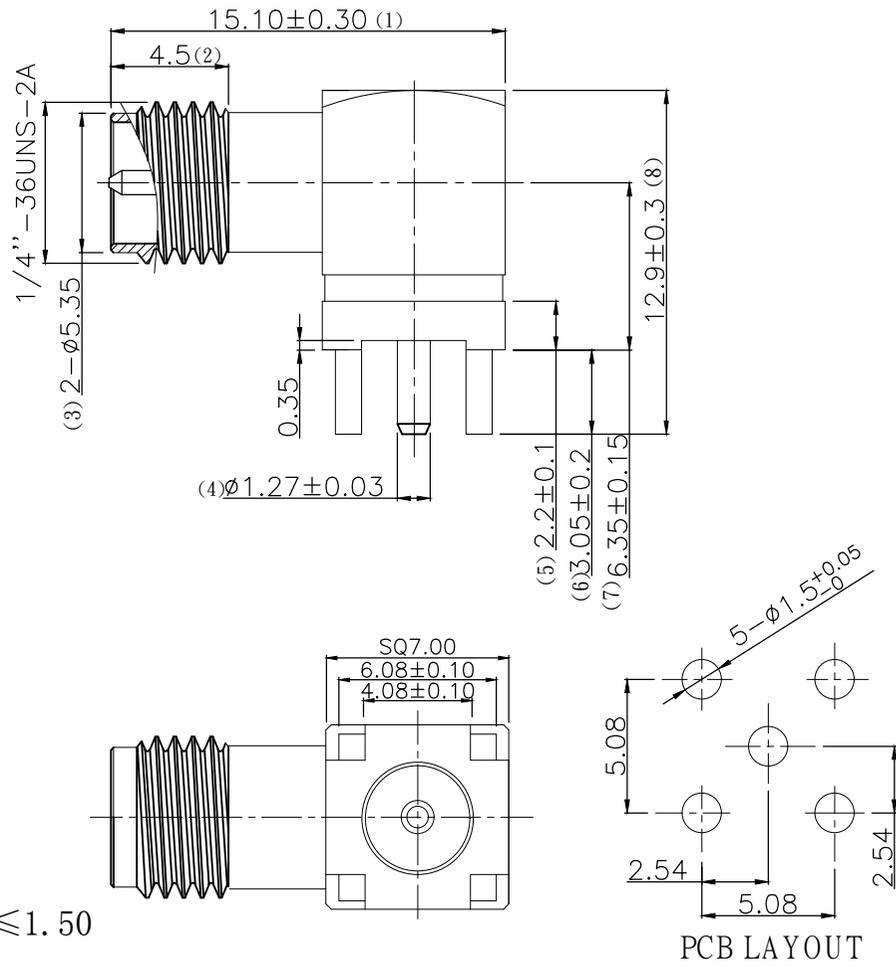

1. Electrical Characteristics
 - 1.1 Impedance: 50ohm
 - 1.2 Working Frequency: DC-6GHz VSWR: ≤1.50
 - 1.3 Working Voltage: 335V/max
 - 1.4 Insulation Resistance: 5000 Mohm
 - 1.5 Contact Resistance: Center Contact: 3 mohm
 - 1.6 Outer Contact: ≤ 2.0 mohm
2. Environmental
 - 2.1 Working Temperature Range: -55℃~+125℃

* NO USING RESTRICTED AND BANNED SUBSTANCE

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0°
X.X	±0.20	X.X°	±3.0°
X.XX	±0.10	X.XX°	±2.0°
X.XXX	±0.05	X.XXX°	±1.0°

HJ-Tech		东莞市皇捷通讯科技有限公司		
DRAW NO.		DATE	DRAW NAME: 90度SMA母头镀金 FOR PCB SQ7.0*L15.1*W12.9mm, OD1.27公针镀金,脚长3.05mm	
DESIGN:	SQL	2017.02.21	FILE:	P/N NO. 2LC15SM027
CHECK:			MODEL:	
APPROVED:			REV. A0	SCALE N/A
			UNIT: mm	SHEET: N/A

