Specifications

备注(Remark)

1.材料(MATERIAL)

胶芯: PA6T+30%G.F UL94V-0, 颜色:黑色.

Housing: PA6T+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN,表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2.特性 (characteristics):

额定电流: 2 AMP

Raring Current: 2 AMP.

接触阻抗: 20 MΩ MAX.

Contact Resistance: 20 MΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

LC@SC 立创
WWW.SZLCSC.COM

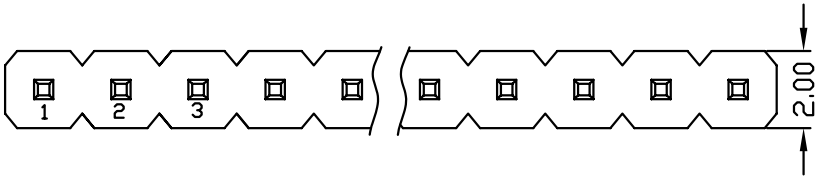

SP2.0*8(双排16芯) /排针

Ordering Information

P2XX-11 XX XX X S XXX X 1

HEIGHT OF HOUSING
10:1.0mm
15:1.5mm
20:2.0mm

NO.OF PINS PER ROW
2~40P

Contact Plating

Full Of Gold	Semi-gold
A0=0.8u"	B0=0.8U"
A1=1u"	B1=1U"
A2=1.5u"	B2=1.5U"
A3=2u"	B3=2U"
A4=3u"	B4=3U"
A5=5u"	B5=5U"
A6=10u"	B6=10U"
A7=15u"	B7=15U"
A8=20u"	B8=20U"
A9=30u"	B9=30U"

S1=Ordinary Tin Plated
S2=Matte Tin Plated
S3=Tin-plated High-temperature

INSULATOR MATERIAL:
B:PA6T
C:PA9T
D:LCP

LENGTH OF TERMINAL

PACKING
A:PE Bag
B:TOPE & Reeb
C:Tube
D:Tube+CAP
E:Tray



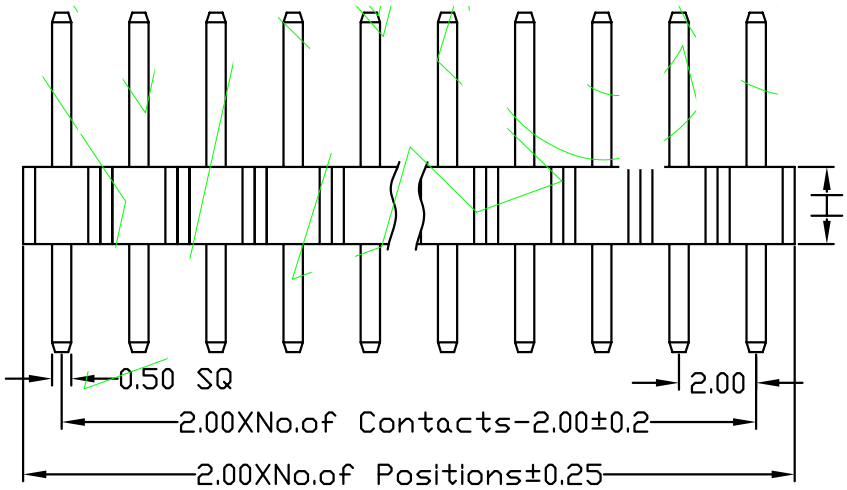

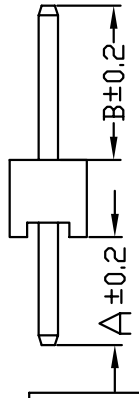

Dimension antitheses list					
ITEM	A	B	H		
Standard	2.8	4.0	1.0	1.5	2.0
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE

OPERATION	
X.X	±0.25
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

SCALE	Fit				
UNIT	MM				
SIZE	A4	DESIGN	卢小强	PART NO.	P2XX-11XXXXXSXXXX1
SHEET	1/1	CHECK		TITLE:	2.0mm 单排针 180度
PROJ.		APPROVE		Customer No.	