



# INTERCONNECTS


## SERIES 342 • 2,54 GRID BOARD STACKING HEADERS • SINGLE ROW STRIPS

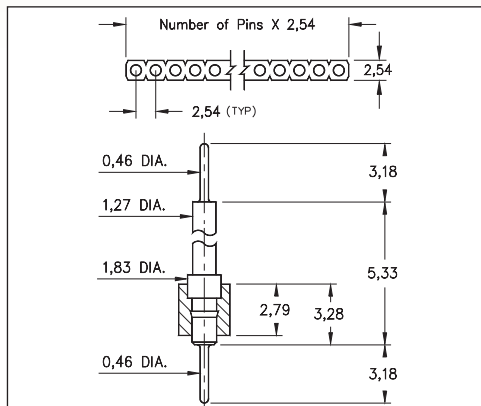


**FIG. 1**

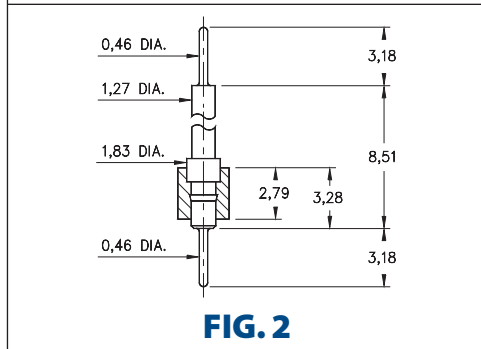

**FIG. 2**

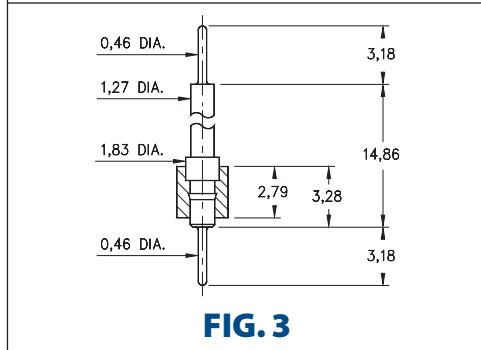

**FIG. 3**

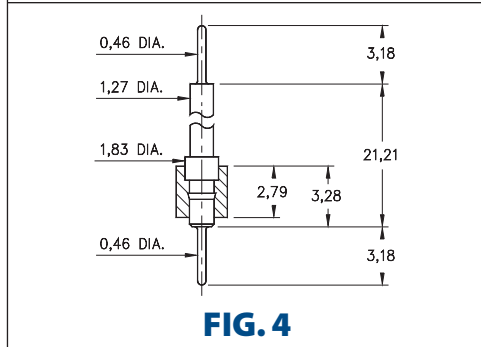


**FIG. 4**

- Series 342 interconnect header strips come in four heights with 0,46 dia. pluggable solder tails at both ends

342...591 uses pin #4259-1 (L = 5,33)  
 342...592 uses pin #4259-2 (L = 8,51)  
 342...593 uses pin #4259-3 (L = 14,86)  
 342...594 uses pin #4259-4 (L = 21,21)  
 See page 212 for details

- Insulators are high temperature thermoplastic, suitable for all soldering operations

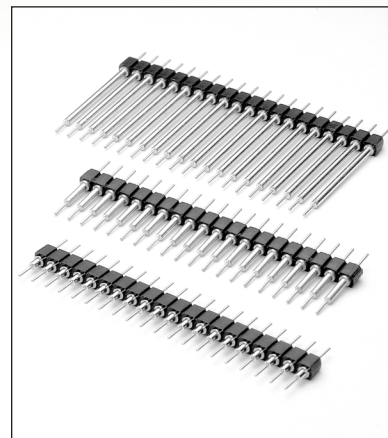

### ORDERING INFORMATION

| FIG. 1                                                                                                                                                                          | Series 342...591 | 0,46 / 0,46 Dia. Solder Tails |                        |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------|------------------------|-----------|
|                                                                                                                                                                                 | 342-XX-1         | -00-591000                    | Specify number of pins | 01-64     |
| FIG. 2                                                                                                                                                                          | Series 342...592 | 0,46 / 0,46 Dia. Solder Tails |                        |           |
|                                                                                                                                                                                 | 342-XX-1         | -00-592000                    | Specify number of pins | 01-64     |
| FIG. 3                                                                                                                                                                          | Series 342...593 | 0,46 / 0,46 Dia. Solder Tails |                        |           |
|                                                                                                                                                                                 | 342-XX-1         | -00-593000                    | Specify number of pins | 01-64     |
| FIG. 4                                                                                                                                                                          | Series 342...594 | 0,46 / 0,46 Dia. Solder Tails |                        |           |
|                                                                                                                                                                                 | 342-XX-1         | -00-594000                    | Specify number of pins | 01-64     |
| <div> <div>RoHS-2<br/>2011/65/EU</div> <div>XX=Plating Code<br/>See Below</div> <div>For<br/>Electrical, Mechanical<br/>&amp; Environmental Data,<br/>See page 264</div> </div> |                  |                               |                        |           |
| SPECIFY PLATING CODE XX=                                                                                                                                                        |                  | 10                            | 90                     | 40        |
| Pin Plating                                                                                                                                                                     |                  | 0,25µm Au                     | 5,08µm Sn/Pb           | 5,08µm Sn |