



标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

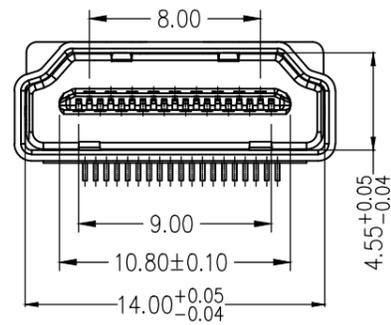

WITHOUT COVER

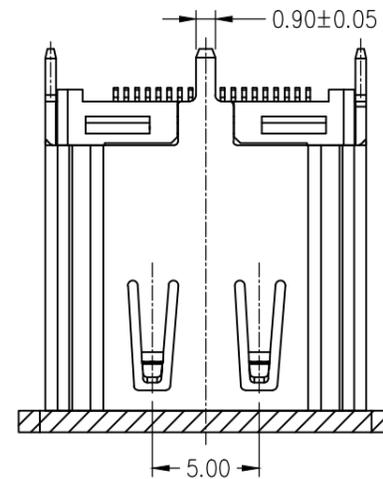

NOTE:

1. MATERIAL:

HOUSING AND BRACKET: HIGH TEMP. THERMOPLASTIC, COLOR: BLACK.

CONTACT: COPPER ALLOY, THICKNESS=0.20MM

SHIELD: COPPER ALLOY, THICKNESS=0.50MM

2. FINISH:

CONTACT: GOLD PLATING ON CONTACT AREA SEE NOTE

G/F PLATED ON SOLDER TAILS

50u" MIN. NICKEL UNDER PLATED OVER ALL

3. MECHANICAL CHARACTERISTICS

INSERTION FORCE: 44.1N MAX

EXTROCTION FORCE: 9.8N MIN, 39.2N MAX

MATING CYCLE:10000 CYCLES

4. ELECTRICAL CHARACTERISTICS

RATING CURRENT: 0.5A

RATING VOLTAGE: 40V

CONTACT RESISTANCE: 10 MILLOHMS OHMS MAX

(EXCLUDING CONDUCTOR RESISTANCE)

INSULATION RESISTANCE:






a, UNMATED: 100M OHMS MIN AT 500 VDC

b, MATED: 10M OHMS MIN AT 150 VDC

DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/1MINUTE

OPERATING TEPEPERATURE: -20° C--+85° C

STORAGE TEMPERATURE: -20° C--+65° C

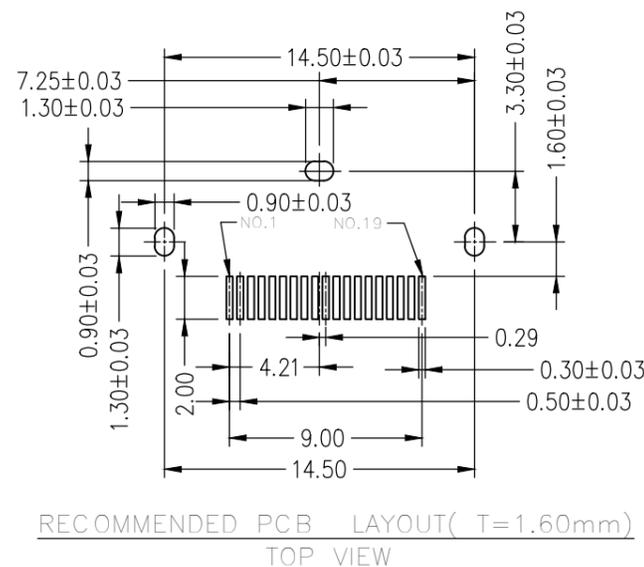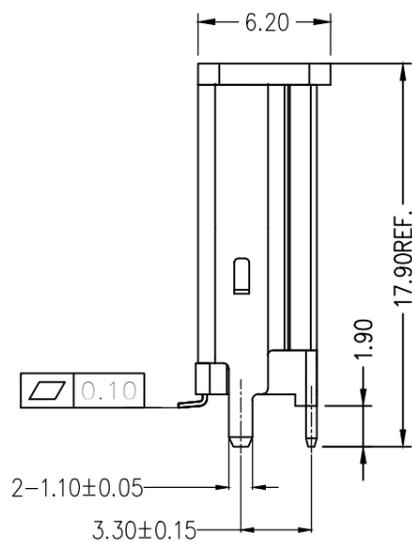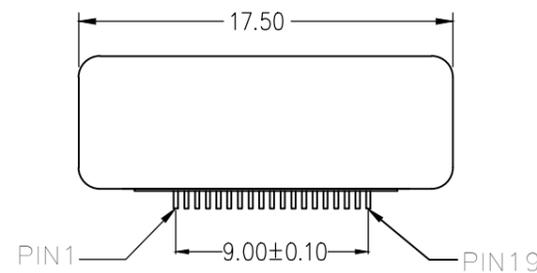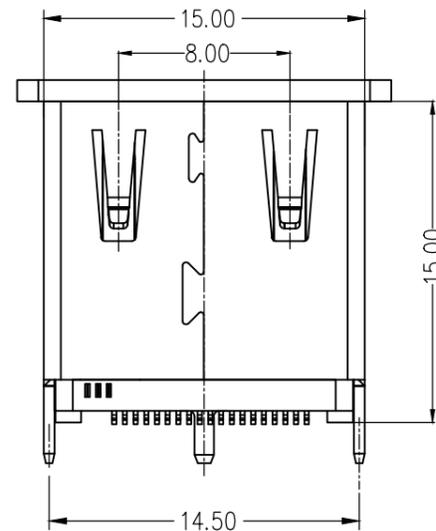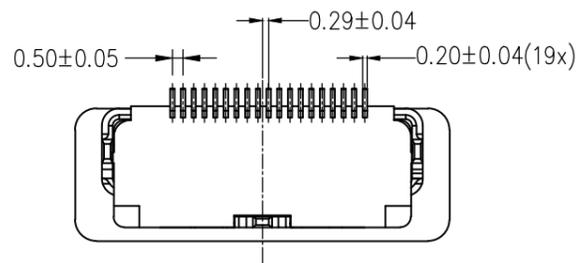

3	外壳	铜	镀镍	
2	接触	铜	镀金	
1	基座	LCP	黑色	
序号	品名	材质	电镀/颜色	备注

 深圳市虹成电子有限公司 GENERAL TOLERANCES (UNLESS SPECIFIED) .0 ±0.30 .00 ±0.25 .000 ±0.15 X.° ±1.00°	品名 TITLE	HDMI		
	料号 PART NO	HC-HDMI0019L-006E		
比列 SCALE	1:1	制图 DRAW	AhYe	
单位 UNIT	MM	审核 CHECKED	夏操云	
张数 PART NO	1 OF 1	批准 APPROVE	赵亮亮	
版本 REV	A			