

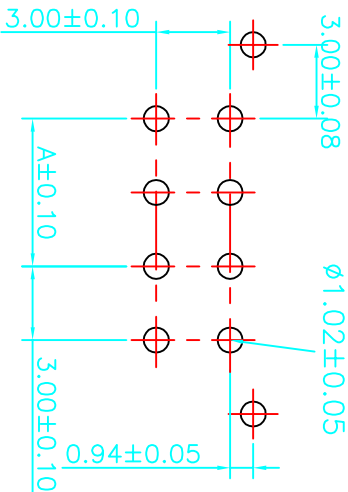
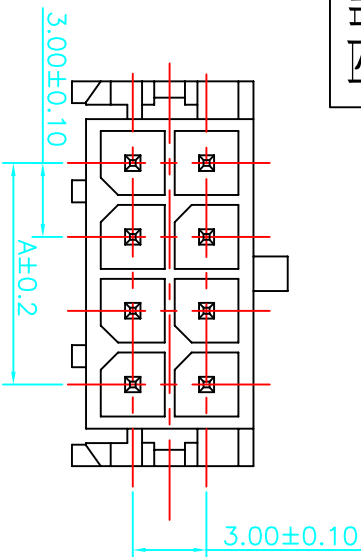


# 成品图

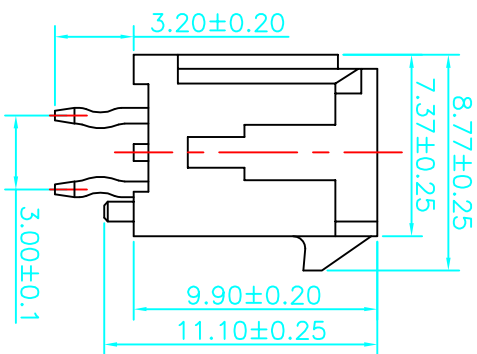

P.C.B LAYOUT

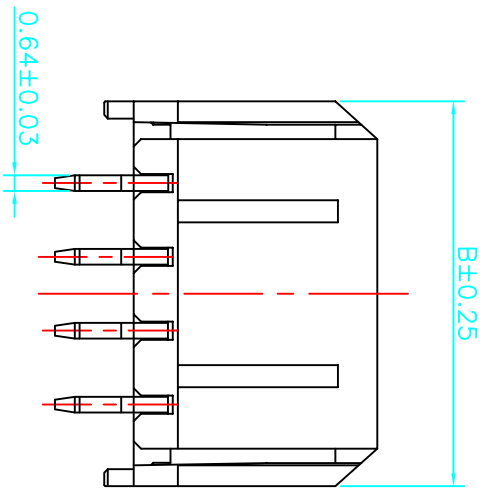

## SPECIFICATIONS

Current Rating: 5A~8A AC/DC  
 Voltage Rating: 500V AC/DC  
 Temperature Range: -45°C ~ +105°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: PA46/LCP GF30%, UL94V-0  
 Color: Natural(Black)

## Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C3030WV-2X01P	---	6.65
C3030WV-2X02P	3.00	9.65
C3030WV-2X03P	6.00	12.65
C3030WV-2X04P	9.00	15.65
C3030WV-2X05P	12.00	18.65
C3030WV-2X06P	15.00	21.65
C3030WV-2X07P	18.00	24.65
C3030WV-2X08P	21.00	27.65
C3030WV-2X09P	24.00	30.65
C3030WV-2X10P	27.00	33.65
C3030WV-2X11P	30.00	36.65
C3030WV-2X12P	33.00	39.65

深圳市连欣科技有限公司

UNIT: mm SCALE: 1 of 1 SHEET TITLE: 3.00mm PITCH 180°WAFER, MICRO-FIT  
 DRAWN BY: APPROVED BY: CHEN 2019.09.05  
 GENERAL TOLERANCE:

REV.	DESCRIPTION	DATE	UNIT	SCALE	SHEET	TITLE	PART NO.:	REV.
A0	NEW RELEASE	2019.09.05	X.XX±0.25	ANGLE±			XDWF-C3030WV-2*NP	AO
			X.XX±0.15					
			X.XXX±0.05					