

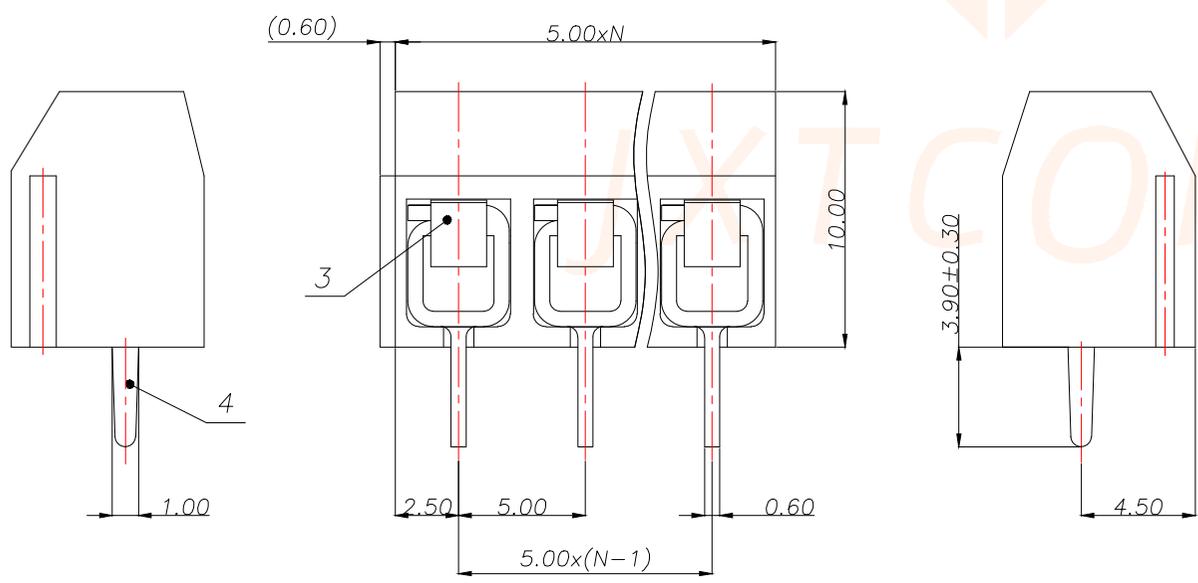


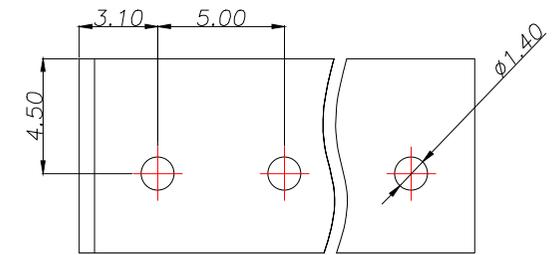

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

General tolerances(mm)														0.1/10
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL Standard	B	C	D
Rated Voltage(V)/Current(A)	300/10	/	/
IEEC Standard			
Overvoltage Category/Pollution Degree	III/3	III/2	II/2
Rated Voltage(V)/Current(A)	/	250/15	/
Withstanding Voltage(V/1min)	/	AC2000	/
Torque Tightening(N·m/Lb.in)	M2.5, 0.29/2.60		
Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.75~1.5/22~14		
Pitch(mm)/Poles	5.0/N=02~24P		
Stripping length(mm)	5~6		
Operating temperature(°C)	-30~+120		
Conform to RoHS	Yes		

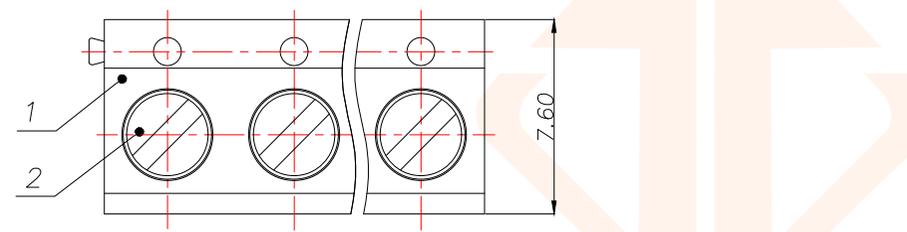

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper alloy	M2.5/Sn Plated
3	Spring	Stainless steel	
2	Screw	Steel	M2.5/Zn Plated
1	Housing	PBT	UL94V-0

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
		PART NO.	TITLE:
		C50301V-NP1D56	Socket-type terminal
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG
MATERILA	---	CHED: Olvia	SCALE SHEET N:A 1/1
FINISH	---	APPD: Ava	