






**RoHS+REACH**

NO.	COMPONENTS	MATERIALS	SPECIFICATION: FINISH/COLOR	QTY.
1	HOUSING	Nylon UL94V-0	BLACK	1

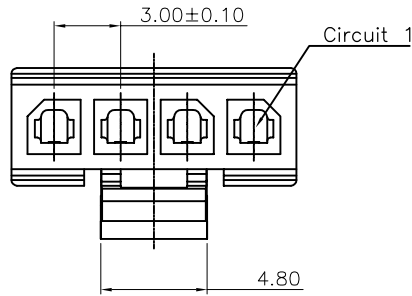

NOTE (UNLESS OTHERWISE SPECIFIED):

1. ALL MATERIAL MUST BE COMPLY WITH ROHS+REACH.
2. PRODUCT PERFORMANCE:
  - 2.1 RATED VOLTAGE (MAX.): 250V AC/DC
  - 2.2 RATED CURRENT (MAX.): 5.0A AC/DC
  - 2.3 DIELECTRIC STRENGTH: 1000V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
  - 2.4 INSULATION RESISTANCE: 1000 MΩ MIN. 500VDC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
  - 2.5 CONTACT RESISTANCE: 10 mΩ MAX.
  - 2.6 AFTER ENVIRONMENTAL TESTING: 20 mΩ MAX
  - 2.7 OPERATING TEMPERATURE: -40° C to +105° C
3. PART NO. LEGEND: 30001-069XXX-A2XXX

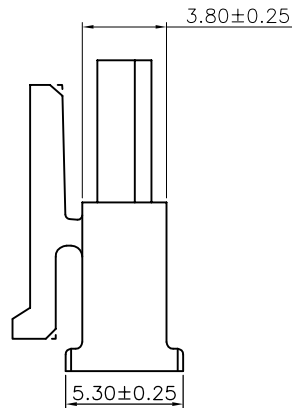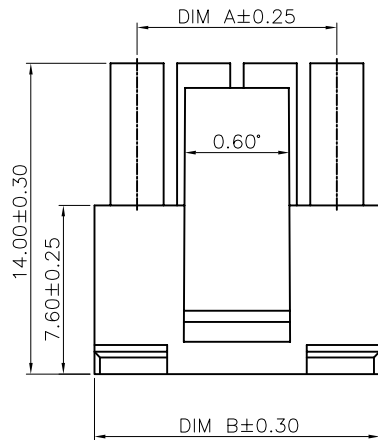

WATER CODE

004:04PIN

WATER CODE	PIN	Dimensions (mm)	
		A	B
	03	6.00	9.85
A2001	04	9.00	12.85
A2001	05	12.00	15.85
	06	15.00	18.85
	07	18.00	21.85
	08	21.00	24.85
	09	24.00	27.85
	10	27.00	30.85
	11	30.00	33.85
	12	33.00	36.85


5.0				DRAWING:
4.0				TGC
3.0				CHECKED:
2.0				
1.0	21.08.30	NEW	TGC	APPROVAL:
REV.	DATE	DESCRIPTION	DRAWING	

GENERAL TOLERANCE	
.X: = ±0.30	.X*: = ±2°
.XX: = ±0.20	.XX*: = ±1°
.XXX: = ±0.10	.XXX*: = ±0.5°
UNIT: MM	PROJECTION:
SCALE: 1/1	
SHEET: 1/2	




DESCRIPTION:	3.0 Pitch Crimp Style Connectors	
PART NO:	30001-069XXX-A2XXX	REV: 1.0
DRAWING NO:	UK0482	SIZE: A4


**RoHS+REACH**




2PIN

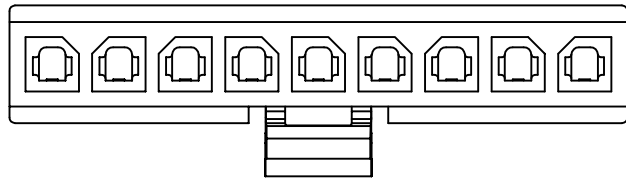


9PIN

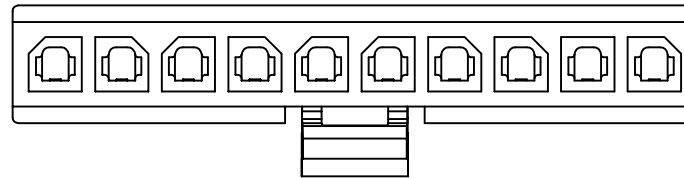


10PIN




3PIN

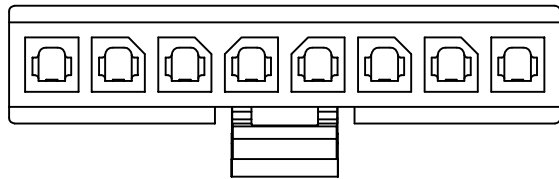


8PIN

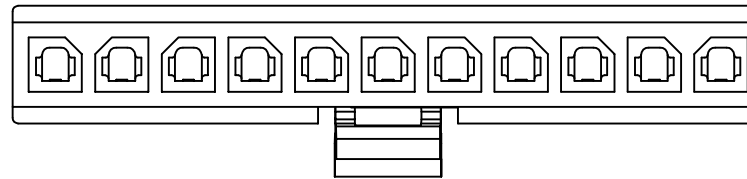


11PIN




4PIN

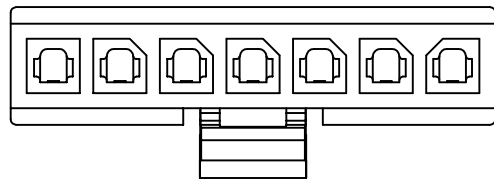


7PIN

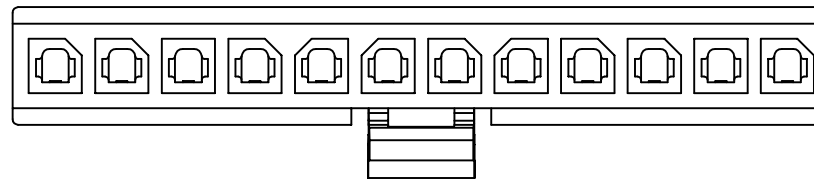

12PIN

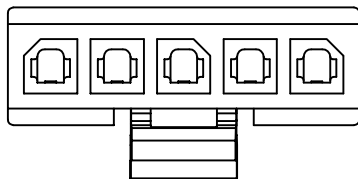

5PIN

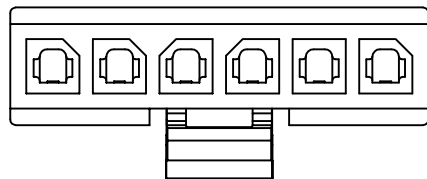

6PIN

5.0			
4.0			
3.0			
2.0			
1.0	21.08.30	NEW	TGC
REV.	DATE	DESCRIPTION	DRAWING

DRAWING:	GENERAL TOLERANCE	
TGC	.X: = ±0.30	.X°: = ±2°
CHECKED:	.XX: = ±0.20	.XX°: = ±1°
APPROVAL:	.XXX: = ±0.10	.XXX°: = ±0.5°
UNIT:	MM	PROJECTION:
SCALE:	1/1	
SHEET:	2/2	



DESCRIPTION:		3.0 Pitch Crimp Style Connectors	
PART NO:	30001-069XXX-A2XXX	REV:	1.0
DRAWING NO:	UK0482	SIZE:	A4