



PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)

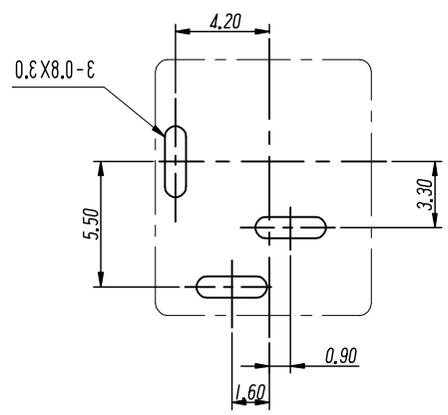

SCHMATIC



技术特性:

- 使用条件: -30~70°
- 额定负荷: DC30V 2A
- 接触电阻: ≤0.02Ω
- 绝缘电阻: ≥100mΩ DC250V
- 耐压: AC250V(50Hz)/min
- 插拔力: 3~15N
- 寿命: 5000次

序号	名称	数量	材料	备注
6	弯片	1	H62黄铜带(Y) δ=0.30mm	铜锡
5	插针	1	H62黄铜棒	铜锡
4	后盖	1	PBT	黄
3	平片	1	H62黄铜带(Y) δ=0.30mm	铜锡
2	簧片	1	65Mn 锰钢带δ=0.20mm	铜锡
1	底座	1	PBT	黑

DRAWN	C	TITLE: 电源插座
DESIGN		PART NO. DC-012-2.5-MN
CHECKED		PRODUCT NO.
APPROVED		DRAWING NO.
		UNIT:mm SCALE: 1:1 REV:01-1 SHT:10F1

GENERAL TOLERANCES		
0.X	±0.30	X° ±3°
0.XX	±0.20	
0.XXX	±0.10	X.X° ±1°
UNIT	SIZE	SCALE
MM	A4	1:1

浙江创都电子科技有限公司

ECN NO.	REV	DATE	DESCRIPTION	MDF'D	APP'D
	02	2025.05.26	更新盖板结构		
	01	2022.04.27	NEW DRAWING RELEASE		