



PCB LAYOUT
TOP VIEW (TOLERANCE:±0.05)

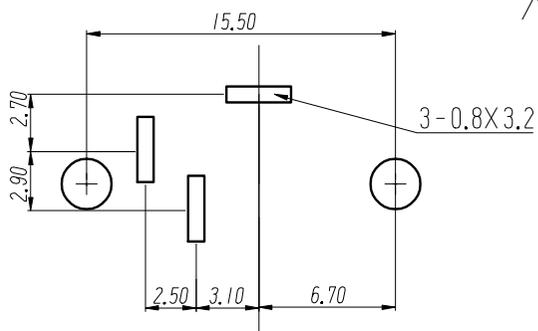

SCHMATIC



技术特性:

使用条件: -30~70°
 额定负荷: DC30V 0.5A
 接触电阻: ≤0.03 Ω
 绝缘电阻: ≥100M Ω DC250V
 耐 压: AC500V(50Hz) /min
 插 拔 力: 3~20N
 寿 命: 5000次

6	盖 板	1	PBT	黄
5	插 针	1	H59黄铜棒	铜镍
4	平 片	1	H62黄铜带(Y) δ=0.30mm	铜镍
3	弯 片	1	H62黄铜带(Y) δ=0.30mm	铜镍
2	弹 片	1	65Mn 锰钢带δ=0.25mm	铜镍
1	基 座	1	PBT	黑
序号	名 称	数 量	材 料	备 注

GENERAL TOLERANCES		
0.X	±0.30	X° ±3°
0.XX	±0.20	
0.XXX	±0.10	X.X° ±1°
UNIT	SIZE	SCALE
MM	A4	1:1

DRAWN		C	TITLE: 电源插座
DESIGN		PART NO.	DC-017-2.5-MN
CHECKED		PRODUCT NO.	
APPROVED		DRAWING NO.	
		UNIT: mm	SCALE: 1:1 REV:01-1 SHT:10F1

浙江创都电子科技有限公司

ECN NO.	REV	DATE	DESCRIPTION	MDF'D	APP'D
	01	2021.12.22	NEW DRAWING RELEASE		