

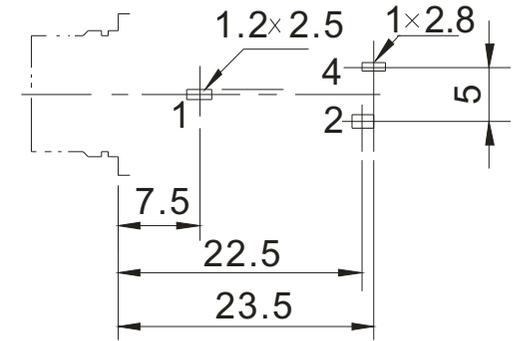
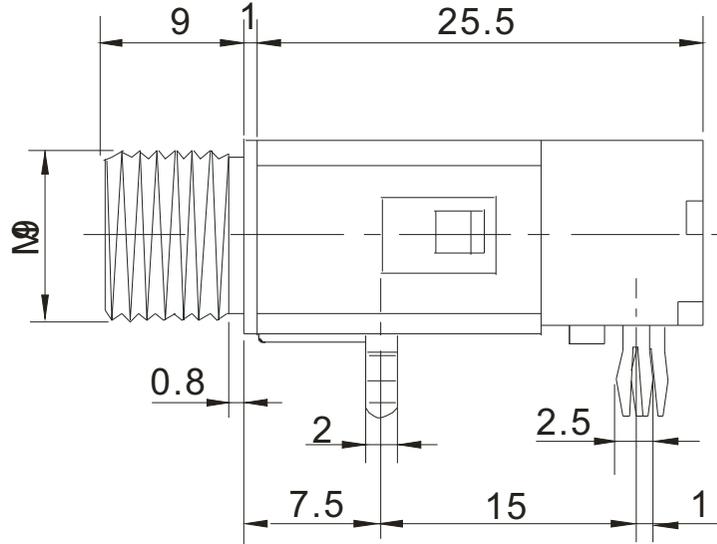
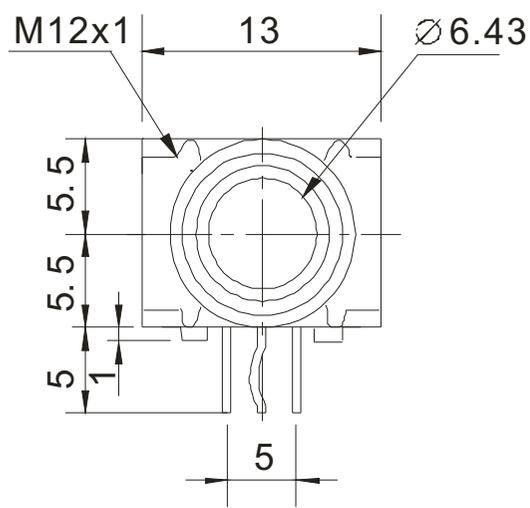




REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED




P. C. B LAND PATTERN



HEX NUT



FLAT WASHER



SCHEMATIC

Specifications:

Rating:DC50V 1A

Force:5-35N

Contact resistance:

Less than30mΩ

Insulation resistance:

Over100MΩ on DC 500V measured.

Voltage withstand:

AC 500V For 1minute,

9	FLAT WASHER	1	STEEL	T=0.5	MB:Ni	
8	HEX NUT	1	BRASS		MB:Ni	
7	SLEEVE	1	BRASS		MB:Ni	
6	T TERMINAL-R	1	BRASS	T=0.4	MB:Cu, Ag	No. 4
5	TIP SPPING	1	BRONZE	Y=0.4	MB:Cu, Ag	No. 2
4	EARTH SPPING	1	BRONZE	Y=0.2	MB:Cu, Ag	
3	IRONAND STEEL	1	STEEL	T=0.5	MB:Cu, Sn	No. 1
2	COVER	1	ABS	94HB	BLACK	
1	HOUSING	1	ABS	94HB	BLACK	
LTR	PART NAME	QTY	MATERIAL		FINISH	REMARK

DSND	ZHANGGUOJING	DATE	201807-12	TOLERANCE	X.X ±0.3	SCALE 2/1	NAME PHONE JACK
CHKD		DATE		X.X X ±0.2			
APPD		DATE		X.X XX ±0.1		UNIT: mm	CAT. NO. PJ-6318-D
				ANGLE ±3.0			

浙江创都电子科技有限公司

DWN. NO.
A-631802