


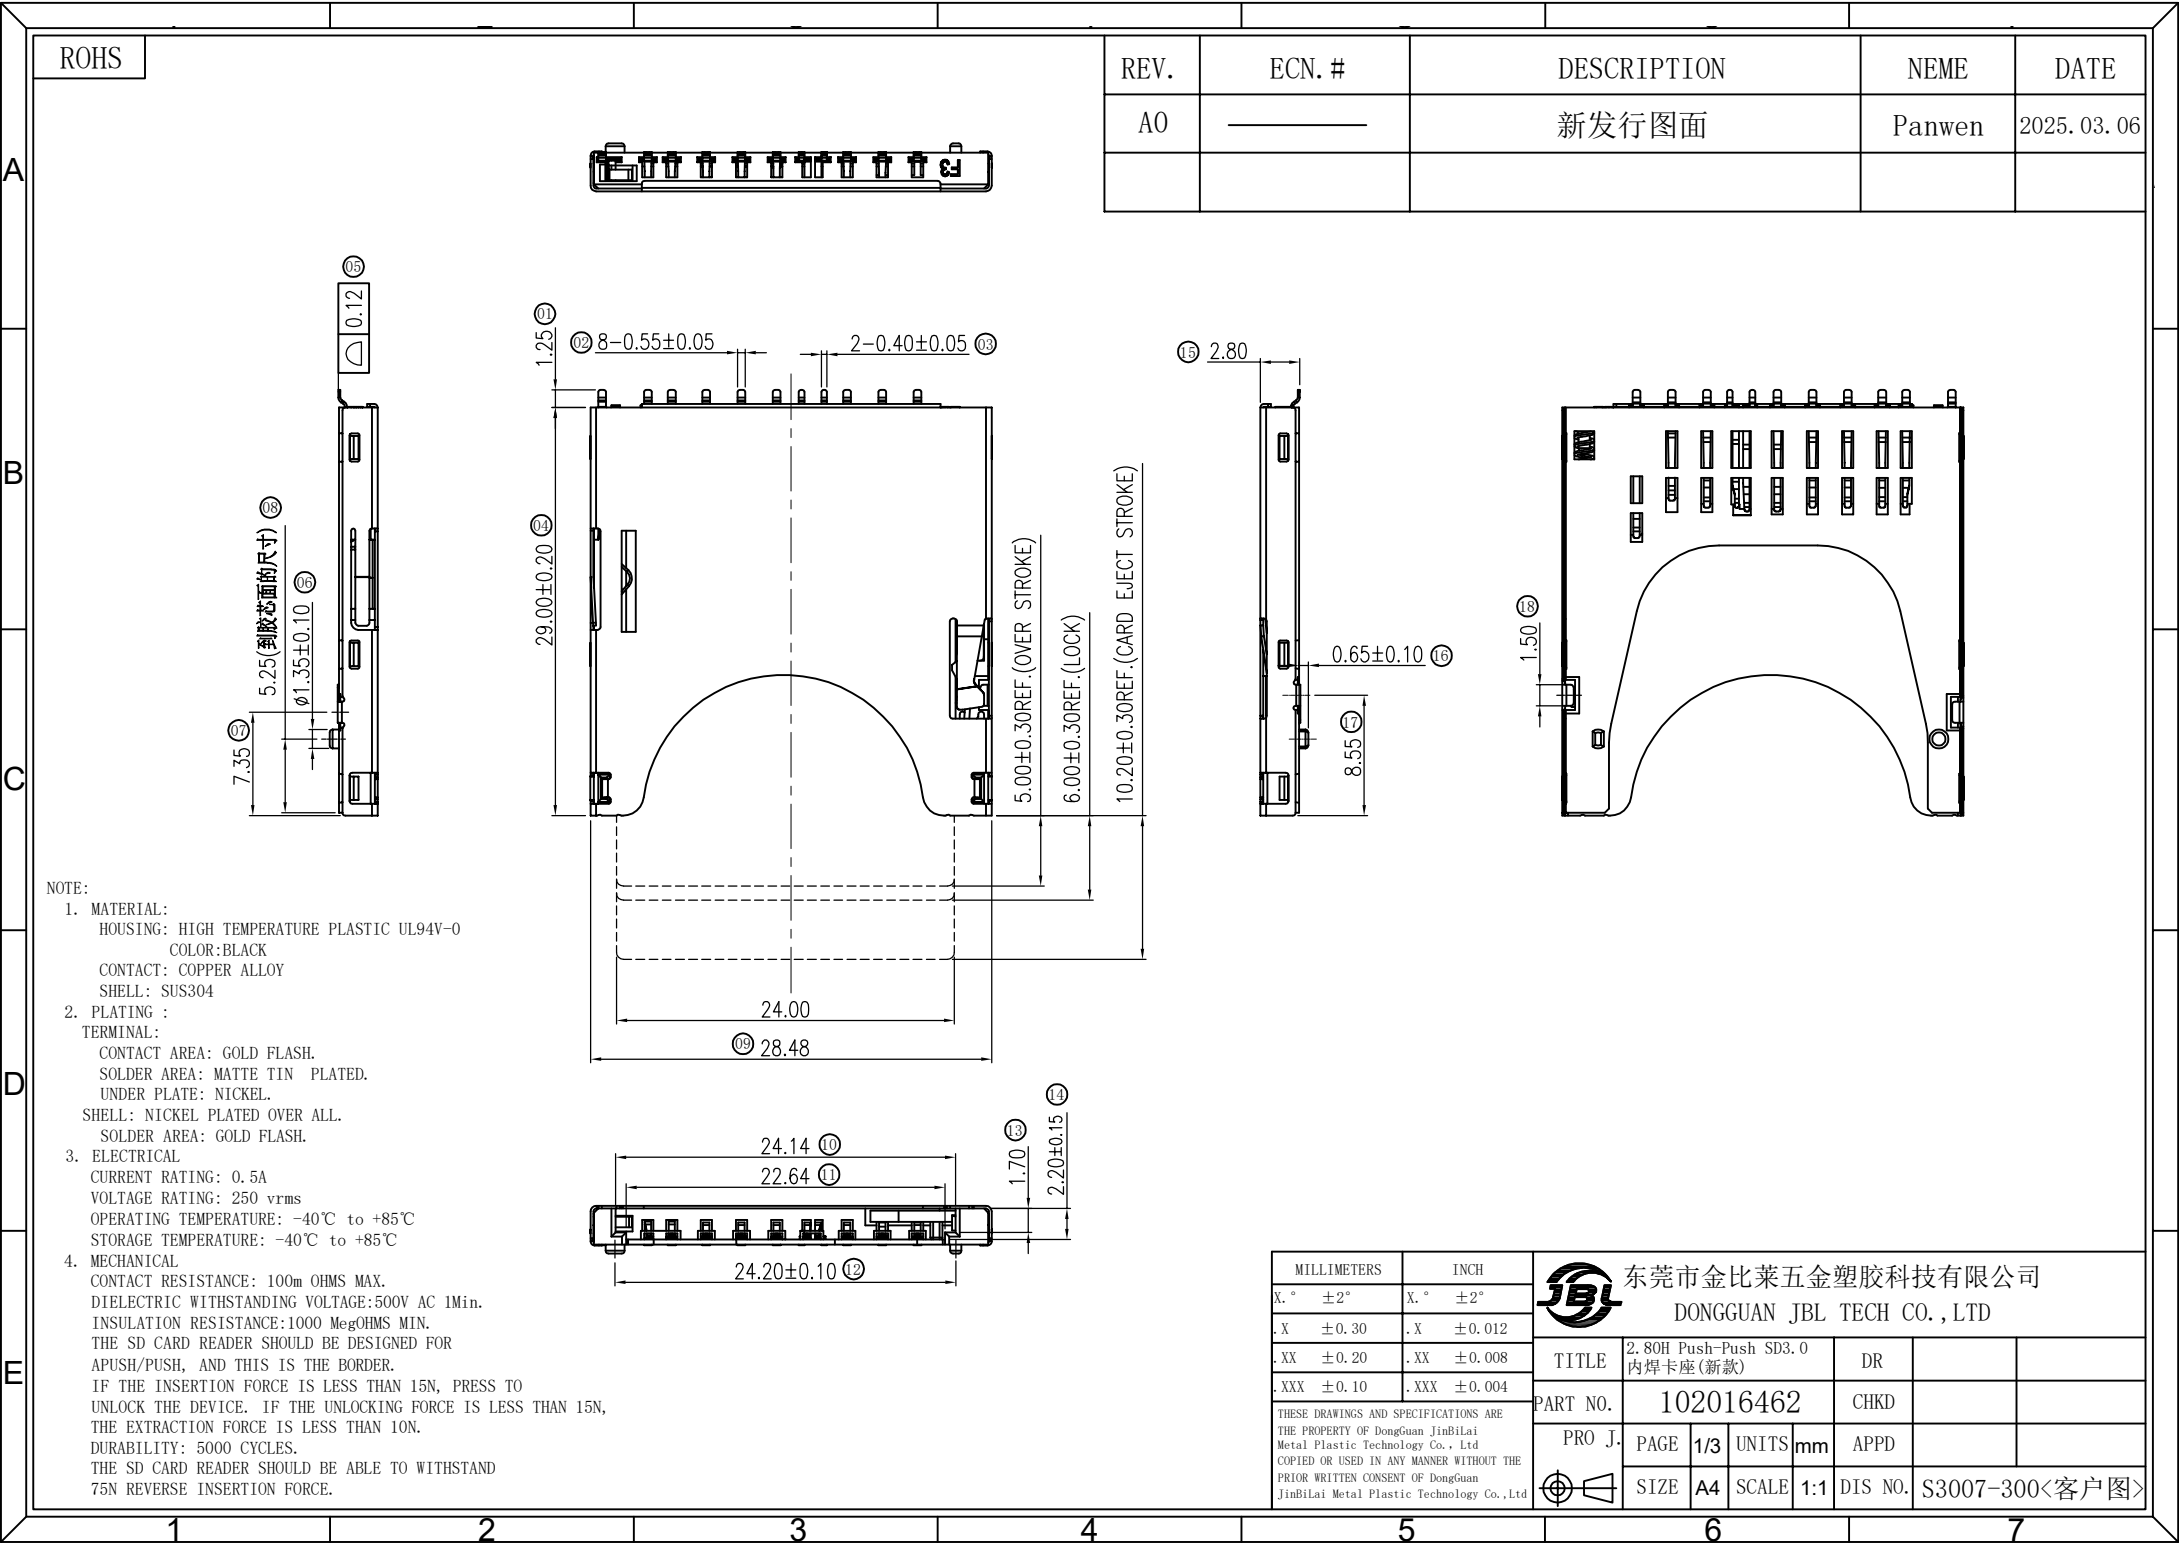

ROHS

REV.

ECN. #

DESCRIPTION

NEME

DATE

A0

新发行图面

Panwen


2025. 03. 06

NOTE:


- MATERIAL:
HOUSING: HIGH TEMPERATURE PLASTIC UL94V-0
COLOR:BLACK
CONTACT: COPPER ALLOY
SHELL: SUS304
- PLATING :
TERMINAL:
CONTACT AREA: GOLD FLASH.
SOLDER AREA: MATTE TIN PLATED.
UNDER PLATE: NICKEL.
SHELL: NICKEL PLATED OVER ALL.
SOLDER AREA: GOLD FLASH.
- ELECTRICAL
CURRENT RATING: 0.5A
VOLTAGE RATING: 250 vrms
OPERATING TEMPERATURE: -40℃ to +85℃
STORAGE TEMPERATURE: -40℃ to +85℃
- MECHANICAL
CONTACT RESISTANCE: 100m OHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC 1Min.
INSULATION RESISTANCE:1000 MegOHMS MIN.
THE SD CARD READER SHOULD BE DESIGNED FOR
APUSH/PUSH, AND THIS IS THE BORDER.
IF THE INSERTION FORCE IS LESS THAN 15N, PRESS TO
UNLOCK THE DEVICE. IF THE UNLOCKING FORCE IS LESS THAN 15N,
THE EXTRACTION FORCE IS LESS THAN 10N.
DURABILITY: 5000 CYCLES.
THE SD CARD READER SHOULD BE ABLE TO WITHSTAND
75N REVERSE INSERTION FORCE.

MILLIMETERS	INCH	东莞市金比莱五金塑胶科技有限公司 DONGGUAN JBL TECH CO., LTD			
X. ° ±2°	X. ° ±2°	JBL 2. 80H Push-Push SD3.0 内焊卡座(新款) TITLE DR			
.X ±0.30	.X ±0.012				
.XX ±0.20	.XX ±0.008				
.XXX ±0.10	.XXX ±0.004				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd		PART NO.	102016462	CHKD	
		PRO J.	PAGE 1/3	UNITS mm	APPD
		SIZE	A4	SCALE 1:1	DIS NO. S3007-300<客户图>

ROHS

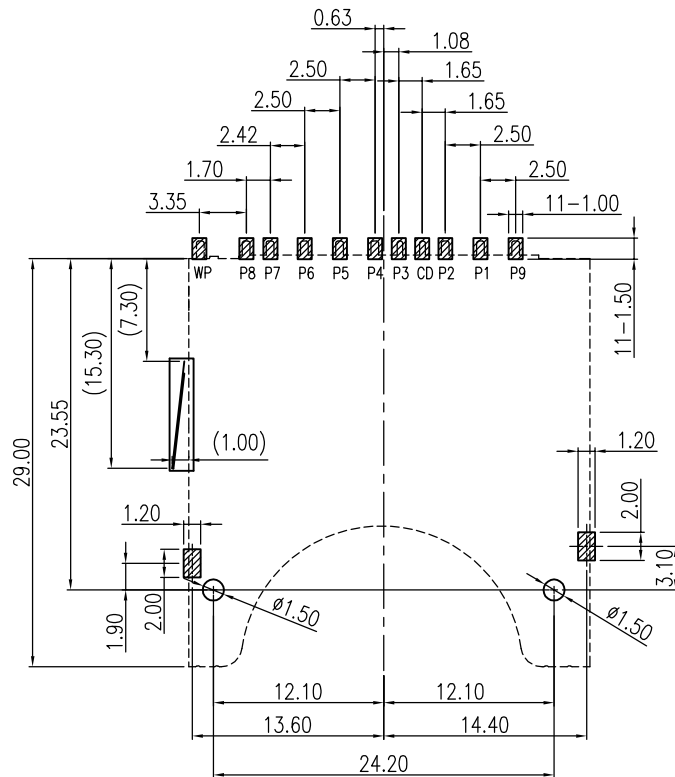


P.C.B LAYOUT

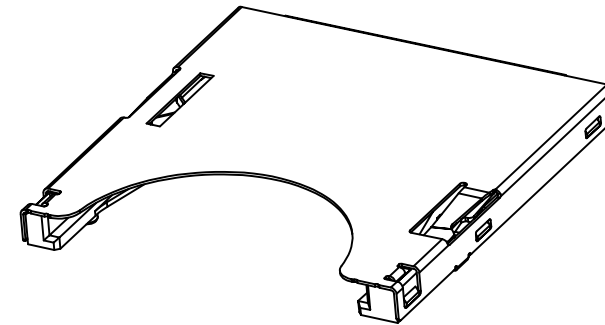

SD CARD PIN DESIGN

PIN NO.	NAME	TYPE	DESCRIPTION
P1	CD/DAT3	I/O/PP	CARD DETECT/DATA LINE(BIT3)
P2	CMD	PP	COMMAND/RESPONSE
P3	VSS1	S	SUPPLY VOLTAGE GROUND
P4	VDD	S	SUPPLY VOLTAGE
P5	CLK	I	CLOCK
P6	VSS2	S	SUPPLY VOLTAGE GROUND
P7	DAT0	I/O/PP	DATA LINE(BIT 0)
P8	DAT1	I/O/PP	DATA LINE(BIT 1)
P9	DAT2	I/O/PP	DATA LINE(BIT 2)

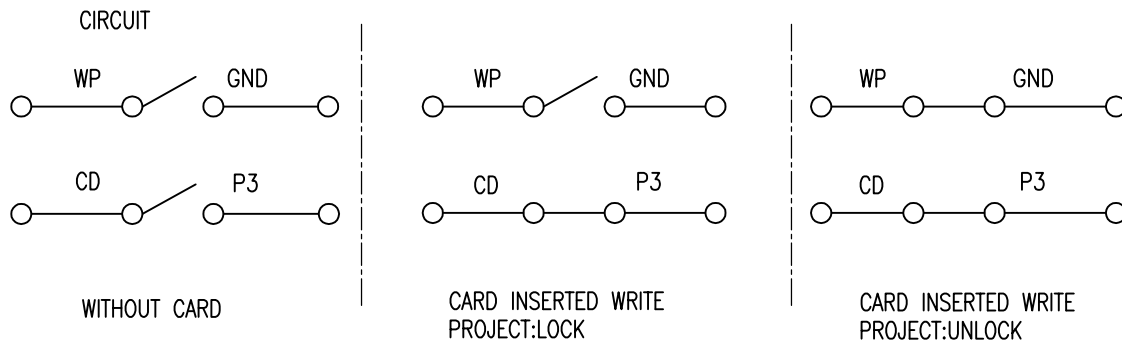

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd	




东莞市金比莱五金塑胶科技有限公司
DONGGUAN JBL TECH CO., LTD

TITLE	2.80H Push-Push SD3.0 内焊卡座(新款)	DR		
PART NO.	102016462	CHKD		
PRO J.	PAGE 2/3	UNITS mm	APPD	
SIZE	A4	SCALE 1:1	DIS NO.	S3007-300<客户图>

ROHS

客户拉出方向

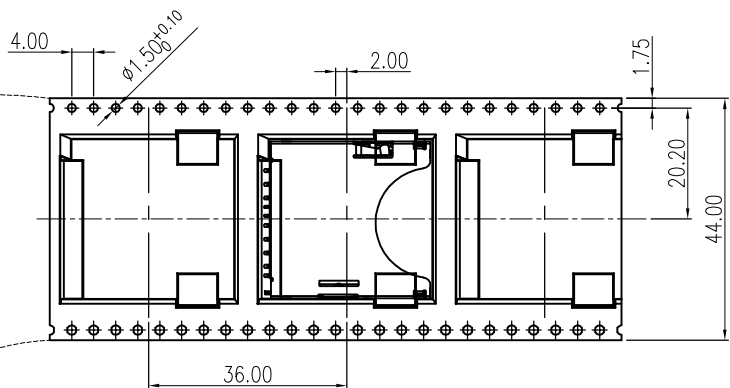

胶带剥离角:165°~180°
剥离力:30~100g

载带


使用方向

DETAIL B


DETAIL B

备注:

- 1、每盘包装数量: 350PCS/盘
- 2、载带包装方式

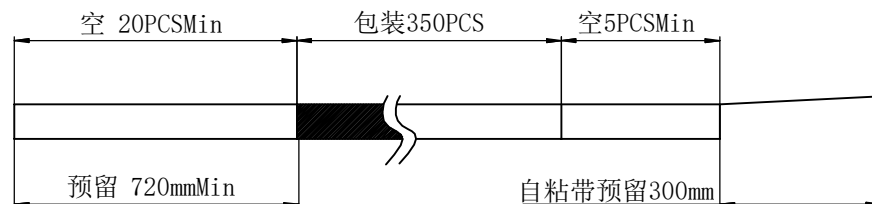

3、包装总数: 2100PCS/箱

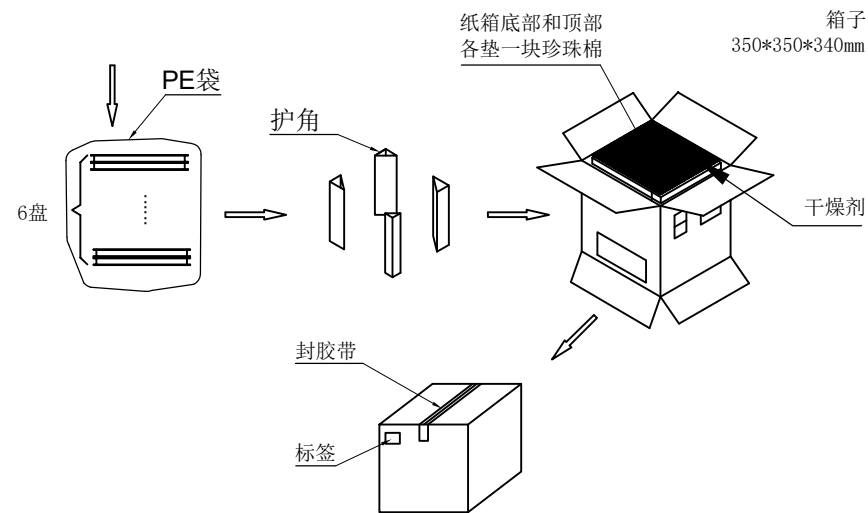

料号	品名规格	数量
303020021	载带, T=0.3, 宽度44.00mm, PITCH=36mm	81.0m
303040009	纸箱 K=K, T=7.0, 350*350*340mm	1PCS
303060001	PE袋 T=0.08mm, 730*760mm, 开口处730mm	1PCS
303070023	自粘带 宽37.5mm 用于宽44mm卷带, 200m/R	82.8m
303110001	护角 K=K, T=7.0mm, 95*95*290mm	4PCS
303130001	珍珠棉 340*340*18mm	2PCS
303180009	卷带, 蓝色, 13英寸*44mm, 直径330	6PCS

MILLIMETERS	INCH	 东莞市金比莱五金塑胶科技有限公司 DONGGUAN JBL TECH CO.,LTD				
X.° ±2°	X.° ±2°					
.X ±0.30	.X ±0.012	TITLE 2.80H Push-Push SD3.0 内焊卡座(新款)		DRAWING		
.XX ±0.20	.XX ±0.008	PART NO. 102016462		CHECKED		
.XXX ±0.10	.XXX ±0.004	PRO J. PAGE 3/3 UNIT mm		APPROVED		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN JBL TECH CO.,LTD COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN JBL TECH CO.,LTD		SIZE A4		SCALE 1:1	DIS NO.	S3007-300<成品图>
		SCALE 1:1		DIS NO.	S3007-300<成品图>	