

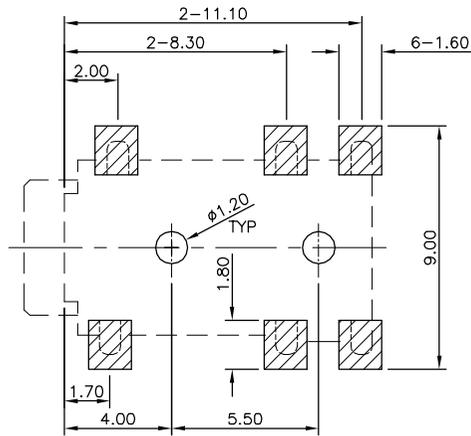
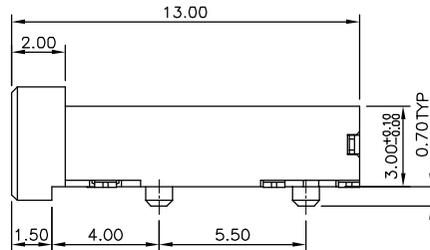
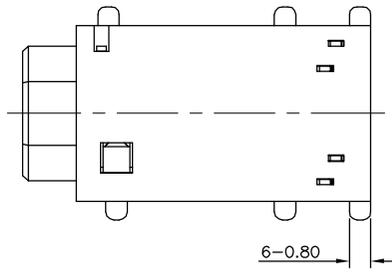



Ø2.50mm 4 POLE PLUG DETAIL DRAWING

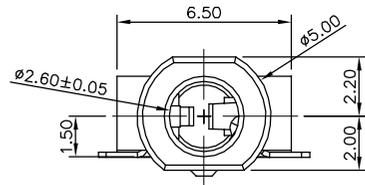

RECOMMENDED P.C.B LAYOUT  
GENERAL TOLERANCE:±0.05mm

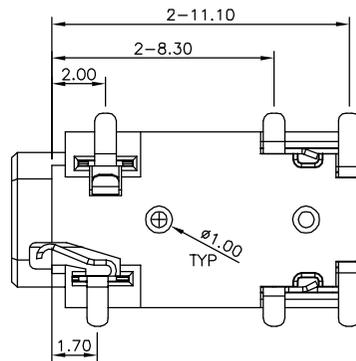

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
D	ECN-06-1404	① x2	修改端子E/F脚材质: 黄铜变更为磷青铜	2010.09.01	李小珍
D1	ECN-P-201312009	① x2	变更C/D端子材质	2013.12.10	张星星

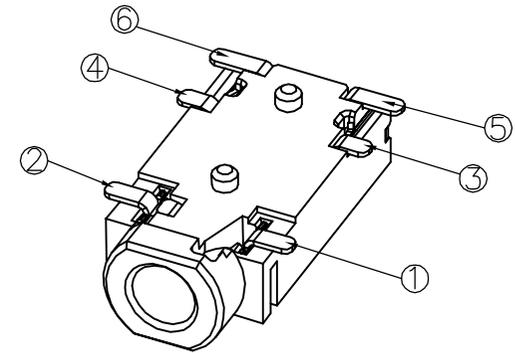

3D VIEW

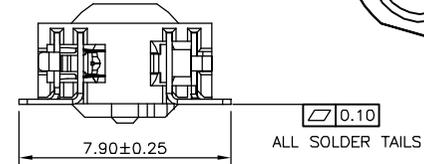


TABLE B:

ITEM	PRODUCT NUMBER	HOUSING COLOR
01	ST-0265S00-065-182	BLACK
02	ST-0265S00-065-A82	PURPLE




NOTES:

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 2.94~29.4(0.30~3.00Kgf).;
- CONNECTOR UNMATING FORCES: 2.94~29.4(0.30~3.00Kgf).;
- PRODUCT MEET THE REQUEST OF THE RoHS, SEE TABLE A:

TABLE A:

MATTER	RoHs ( PPM )
Cd	≤ 100
Pb	≤ 1000
Hg	≤ 1000
Cr6+	≤ 1000
PBB	≤ 1000
PBDE	≤ 1000



SCHEMATIC

07	HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	SEE TABLE B
06	CONTACT F	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
05	CONTACT E	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
04	CONTACT D	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
03	CONTACT C	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
02	CONTACT B	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
01	CONTACT A	1 PCS	PHOSPHOR BRONZE T=0.20mm	Au Plated ①
ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION

This document is the property of GETWELL development corporation.

**G-Switch Electronic Technology Co., Ltd.**

Unless otherwise specified, Tolerance:  
 X. ±0.30  
 X.x ±0.20  
 X.xx ±0.15  
 X.xxx ±0.10  
 Angles ±3°

DESIGN 张星星	DATE 2013.12.10	TITLE:
CHECKED	DATE	PHONE JACK CUSTOMER DRAWING
APPROVED	DATE	
PART NO. SEE TABLE B	REV.: D1	SCALE: 4:1
DRAWING NO. C-ST0265S00-00	SIZE: A4	UNIT: mm
	SHEET: 1/1	

A

B

C

D

E