
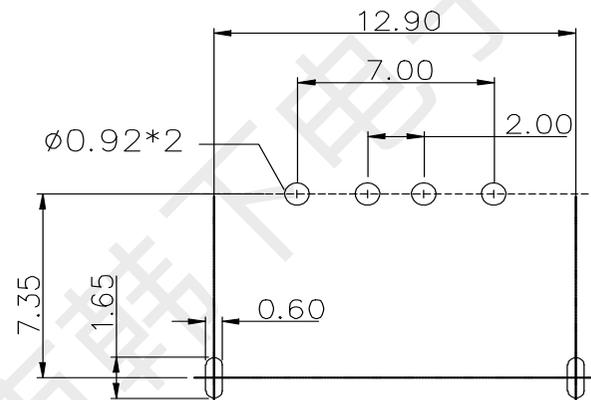
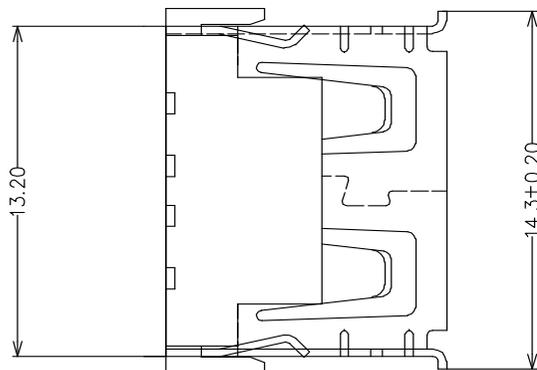
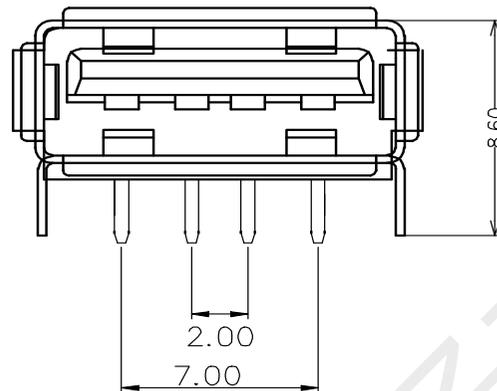


项目 Mapx	变更内容 Modification	日期 Date	修改人 Draw	核准 Approve

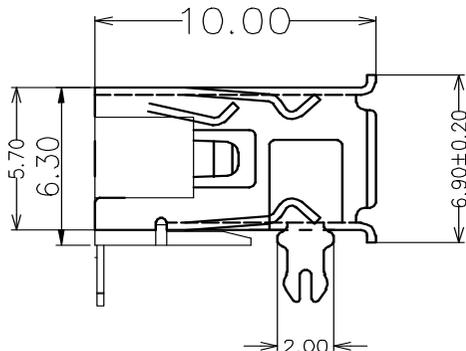

RECOMMENDED P.C.B LAYOUT

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage
500 V AC AT Sea Level

5. 绝缘阻抗: Insulation Resistance
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 35N (MAX)
Unmate force: 7N (MIN)

材料: Material:

1. 塑胶: Housing:
PBT
2. 端子: Contact:
Copper Alloy C2680
3. 外壳: Shell:
SPCC

电镀Finish:

1. 端子: Contact:
Plated Gold in Mating Area,
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating

温度范围: Temperature Range:
-30°C to +80°C

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

成品图 MANUFACTURE DWG		深圳市韩下电子有限公司 HANXIA									
公差一览表 TOLERANCE UNLESS OTHERWISE		日期 DATE	2020.10.20	单位 UNIT	MM	制图 DRAWING	黄彬	DWG NO.			
.X±0.20	X.±5'	审核 CHECKED	张伟	比例 SCALE	1:1	品名 NAME	HX 10.0 QC6.3 JB				
.XX±0.10	.X±2'	核准 APPROVE	罗小春	角法 VIEW		版本 VER		页码 PAGE			
.XXX±0.05	.XX±1'										003