

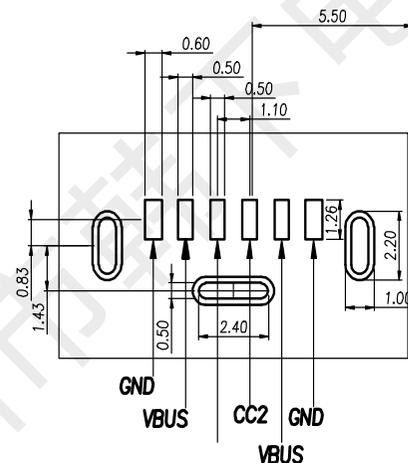

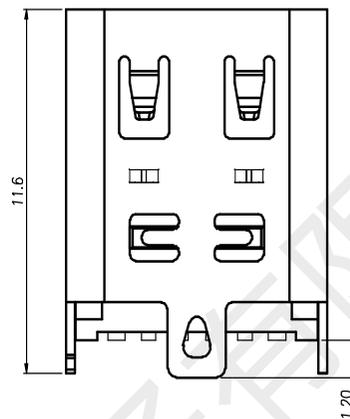
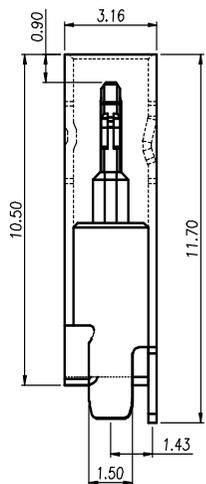


REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码原则发行图面		

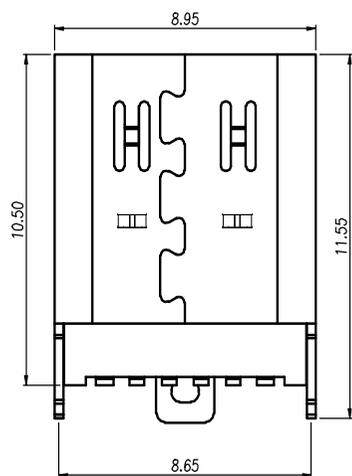

规格说明 Specifications:

- 电气特性 Electrical:
  - 额定电压 (Rated voltage): 5V DC
  - 额定电流 (Rated current): 3A VBUS引脚; 1.25A用于GND引脚, 其他引脚为0.25A.
  - 接触电阻 (Contact resistance): 40mΩ Max
  - 测试条件: 20mv, 100mA下测量.
  - 绝缘电阻 (Insulation resistance): 100MΩ Min
  - 耐电压 (Withstand Voltage): 100V AC
- 机械性能 Mechanical:
  - 插入力 (Mate force): 0.5-2.0Kg
  - 拔出力 (Unmate force): 0.6-2.0Kg
  - 插拔次数 (Durability): 5000 Cycles.
- 材料 Material:
  - 胶芯 (Housing): LCP UL94 V-0
  - 端子 (Contact): C2680, T=0.2mm; 镍底, 镀金
  - 外壳 (Shell): 不锈钢201-H 表面镀镍
- 温度范围 (Temperature Range): -30°C to +80°C.

PIN	SIGNAL NAME
B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND

H	H	=0.9
H	H	=1.5

TOLERANCE	NAME (INTENDED USE) CUSTOMER DRAWING	深圳市韩下电子有限公司 HANXIA
X.X ±0.30 X.' ±10'	PART NO.	TITLE: TYPE-C 6PIN 立式贴片 10.5MM SMT
.XX ±0.20 .X' ± 8'	HX TYPE-C 6P LT 10.5	
.XXX ±0.10 .XX' ± 5'	DESIGN: 李春风	DRAWG NO
UNITS mm	CHEG: 钟华华	
MATERILA	APPD: 罗孝金	
FINISH		SCALE SHEET REV. SCALE SHEET REV