


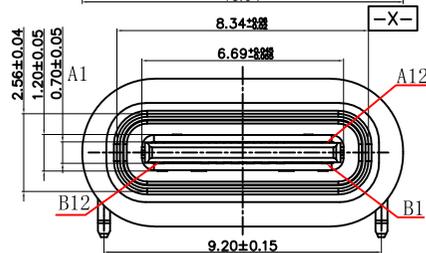
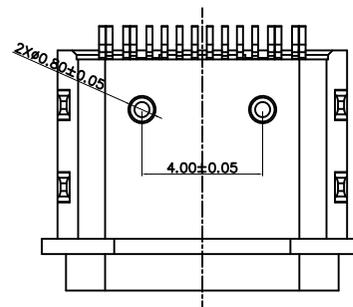
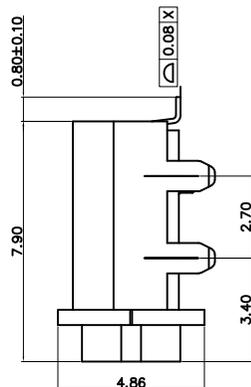
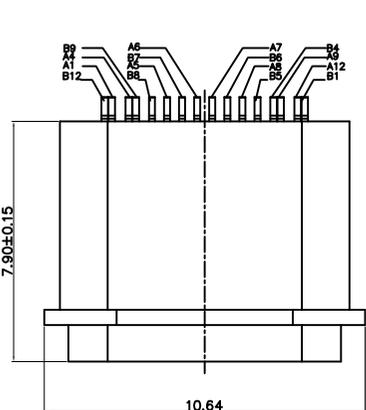
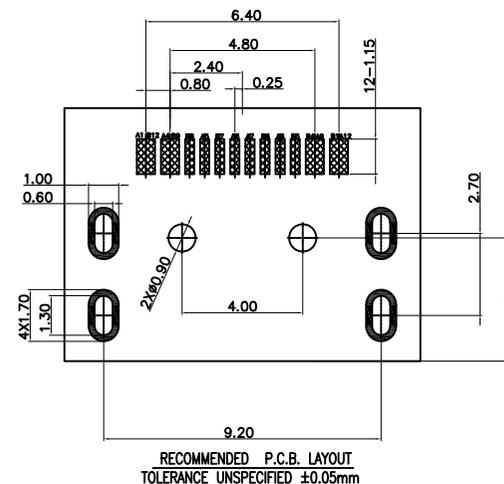




REV.	ZONE	DESCRIPTION	DESIGN	DATE
A		NEW		



### 建议防水圈

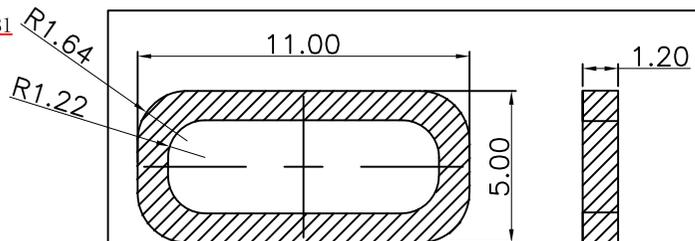

1: 材料: 黑色硅胶, 符合ROHS环境管理物质.  
2: 尺寸: 外径:5X11, 内径:3X9, 胶边厚:1.0, 胶边高:1.5

### NOTES:

- CURRENT RATING: 5A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -40 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES
- Water Resistance: IPX7

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

X. ±0.50	X.* ± 2°	UNITS	深圳市富港科技有限公司
.X ±0.30	.X* ± 1°	mm	
.XX ±0.10	.XX* ± 0.5°	MAT'L	TITLE:
.XXX ± 0.05			TYPE-C 16PIN板上四脚插板防水母座粉末研金壳7级单圈
		FINISH	APPD:
		Q'TY	CHKD:
			DR:
			DWG NO:
			1030019
			SCALE SHEET REV.
			1/1 1/1 A1