




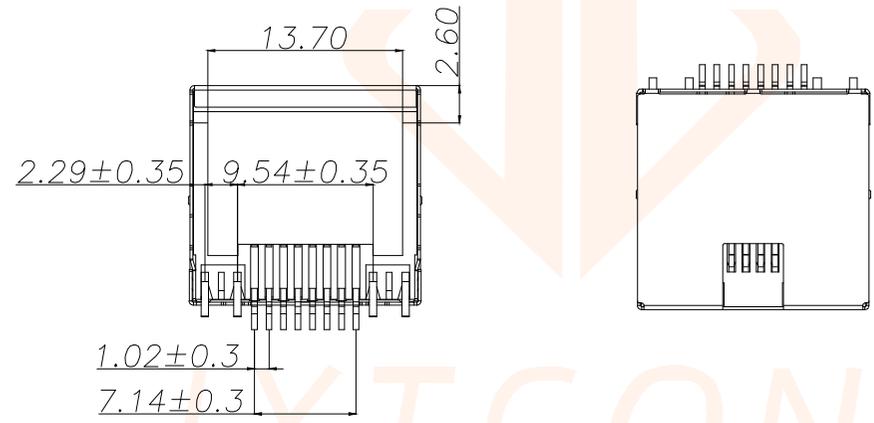

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

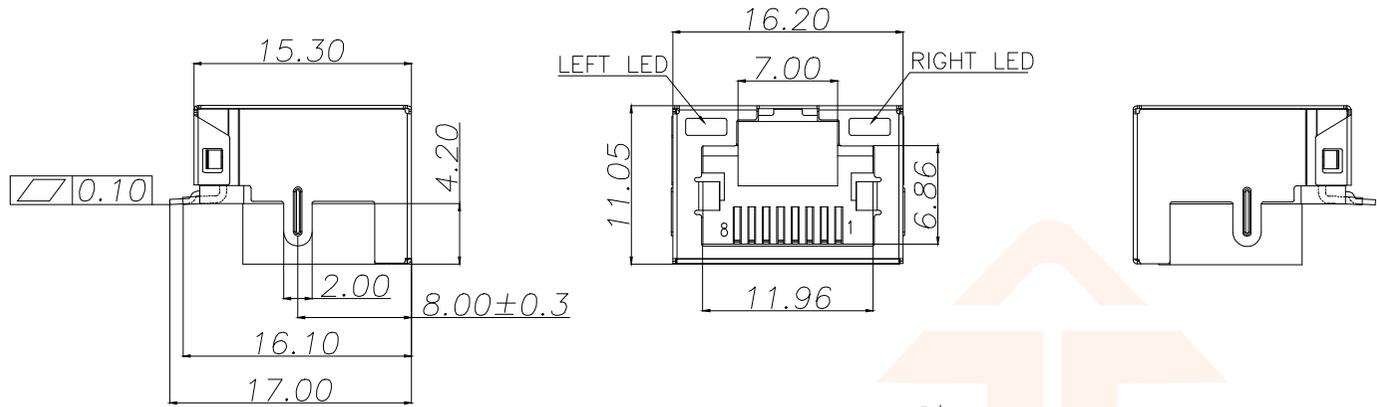

NOTES:

- HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- PLATING: GOLD PLATED ON CONTACT AREA, 100u"MIN. TIN PLATED ON SOLDERING AREA, 50u"MIN. NICKEL PLATED OVERALL.
- SHELL: BRASS, T=0.20. WITH 40u" NICKEL PLATED.
- LED: T=0.50, TIN PLATED.

ELECTRICAL:

- VOLTAGE RATING: 125V AC RMS.
- CURRENT RATING: 1.5AMP.
- CONTACT RESISTANCE: 30MILLIOHMS MAX.
- INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.


MECHANICAL:

- DURABILITY: 750 CYCLES MIN.
- INSERTION FORCE: 22N MAX.
- REMOVAL FORCE (WITHOUT PLUG LOCK): 22N MAX.


ENVIRONMENTAL:

- STORAGE: -40°C~85°C
- OPERATION: -40°C~85°C
- REFLOW SOLDERING Temperature, 255±5°C.

*Apply to the EU standards (ROSH)

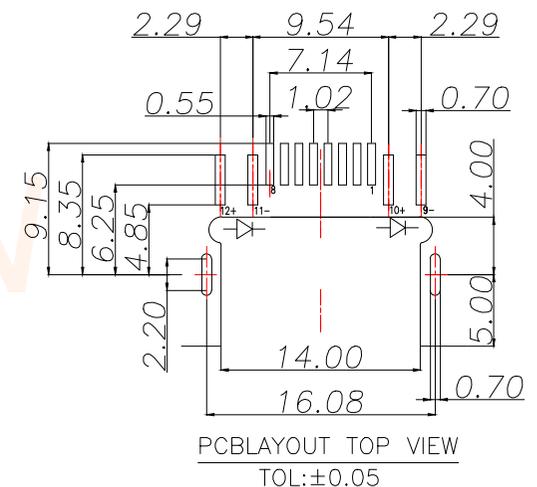

Standard LED Color	LED Wavelength	Foward	Foward
Green	565nm	20mA	1.8-2.4V
Yellow	585nm	20mA	1.8-2.4V
ORANGE	585nm	20mA	1.8-2.8V



8	— / —
7	— / —
6	RX-
5	— / —
4	— / —
3	RX+
2	TX-
1	TX+
PIN	说明

LED Specification

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd	
X.:±0.35	X':±3'	PART NO.	TITLE:
X.X:±0.25	X.X':±2'	RJ45-4045-8P	RJ45 沉板4.2 SMT有壳有灯LCP黑
X.XX:±0.15	X.XX':±1'	DESIGN: Ethan	MANUFACTURE DWG
UNITS	mm	CHED: Olvia	SCALE SHEET N:A 1/1
MATERILA	— — —	APPD: Ava	
FINISH	— — —		