
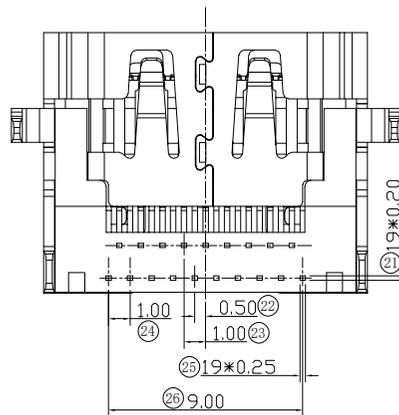
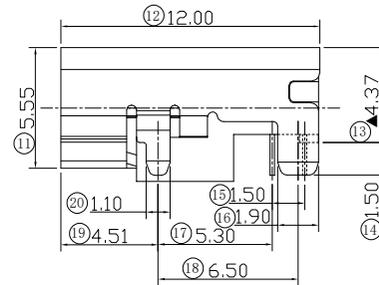
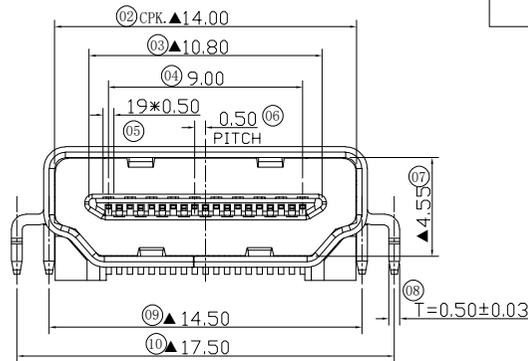
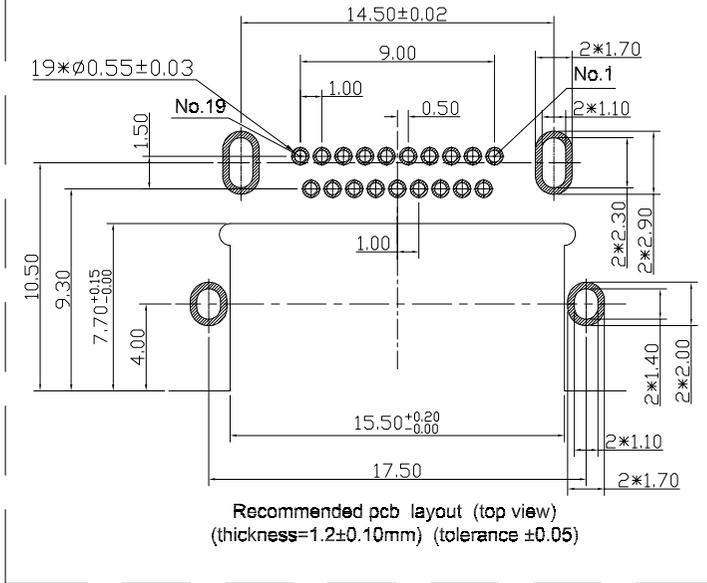


RoHS

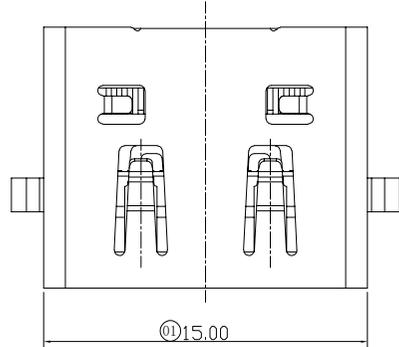

REV.	DESCRIPTION.	ECN NO.	DWG.	CKD.	APPD.	DATE.
A	NEW		Jack	Larry	J.L.Y	2022-11-01

Note:

- Mechanical characteristics
insertion force: 44.1N max
withdrawal force: 9.8N min, 39.2N max
mating cycle: 10000 cycles
- Electrical characteristics
rating current: 0.5A
rating voltage: 40V
contact resistance: 10 milliohms max
(excluding conductor resistance)
insulation resistance:
a, unmated: 100M Ohms min at 500 VDC
b, mated: 10M Ohms min at 150 VDC
dielectric withstanding voltage: 300V AC/1minute
operating teperature: -20°C~+85°C
storage temperature: -20°C~+65°C
- material:
HOUSING: THERMOPLASTICS HIGH TEMP LCP+GLASS
FIBER BLACK COLOR,UL94V-0
CONTACT: Copper Alloy ,T=0.20MM
SHELL: Copper Alloy(SPCC) ,T=0.5MM

AF219-D xx 1BS x 24HWR

端子电镀要求: 外壳电镀要求:



01: 半金雾锡1U" E: 外壳镀镍
02: 半金雾锡3U" G: 外壳镀金
03: 半金雾锡5U"
04: 半金雾锡10U"
05: 半金雾锡15U"
06: 半金雾锡30U"

TOLERANCES UNLESS OTHERWISE SPECIFIED		深圳市辉焕科技有限公司			
UNIT (MM)		ORIGINAL DATA		TITLE	
X. ±0.55		2022-11-01		HD A TYPE 19P DIP母座 沉板4.37MM (第一款)	
X.X ±0.35		DWG.			
X.XX ±0.25		Jack			
X.XXX ±0.15		CKD.		PART NO.	
ANGEL ±2'		Larry		HDMI-AF219-CB4.37	
3RD.ANGLE'S		APPD.		SCALE	
		J.L.Y		1:1	
		DWG NO.		SIZE	
		HDMI-AF219-CB4.37		A4	
		SHEET		REV.	
		1/2		A	

文件
分发
业务
资材
生产
注塑
冲压
工程
IQC
IPQC
文控

RoHS

REV.	DESCRIPTION.	ECN NO.	DWG.	CKD.	APPD.	DATE.
A	NEW		Jack	Larry	J.L.Y	2022-11-01

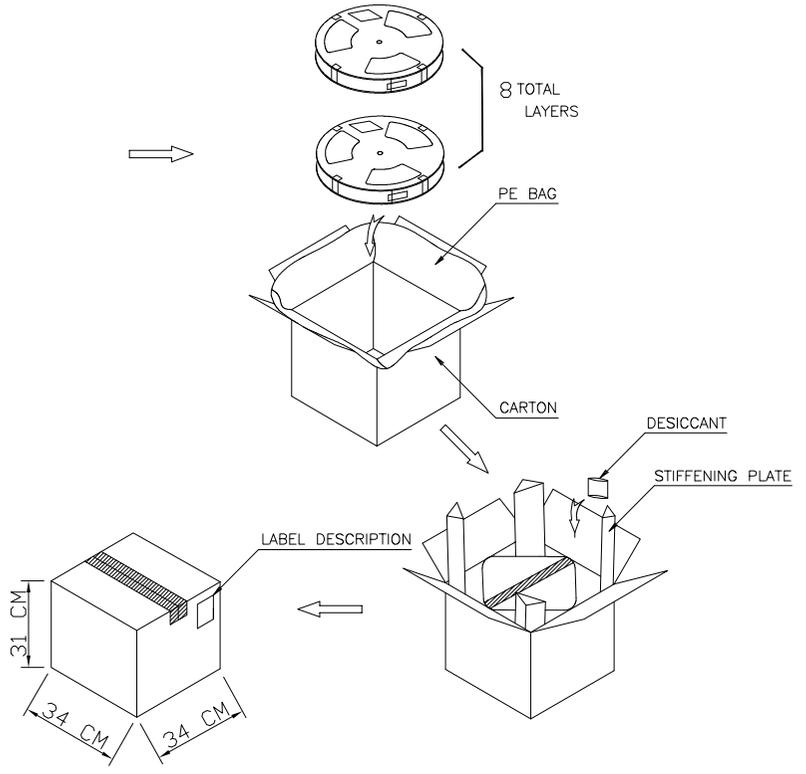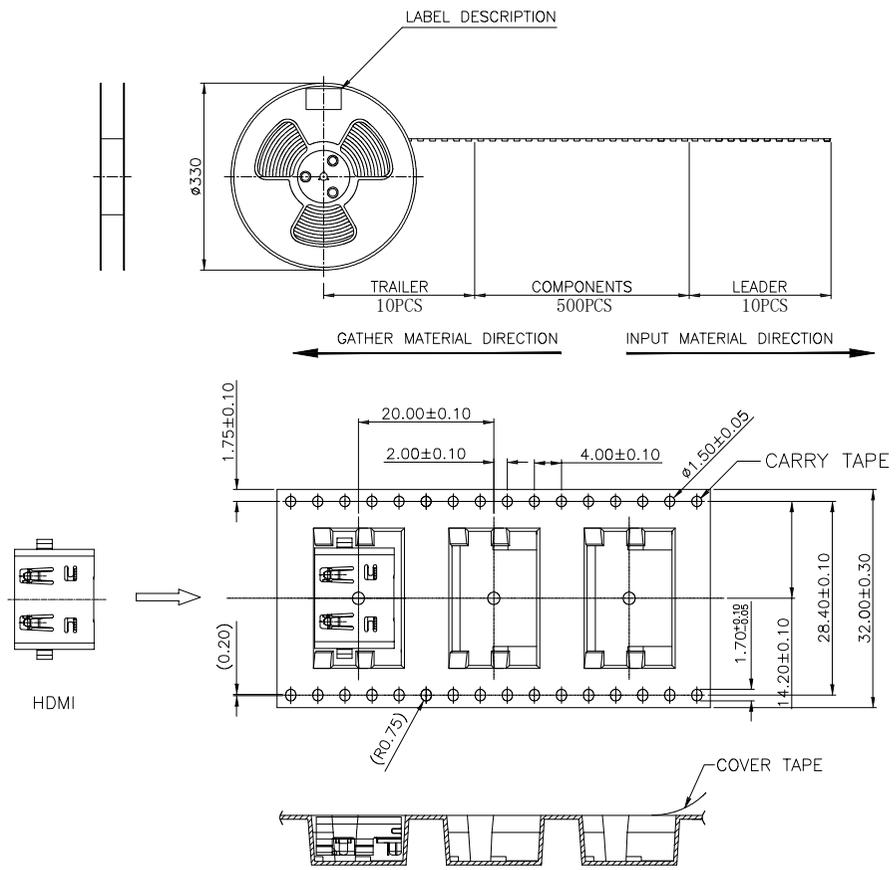

NOTE:
 1. COVER TAPE AND CARRY TAPE PEEL:10g~130g;
 PEEL DEG: 165°~175°; PEEL SPEED:250~300mm/min;
 2. QTY:500PCS/REEL, 8REEL/CARTON, TOTAL:4000PCS/CARTON;

TOLERANCES UNLESS OTHERWISE SPECIFIED		深圳市辉焕科技有限公司			
UNIT (MM)		ORIGINAL DATA		TITLE	
X.	±0.55	2022-11-01		HD A TYPE 19P DIP母座 沉板4.37MM (第一款)	
X.X	±0.35	DWG.		包装规范	
X.XX	±0.25	Jack			
X.XXX	±0.15	CKD.		PART NO.	
ANGEL	±2'	Larry		HDMI-AP219-CB4.37	
3RD.ANGLE'S		APPD.		SCALE	
		J.L.Y		1:1	
		DWG NO.		SIZE	
		HDMI-AP219-CB4.37		A4	
		SHEET		REV.	
		2/2		A	