
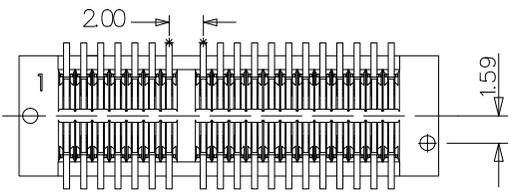
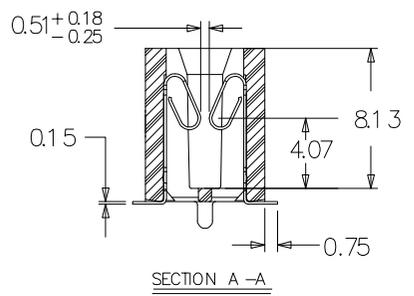


NOTE:
ELECTRICAL
1. CURRENT RATING:2.2 A PER PIN
(2 ADJACENT PINS POWERED)
2.INSULATOR MATERIAL:BLACK LCP
3.VOLTAGE RATING:250 VAC
4.INSULATION RESISTANCE 500MEGA OHMS MIN.
5.AT 100 VDC PHYSICAL
6.CONTACT: COPPER ALLOY
7.OPERATING TEMPERATURE:-55°C TO +125°C

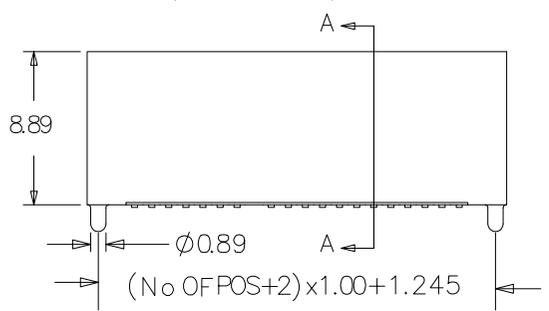

L B 1 0 9 0 - G * * - B * R 0 2


— RUNNING NUMBER
— PACKING: R:REEL
— 0:WITH POSITIONING POSTS
— 1:WITHOUT POSITIONING POSTS
— COLOR:BLACK

— PIN

— PLATING: G:GOLD FLASH
— 1:CONTACT AREA PLATING 3u"Min GOLD.
— F:CONTACT AREA PLATING 10u"Min GOLD.

— HEIGHT:90-9.04H
— 1:1.0 BTB

LXWCONN BTB CONNECTOR SERIES

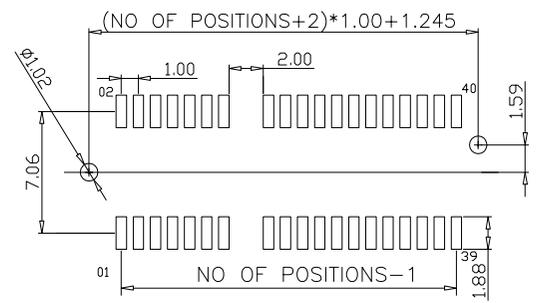

NO OF POS	A	POSITIONS POARIZED
2X5	9.540	3,4
2X8	12.540	5,6
2X10	14.539	13&14
2X20	24.539	15,16
2X30	34.539	21,22
2X40	44.539	31,32
2X50	54.539	41,42
2X60	64.539	31,32,63&64
2X70	74.539	53,54,115&116

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD

制图 (DR): Jerry 2022.10.10
品名(TITLE): MEC1 1.0mm

审核 (CHD):
料号(PART NO): LB1090-G**-B*R02

核准 (APFD): Tong 2022.10.10
比例(SCALE): 1:1
单位(UNITS): mm
张数(SHEET): 1 OF 1
图幅(SIZE): A4

RoHS Compliant 2013/95/EC

修订 (REV)	修改摘要 (REVISION DESCRIPTION)	签名 (SIGNATURE)	日期 (DATE)

一般公差 (GENERAL TOLERANCE)
.X ±0.35
.XX ±0.01
.XXX ±0.05
.XXXX ±0.016
ANGLES ±2°

