




安装尺寸 MOUNTING MEASUREMENT



2WA



3WA

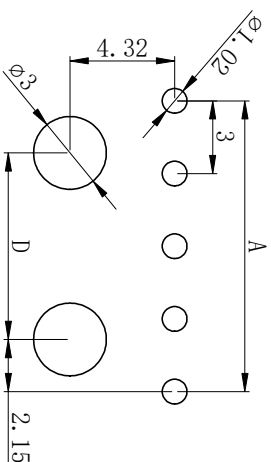

4WA~12WA

D	0	0	4.7	7.7	10.7	13.7	16.7	19.7	22.7	25.7	28.7
C	2.9	2.9	7.6	10.6	13.6	16.6	19.6	22.6	25.6	28.6	31.6
B	9.7	12.7	15.7	18.7	21.7	24.7	27.7	30.7	33.7	36.7	39.7
A	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0
孔数	2	3	4	5	6	7	8	9	10	11	12

- 技术要求 Specification:**
- 1、材质 Material: Rubber shell: PA66 UL94V-0 PIN: H65 (Plating: NiSn)
 - 2、额定电流 Current rating: 5A max
 - 3、额定电压 Voltage rating: 250V AC/DC
 - 4、温度范围 Temperature range: -25°C to +85°C
 - 5、接触电阻 Contact resistance: $\leq 15m\Omega$
 - 6、绝缘电阻 Insulation resistance: $\geq 1000M\Omega$
 - 7、耐压 Withstand voltage: 1000V AC/minute
 - 8、插针的固定力 Fixing force of pins: $\geq 25N$
 - 9、适配的插头 Adaptable plug: HX30001-P (43645-P)
 - 10、适用基板厚度 Applicable PC board thickness: 1.6mm
 - 11、产品无严重损伤、缺针、长短针、旋转针等缺陷:
插针镀层无脱落、起皮、发黄等缺陷。
- The product has no defects such as serious injury, lack of needle, long needle and rotating needle.
The coating of the pin has no defects such as abscission, peeling and oxidable.

未注公差表 DIMENSIONAL TOLERANCE TABLE	设计 DRAWN BY	王鹏程	产品名称 PRODUCT NAME	针座 WAFER
≤ 3 ± 0.1	审核 CHECKED BY	郑建银	产品型号 PRODUCT MODEL	43650-WA
≤ 10 ± 0.2	批准 APPROVED BY	沈才义	红星代号 HONGXING NO	HX30001-WA
≤ 20 ± 0.3	日期 DATE	2019.08.12	版本 VERSION	A
≤ 40 ± 0.4	比例 SCALE	3:1	页码 SHEET	1/1
≤ 80 ± 0.5	视图 VIEW		浙江红星电气有限公司 Zhejiang Hongxing Electrical Co., Ltd.	