

**SPECIFICATIONS:**  
 Current rating:3.0A AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:30m ohm MAX  
 Insulation resistance:5000M ohm MIN  
 Withstanding voltage:1000V AC for one minute  
 Operating temperature range:-40°C~+85°C

**MATERIAL AND FINISH**  
 Insulator:PBT+30%G.F(UL94V-0)  
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated  
 Finish:Metal Iron With Tin Plated

PART NO.:

Z-SUB DB \* M \* 2 \* \* \* \*

NO. OF CONTACTS  
 A=9PIN  
 B=15PIN  
 C=25PIN  
 E=37PIN

LOGO  
 0=NO LOGO  
 2=NEXTRON LOGO

INSULATOR COLOR  
 0=BLACK  
 6=BLUE  
 9=WHITE

INSULATOR MATERIAL  
 0=PBT  
 2=NYLON


CONTACT PLATED:(CONTACT AREA)  
 1=FULL GOLD 1u"  
 7=FULL LIGHT TIN  
 A=GOLD 1u"/LIGHT TIN  
 B=GOLD 3u"/LIGHT TIN  
 C=GOLD 5u"/LIGHT TIN  
 E=GOLD 15u"/LIGHT TIN

CONTACT MATERIAL  
 2=BRASS

MOUNTING OPTIONS  
 1=RIVETED W/ SHIELD ONLY  
 2=RIVETED W/ FRONT RIVET  
 3=RIVETED W/ REAR RIVET  
 4=RIVETED W/ FRONT RIVET REAR RIVET

NUT POST HEIGHT(H)  
 0=5.8mm  
 1=4.8mm

37P	55.42	63.50	69.32	8.38	12.50
25P	38.96	47.04	53.04	8.38	12.50
15P	25.25	33.32	39.14	8.38	12.50
9P	16.92	24.99	30.81	8.38	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				

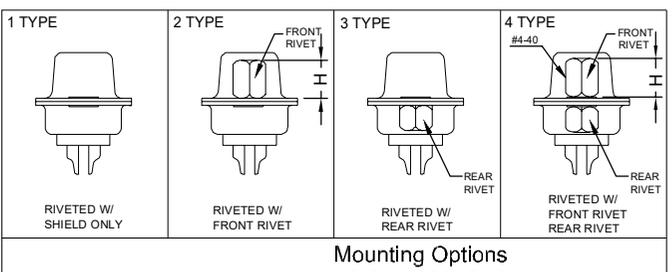

B	ECN-19105	△=1	2019/11/29
A4	ADD LOGO AREA		2017/08/07
REV.	DESCRIPTION		DATE

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB 焊接式 PCB 公端	NEXTRONICS ENGINEERING CORP.		
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBDBXMX2XXXX	TITLE: CUSTOMER DWG		
4 PLACE	± **	mm	APPD: Linson 曾偉雄	2019/12/02	DWG NO: 010-0000-600
3 PLACE	± **	inch	CHKD: Linson 曾偉雄	2019/12/02	
2 PLACE	± 0.20	mm	DRAW:		SCALE SHEET REV. 1/1 1/1 B
1 PLACE	± 0.30	inch	DESIGN: Lu 陳惠枝		
ANGLES	X° ± 3°		2019/11/29		

CONFIDENTIAL: THIS DOCUMENT CONTAINED THE INFORMATION IS PROPRIETARY AND CONFIDENTIAL TO Nexttronics Engineering Corp. NO PERSON IS ALLOWED TO USE COPY, PUBLISH OR OTHERWISE DISCLOSE THE INFORMATION TO OTHERS, UNLESS BY THE PRIOR WRITTEN EXPRESS AUTHORIZATION OF Nexttronics Engineering Corp. (C)COPYRIGHT- Nexttronics Engineering Corp.