

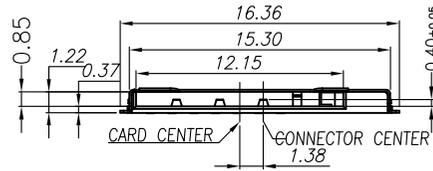
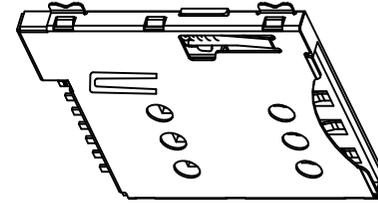
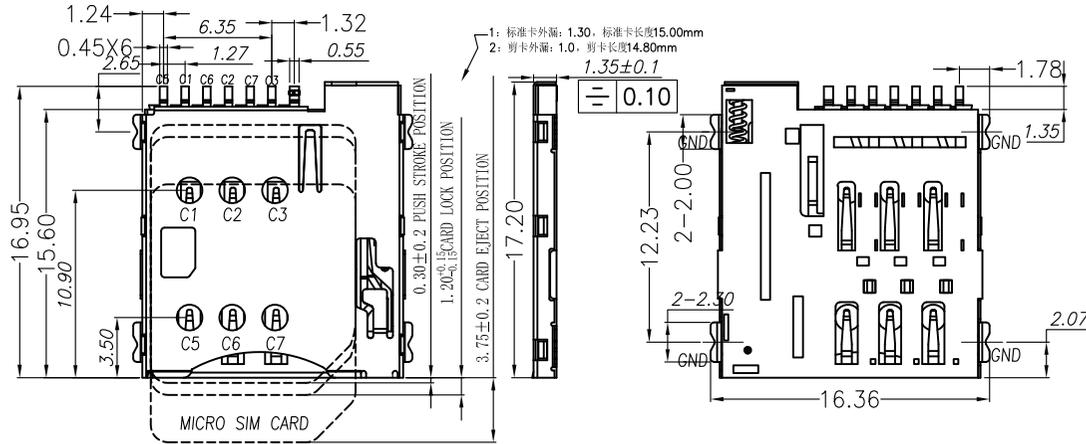
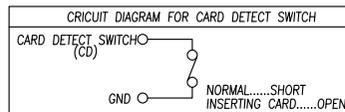


RoHS Compliant

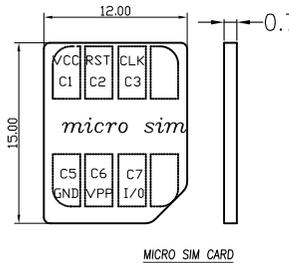

SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

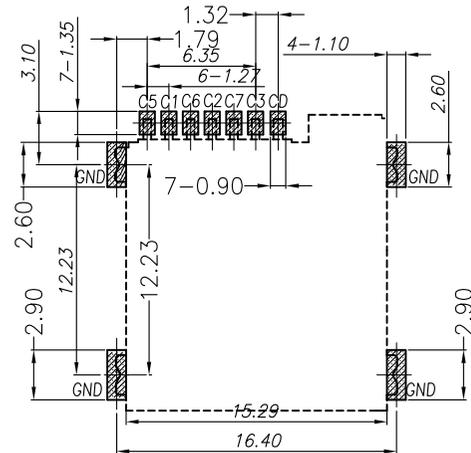

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
 Contact: Copper Alloy
 SHELL: SUS

PLATING:

Contact: Plated 50u' Ni Overall Contact Au 1U
 Shell: Plated 50u' Ni Overall
 Plated 1u'Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-40° C~+85° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m Ω
 Insulation Resistance:1000M min./500V_{DC}
 产品耐温温度: 260
 Mating Cycles:3000Min Insertions

PCB 焊盘区
 下沉部位区
 RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

深圳市敏连达科技有限公司 Shenzhen Minlianda Technology Co.,Ltd.		品名 (ITEM NO)	MICRO SIM PUSH 6+1PIN		
		料号 (PART NO)	MLD-MICRO-7P-H1.35		
单位 (UNIT): MM	未注公差 TOLERANCE UNSPECIFIED	版次 (REV): A/0	页次 (PAGE): 1/1	设计 (DESIGN)	柯南
比例 (SCALE) 1:1	X.X ± 0.38 X.XX ± 0.20 X.XXX ± 0.10 ° ± 5' X' ± 2'	模号 (MODEL NO)	审核 (CHECKED) 邱敏 核准 (APPROVED) 陈镇		
		图号 (DWG NO)			