
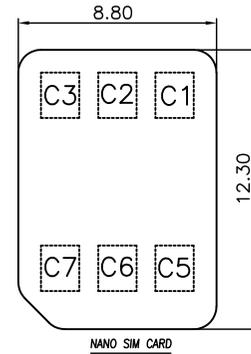
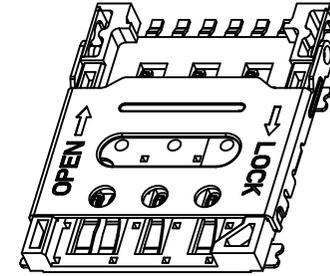
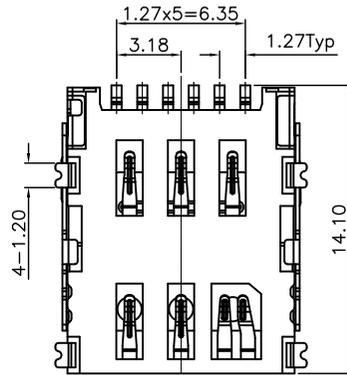




RoHS Compliant

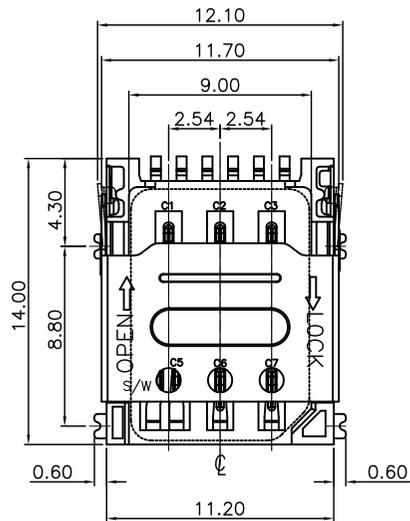


NANO SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

NOTES:


- ELECTRICAL CHARACTERISTICS
  - CONTACT RESISTANCE: 60 Milliohms Max
  - INSULATION RESISTANCE: 1,000 Megohms Min.
  - VOLTAGE RATING: 50V.
  - CURRENT RATING: 1.0A.
- MECHANICAL CHARACTERISTICS
  - OPERATION TEMPERATURE RANGE: -20°C~+85°C
  - DURABILITY: 5000 CYCLES
- MATERIAL:
  - HOUSING: THERMOPLASTIC,UL 94-V0
  - TERMINAL: PHOSPHOR BRONZE,T=0.15
  - SHELL: STAINLESS STEEL,T=0.20
- FINISHED:
  - TERMINAL: Ni PLATED UNDER, 1U" Au MIN PLATED ON CONTACT AREA,AU PLATED ON SOLDER TAIL

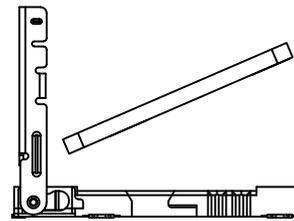



STEP 1 INSERT Micro-SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

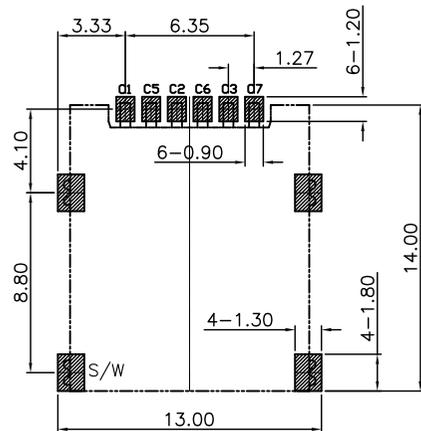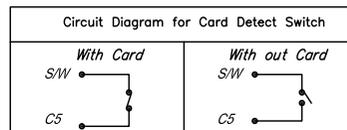

RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05  
■ SMT SOLDER AREA

深圳市敏连达科技有限公司 Shenzhen Minlianda Technology Co.,Ltd.		品名 (ITEM NO)	NANO SIM 6P掀盖 1.4H 带检测PIN		
		料号 (PART NO)	MLD-NANO SIM 7P-H1.4		
单位 (UNIT): MM	未注公差 TOLERANCE UNSPECIFIED	版次 (REV): A/O	页次 (PAGE): 1/1	设计 (DESIGN)	柯南
比例 (SCALE) 1:1	X.X ± 0.38 X.XX ± 0.20 X.XXX ± 0.10 X' ± 5' X.X' ± 2'	模号 (MODEL NO)		审核 (CHECKED)	邱敏
		图号 (DWG NO)	MLD-2509031032	核准 (APPROVED)	陈镇