



RoHs

VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
A		Chen		NEW RELEASE	03/28'20
G	△	Chen		新增规格 △*1	05/23'22



A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

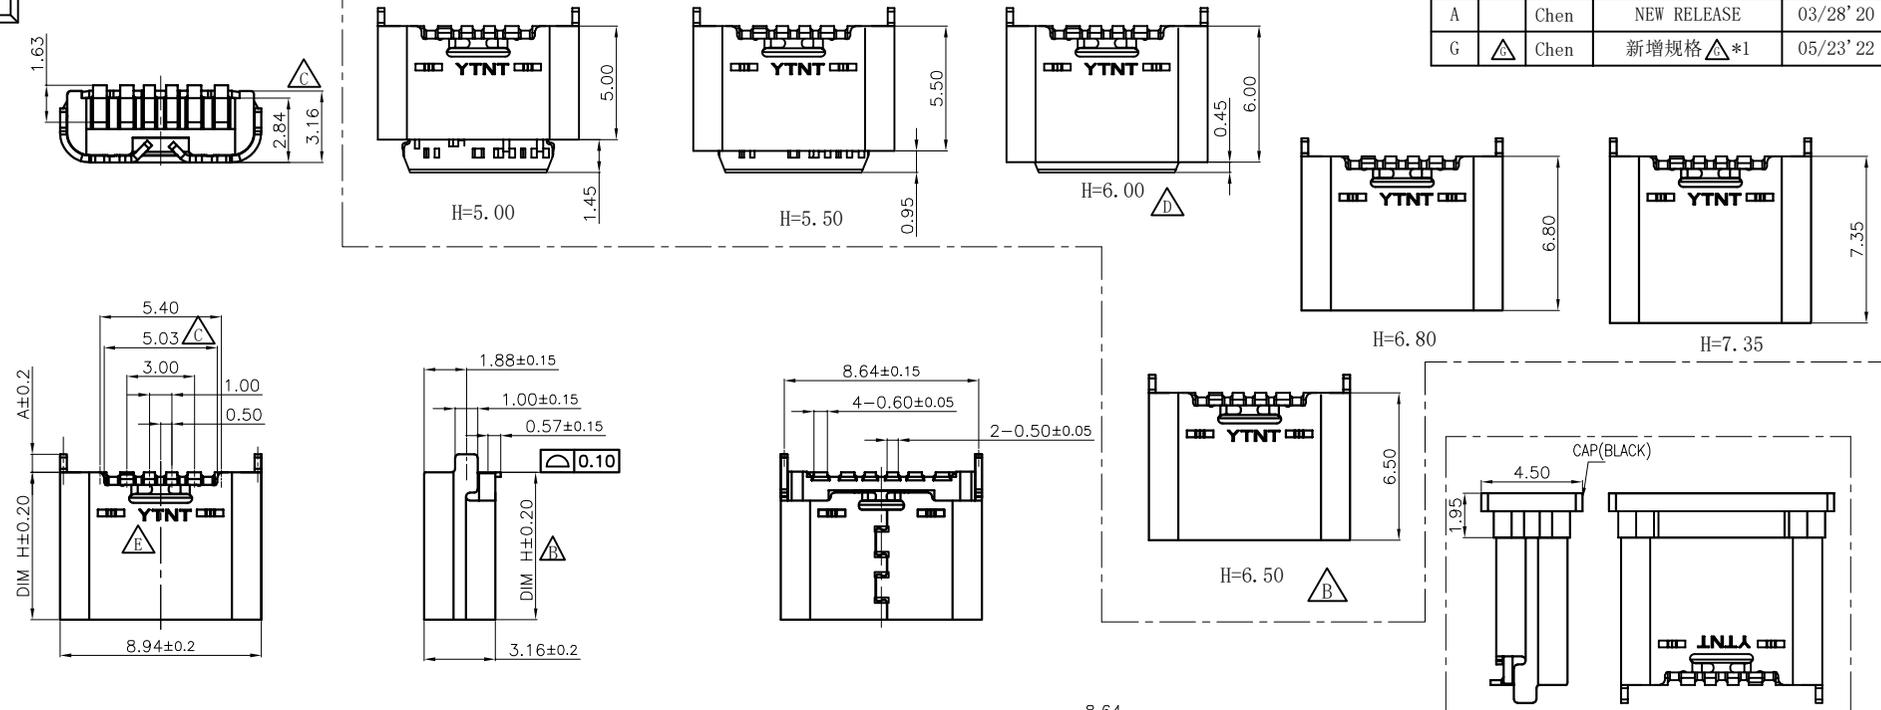


- SPECIFICATION:**
- Material: HOUSING&MOLDING:LCP, UL94 V-0
CONTACTS:C5191R-H
SHELL:SUS, T=0.30
 - Mechanical:
 - Mating force:5~20N;
 - Unmating force:6~20N;
 - Durability:3000 Cycles;
 - Electrical:
 - Current Rating:3A Max.;
 - Voltage Rating:20V Max.;
 - Dielectric Withstanding voltage:100Vac;
 - Contact resistance:40m Ohms Max.;
 - Insulation Resistance:100M Ohms Min.;
 - Environmental:
 - Operating temperature:-40° C~+85° C;
 - Wetting Temperature:265±5° C, 5±0.5s

DIM A	DIM H	G/F(半金穿嘴)	3u"(半金穿嘴)	DESCRIPTION
0.80	7.35	1006-FGB067	1006-FGB068	TPSRPin 7.35H直立全包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
1.30		1006-FGB069	1006-FGB070	
0.80	6.80	1006-FGB063	1006-FGB064	TPSRPin 6.80H直立全包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
1.30		1006-FGB065	1006-FGB066	
△G	0.80	1006-FAW001		TPSRPin 6.80H直立全包平贴, 塑胶 LCP白色, 端子铜脚外表SUS
0.80	6.50	1006-FGB059	1006-FGB060	TPSRPin 6.50H直立全包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
1.30		1006-FGB061	1006-FGB062	
△F	0.80	1006-FGB139		TPSRPin 6.50H直立全包平贴, 塑胶 LCP白色, 端子铜脚外表SUS
△D	0.80	1006-FGB014		TPSRPin 6.00H直立半包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
0.80	5.50	1006-FGB055	1006-FGB056	TPSRPin 5.50H直立全包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
1.30		1006-FGB057	1006-FGB058	
0.80	5.00	1006-FGB051	1006-FGB052	TPSRPin 5.00H直立全包平贴, 塑胶 LCP黑色, 端子铜脚外表SUS
1.30		1006-FGB053	1006-FGB054	

CUSTOMER		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Liang		TITLE: TYPE-C母座 6P 立贴6.5高 LCP 黑色 镀亮镍 长脚0.8		深圳市辉焕科技有限公司	
SIZE	UNITS	X±0.50	X'±5.0'	CHECKED BY: Cao		PART NO.: TYPE-C 6PIN(Y059)			
A4	MM[INCH]	.X±0.35	.X'±3.0'			DWG NO.: TYPE-C 6PIN(Y059)			
SCALE	REV.	.XX±0.25	.XX'±2.5'	DESIGN BY: Li		SHEET			
1:1	G	.XXX±0.15	.XXX'±2.0'			1/1			



VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
A		Chen		NEW RELEASE	03/28' 20
G	△G	Chen		新增规格 △G*1	05/23' 22

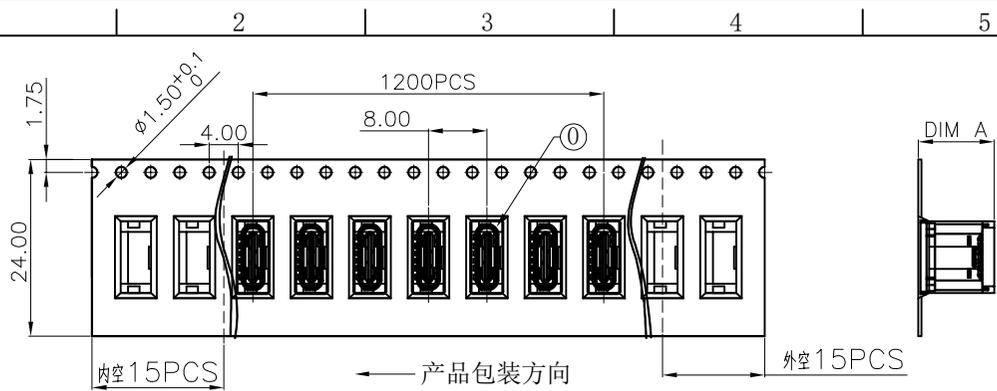

产品高度	DIM A	包装数量/REEL	D	E
7.35	10.35	1200PCS	△D	△E
6.80	10.00	1200PCS	△D	△E
6.50	9.65	1250PCS	△D	△E
6.00	9.15	1250PCS	△D	△E
5.50	8.75	1250PCS	△D	△E
5.00	8.15	1250PCS	△D	△E

成品料号

DIM A	DIM B	DIM C	G/F(半金雾锡)	3u"(半金雾锡)	DESCRIPTION
0.80	7.35	6.10	1006-FGB067	1006-FGB068	TYPE-C 7.35mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
1.30	7.35	6.10	1006-FGB069	1006-FGB070	TYPE-C 7.35mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
0.80	6.80	5.60	1006-FGB063	1006-FGB064	TYPE-C 6.80mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
1.30	6.80	5.60	1006-FGB065	1006-FGB066	TYPE-C 6.80mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
0.80	6.50	5.25	1006-FGB059	1006-FGB060	TYPE-C 6.50mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
1.30	6.50	5.25	1006-FGB061	1006-FGB062	TYPE-C 6.50mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
0.80	5.50	4.25	1006-FGB055	1006-FGB056	TYPE-C 5.50mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
1.30	5.50	4.25	1006-FGB057	1006-FGB058	TYPE-C 5.50mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
0.80	5.00	3.75	1006-FGB051	1006-FGB052	TYPE-C 5.00mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS
1.30	5.00	3.75	1006-FGB053	1006-FGB054	TYPE-C 5.00mm 立式全贴片, 塑胶 LCP黑色, 端子磷铜 外壳SIS

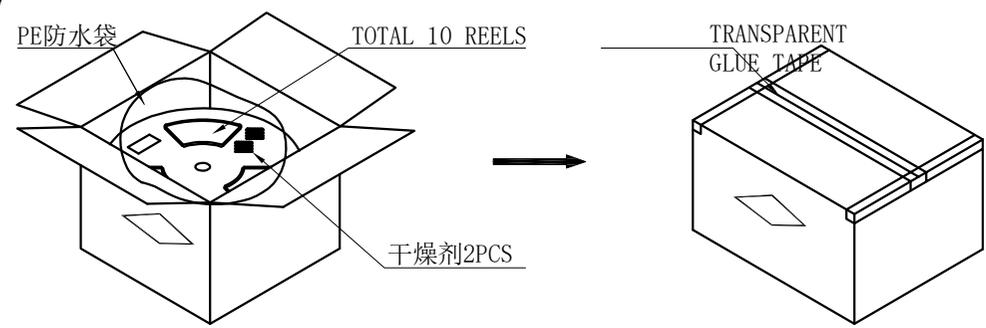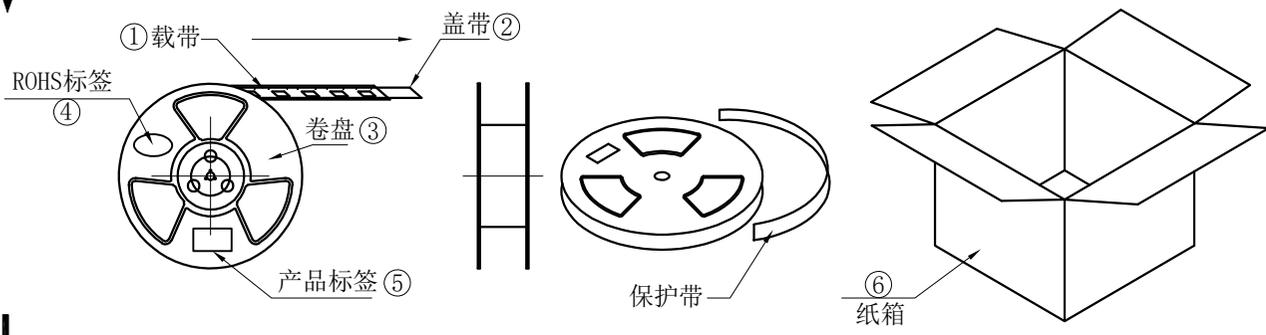

说明:

1. 每卷前后各空15PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每10卷盘一叠共12000Pcs装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高), 不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

NO.	NAME	SPEC	Q' TY
⑥	TYPE C 6P母座成品		12000PCS/箱
①	载带	W=24mm, T=0.40mm	1200PCS/盘
②	盖带	W=21.3mm	
③	卷盘	φ380*100*24.4mm	10PCS/箱
④	ROHS标签		10PCS/箱
⑤	产品标签		10PCS/箱
⑥	纸箱	390*390*310mm	12000PCS/箱

PACKAGING		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Li ang	TITLE: TYPE-C母座 6P 立贴6.5高 LCP 黑色 镀亮镍 长脚0.8	深圳市辉焕科技有限公司
SIZE A4	UNITS MM[INCH]	X±1.0 .X±0.50	X'±5.0 .X'±3.5'	CHECKED BY: Cao	PART NO.: TYPE-C 6PIN(Y059)	
SCALE 1:1	REV. G	.XX±0.30 .XXX±0.15	.XX'±2.5' .XXX'±1.5'	DESIGN BY: Li	DWG NO.: TYPE-C 6PIN(Y059)	
				SHEET 1/1		