

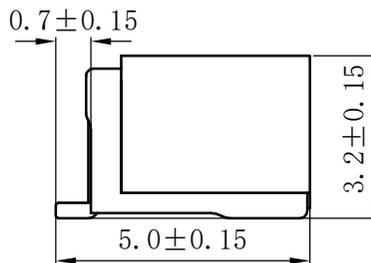


1 2 3 4 5 6



A

A

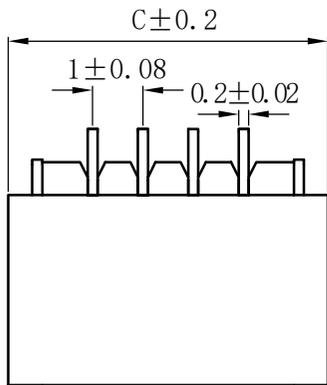

B

B

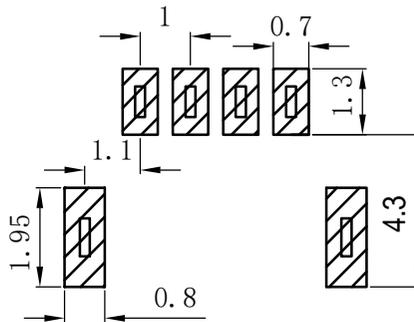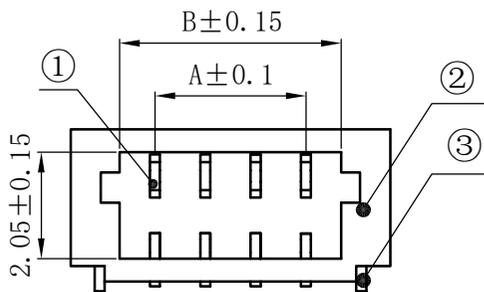

P.C.B LAYOUT

SH1.0mm贴片	A-(mm)	B-(mm)	C-(mm)
SH1.0mm-2P-WT	1.0	2.6	4.4
SH1.0mm-3P-WT	2.0	3.6	5.4
SH1.0mm-4P-WT	3.0	4.6	6.4
SH1.0mm-5P-WT	4.0	5.6	7.4
SH1.0mm-6P-WT	5.0	6.6	8.4
SH1.0mm-7P-WT	6.0	7.6	9.4
SH1.0mm-8P-WT	7.0	8.6	10.4
SH1.0mm-9P-WT	8.0	9.6	11.4
SH1.0mm-10P-WT	9.0	10.6	12.4
SH1.0mm-11P-WT	10.0	11.6	13.4
SH1.0mm-12P-WT	11.0	12.6	14.4
SH1.0mm-13P-WT	12.0	13.6	15.4
SH1.0mm-14P-WT	13.0	14.6	16.4
SH1.0mm-15P-WT	14.0	15.6	17.4
SH1.0mm-16P-WT	15.0	16.6	18.4

C

C

技术要求

1: 外观要求

- 1-1. 插针表面光洁、无损伤、锈蚀等缺陷。
- 1-2. 基座表面无脏污、飞边、排气不良等缺陷。

2: 电气性能:

- 2-1. 额度电流: 1.0A
- 2-2. 额定电压: 50V
- 2-3. 耐电压: 500V
- 2-4. 接触电阻: $\leq 20m\Omega$
- 2-5. 绝缘电阻: $\geq 100m\Omega$

3: 工作温度: $-25^{\circ}C \sim +85^{\circ}C$

D

D

>20	± 0.25	序号	材料名称	数量	材质	镀涂	REMARK
>10 \leq 20	± 0.2	①	卧贴针	n	磷铜	高温亮锡	GP PASS
>3 \leq 10	± 0.15	②	塑件	1	LCP	/	GP PASS
3 \leq	± 0.1	③	焊片	2	磷铜	高温亮锡	GP PASS
尺寸范围	公差						
设计		产品名称		SH1.0mm-4P-卧贴			
审核		 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD					
批准							
单位: mm							

1 2 3 4 5 6