
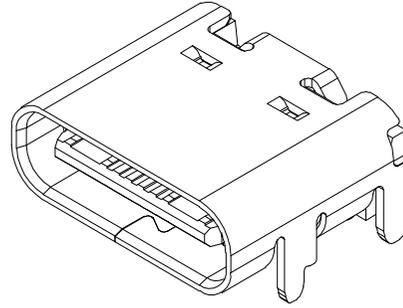


由 Autodesk 教育版产品制作

RoHS

REV.	MODIFICATION	APP.	DATE
------	--------------	------	------

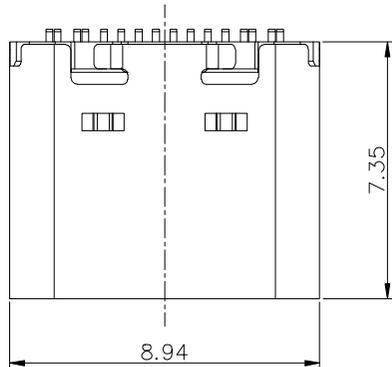




规格说明:

1. 材质:



- 1.1 胶芯: LCP+30%G.F UL94V-0
- 1.2 端子: C2680, T=0.15mm; 镍底80μ", 镀金G/F
- 1.3 卡钩钢片: SUS201, T=0.15mm; 清洗
- 1.4 外壳: SUS201, T=0.30mm; 表面镀镍80μ"

2. 主要特性:

- 2.1 额定电流: 3.0A
- 2.2 接触阻抗: 40mΩ MAX
- 2.3 绝缘阻抗: 100MΩ MIN 250V DC
- 2.4 耐压测试: 100V AC
- 2.5 沾锡性: 温度250±5℃, 时间5±0.5s
- 2.6 整体插入力: 2.0kgf MAX
整体拔出力: 0.6kgf MIN
- 2.7 使用寿命: 10000次
- 2.8 工作温度: -30℃~+80℃

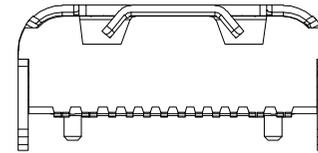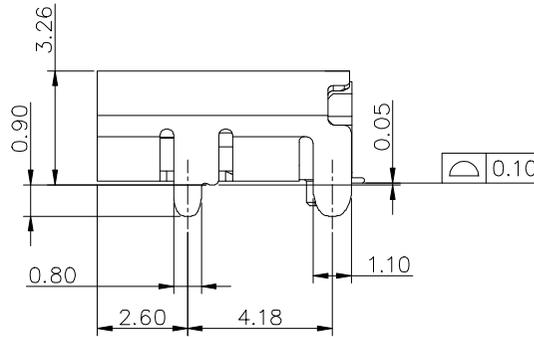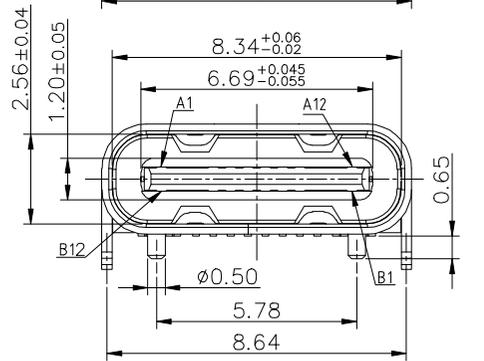

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

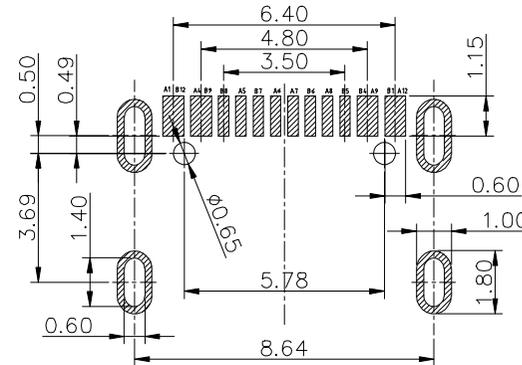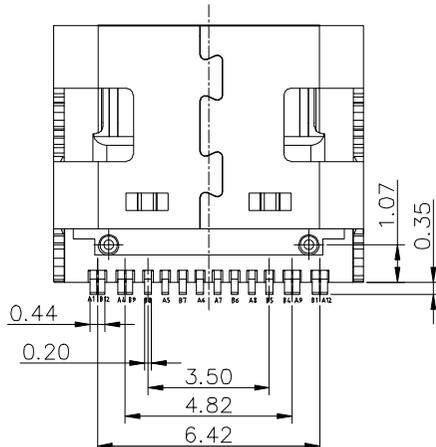

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD		Title: USB TYPE-C 母头 16Pin 7.35 SMT-TYPE SHELL DIP	
		Units <input checked="" type="checkbox"/> mm <input type="checkbox"/> inch	Part no: TYPE-C16P0010-01
Tolerances Linear: x ±0.30, .xx ±0.15, .xxx ±0.10 Angles: x° ±5°, x' ±2°, .xxx ±1°	App. Chk. Dr. Date.	Scale 1:1	Sheet 1/1

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作