
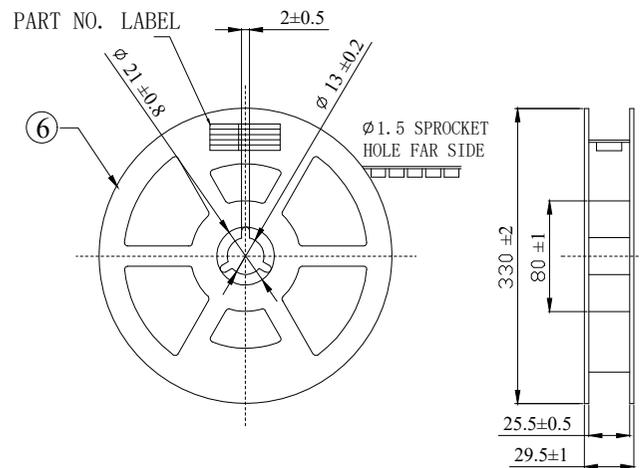
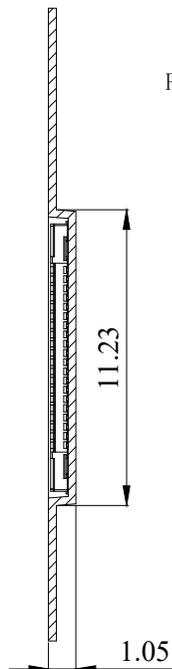


- NOTES:
- 1.0 VOLTAGE: 30V AC/DC
  - 2.0 CURRENT: 0.3A/SIGNAL CONTACT, 4A/POWER CONTACT
  - 3.0 OPERATION TEMPERATURE: -35° C TO 85° C
  - 4.0 CONTACT RESISTANCE: 50mΩ /SIGNAL CONTACT, 30mΩ /POWER CONTACT
  - 5.0 INSULATION RESISTANCE: 50MΩ MIN INITIAL
  - 6.0 DIELECTIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE
  - 7.0 DURABILITY:30 CYCLES
  - 8.0 IR REFLOW CYCLE: 2 CYCLES MAX.

3	POWER CONTACT	COPPER ALLOY, GOLD PLATING OVER NICKEL	6	REEL	PLASTIC
2	SIGNAL CONTACT	COPPER ALLOY, GOLD PLATING OVER NICKEL	5	COVER TAPE	PLIYESTER
1	HOUSING	LCP, BLACK, UL 94 V-0	4	EMBOSSED CARRIER TAPE	PS
NO.	PART NAME	DESCRIPTION , REMARKS	NO.	PART NAME	DESCRIPTION , REMARKS

**深圳市华宇创精密电子有限公司**


<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	<b>DRAWN BY :</b> 陈一鸣	<b>DATE :</b> 2014-02-23	<b>PART NAME:</b> 0.35PH 单槽BTB 母座 40P
	<b>CHECKED BY:</b> 马跃	<b>DATE :</b> 2014-02-23	<b>PART NO.:</b> HYCW63F-BTB2X20-065B
<b>UNIT:</b> mm [inch] <b>SCALE:</b> 1:1 <b>SIZE:</b> A4	<b>APPROVED BY:</b> 邱敏	<b>DATE :</b> 2014-02-23	<b>DRAW NO.:</b> HYC-2511201655
			<b>SHEET NO.:</b> 1 OF 1

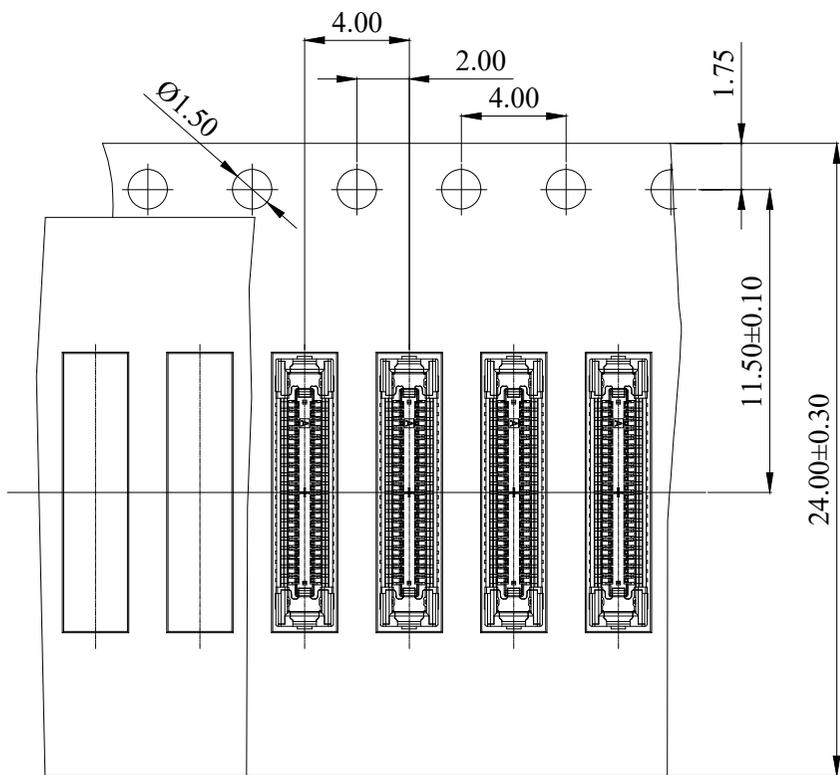

STYLE AND DIMENSION OF REEL

PER REEL 15000 CONNECTORS

DIRECTION OF UNREELING

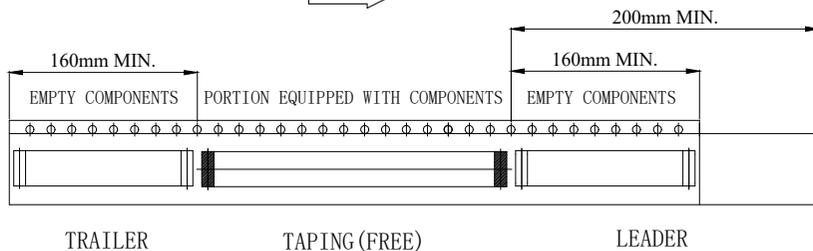

深圳市华宇创精密电子有限公司

<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	<b>DRAWN BY :</b> 陈一鸣	<b>DATE :</b> 2014-02-23	<b>PART NAME:</b> 包装图	
	<b>CHECKED BY:</b> 马跃	<b>DATE :</b> 2014-02-23	<b>PART NO.</b>	
<b>UNIT:</b> mm [inch] <b>SCALE:</b> 1:1 <b>SIZE:</b> A4	<b>APPROVED BY:</b> 邱敏	<b>DATE :</b> 2014-02-23	<b>DRAW NO:</b>	
			<b>SHEET NO.</b>	1 OF 1