


RoHS

REV.	ECN.#	DESCRIPTION	NAME	DATE
A0		NEW RELEASE	liuhongping	2023.01.02

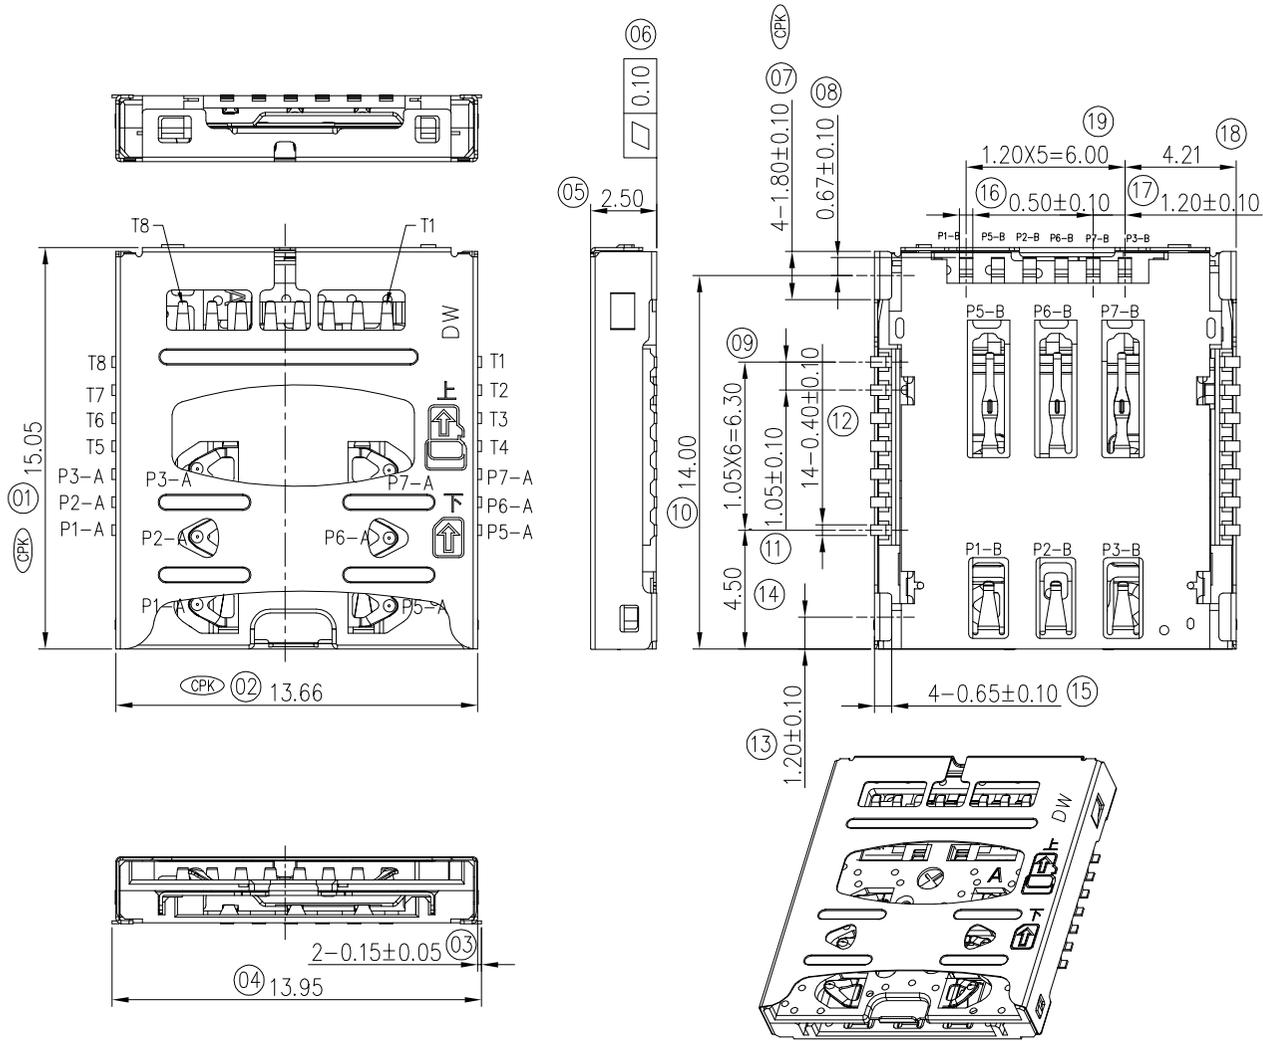

NOTES:

- MATERIAL:
  - HOUSING: LCP UL94V-0; COLOR: BLACK
  - TERMINAL: C5210
  - SHELL: SUS304
  - TRAY: SUS304
- FINISH:
  - TERMINAL: Au 1u" PLATED ON CONTACT AREA; Au 1u" PLATED ON SOLDER AREA; Ni 30u" MIN. UNDERPLATED OVERALL.
  - SHELL: Au 1u" PLATED ON SOLDER AREA; Ni 30u" MIN. UNDERPLATED OVERALL.
- ELECTRICAL SPECIFICATION:
  - RATED CURRENT: 1.0A
  - CONTACT RESISTANCE: 100mΩ MAX.
  - INSULATION RESISTANCE: 100MΩ MIN.
  - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC .
- MACHINERY SPECIFICATION:
  - MATING FORCE: 1N-10N. UNMATING FORCE: 1N-10N.
  - DURABILITY: 3000 CYCLES.
- ENVIRONMENTAL SPECIFICATION:
  - OPERATING CONDITION: TEMPERATURE -40°C~+85°C; HUMIDITY 80% R.H MAX
  - SALT SPRAY: 24H.
- SOLDER ABILITY: 245±5°C, 5±0.5s
- IR REFLOW: THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

T-CARD P/N	PIN NAME
T1	DAT2
T2	CD/DAT3
T3	CMD
T4	VDD
T5	CLK
T6	VSS
T7	DAT0
T8	DAT1

NANO SIM P/N	PIN NAME
P1 A/B	VCC
P2 A/B	RST
P3 A/B	CLK
P5 A/B	GND
P6 A/B	VPP
P7 A/B	I/O


MILLIMETERS	INCH
X.* ±2*	X.* ±2*
X ±0.30	.X ±0.012
XX ±0.20	.XX ±0.008
XXX ±0.10	.XXX ±0.004

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd  
 COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd





**JBL** 东莞市金比莱五金塑胶科技有限公司  
**DONGGUAN JBL TECH CO., LTD**

TITLE	三选二双NANO+T卡座H2.5	DR		
PART NO.	102312862	CHKD		
PRO J.	PAGE 1/3	UNITS mm	APPD	
SIZE	A4	SCALE 1:1	DIS NO.	

RoHS

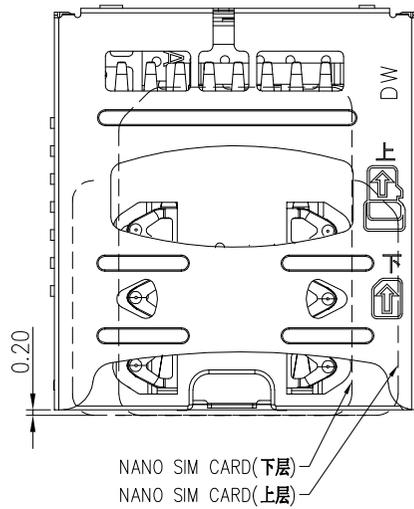


OR

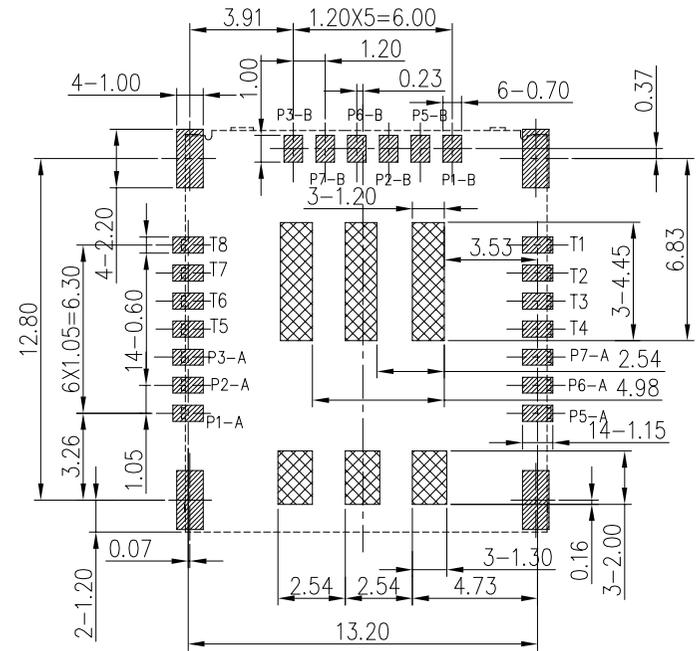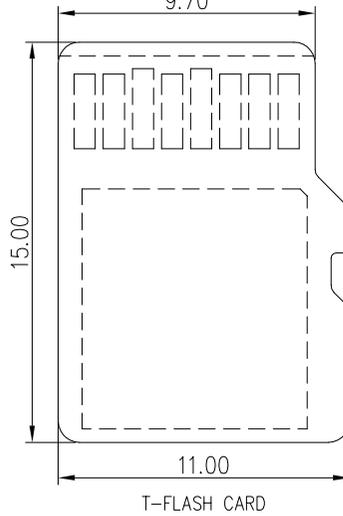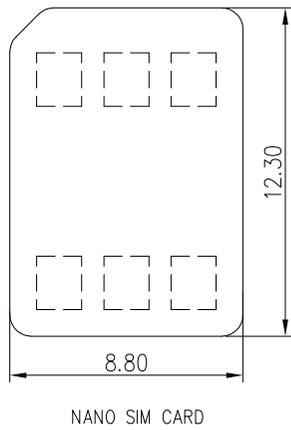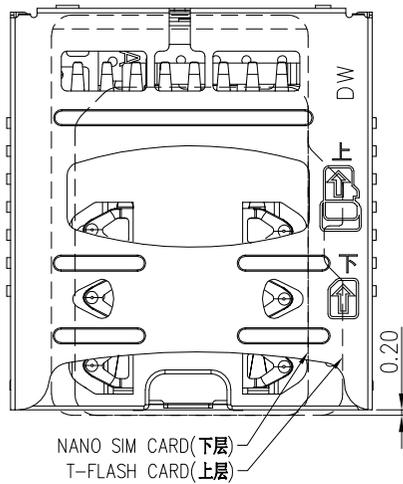

MILLIMETERS	INCH	东莞市金比莱五金塑胶科技有限公司 DONGGUAN JBL TECH CO., LTD																							
X.* $\pm 2^*$	X.* $\pm 2^*$	<table border="1"> <tr> <td>TITLE</td> <td>三选二双NANO+T卡座H2.5</td> <td>DR</td> <td></td> <td></td> </tr> <tr> <td>PART NO.</td> <td>102312862</td> <td>CHKD</td> <td></td> <td></td> </tr> <tr> <td>PRO J.</td> <td>PAGE 2/3</td> <td>UNITS mm</td> <td>APPD</td> <td></td> </tr> <tr> <td>SIZE</td> <td>A4</td> <td>SCALE 1:1</td> <td>DIS NO.</td> <td></td> </tr> </table>				TITLE	三选二双NANO+T卡座H2.5	DR			PART NO.	102312862	CHKD			PRO J.	PAGE 2/3	UNITS mm	APPD		SIZE	A4	SCALE 1:1	DIS NO.	
TITLE	三选二双NANO+T卡座H2.5					DR																			
PART NO.	102312862					CHKD																			
PRO J.	PAGE 2/3					UNITS mm	APPD																		
SIZE	A4	SCALE 1:1	DIS NO.																						
X $\pm 0.30$	.X $\pm 0.012$																								
XX $\pm 0.20$	.XX $\pm 0.008$																								
XXX $\pm 0.10$	.XXX $\pm 0.004$																								
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co.,Ltd</small>																									


RoHS

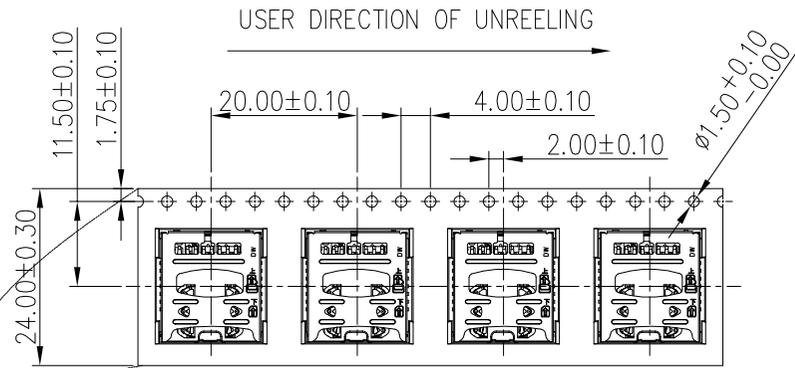



COVER TAPE PEELING ANGLE: 165°~180°  
PEELING FORCE: 20~130g

CARRIER TAPE

USER DIRECTION OF UNREELING

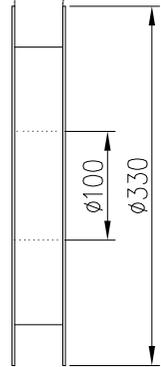


DETAIL B

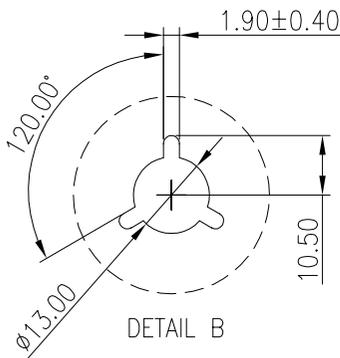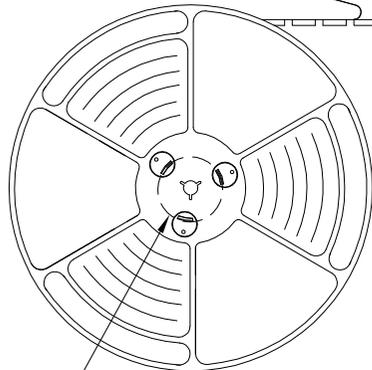


NOTES

1. NUMBER OF CONNECTORS: 1000PCS/REEL
2. LEAD TAPE LENGTH

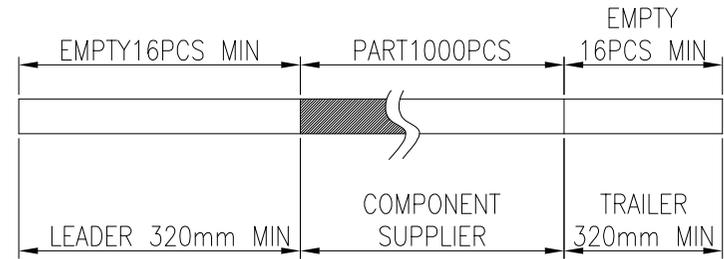

3. QUANTITY: 12000PCS/CARTON

CARTON  
340\*340\*352 K=K

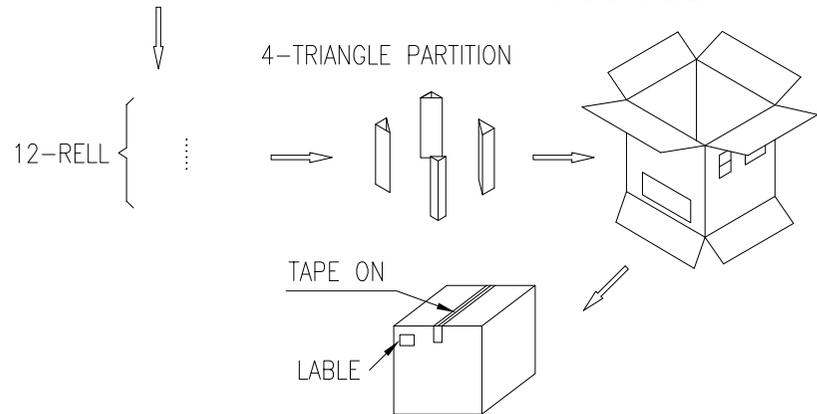

MILLIMETERS	INCH
X.* ±2*	X.* ±2*
X ±0.30	.X ±0.012
XX ±0.20	.XX ±0.008
XXX ±0.10	.XXX ±0.004

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd  
COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBilai Metal Plastic Technology Co.,Ltd



东莞市金比莱五金塑胶科技有限公司  
DONGGUAN JBL TECH CO., LTD

TITLE	三选二双NANO+T卡座H2.5			DR	
PART NO.	102312862			CHKD	
PRO J.	PAGE	3/3	UNITS	mm	APPD
SIZE	A4	SCALE	1:1	DIS NO.	