

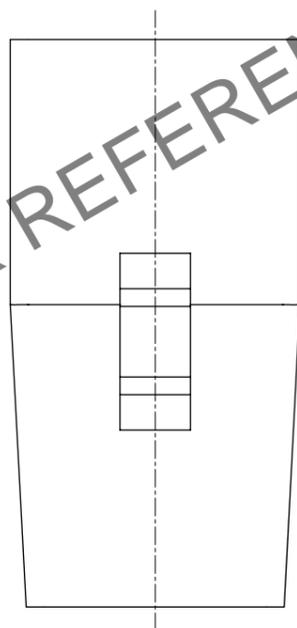
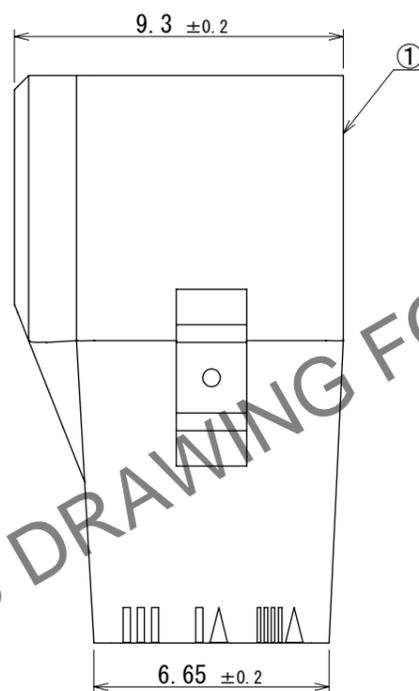
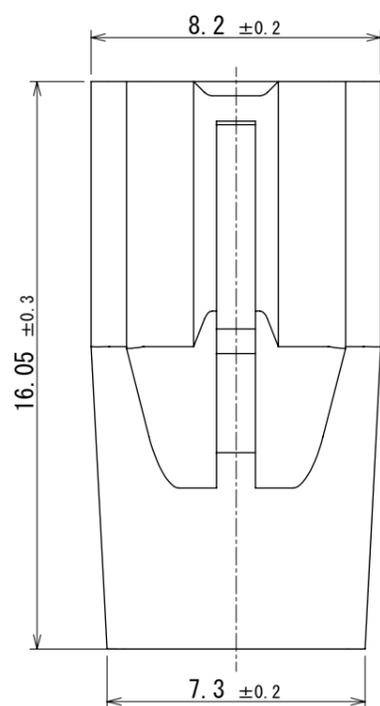
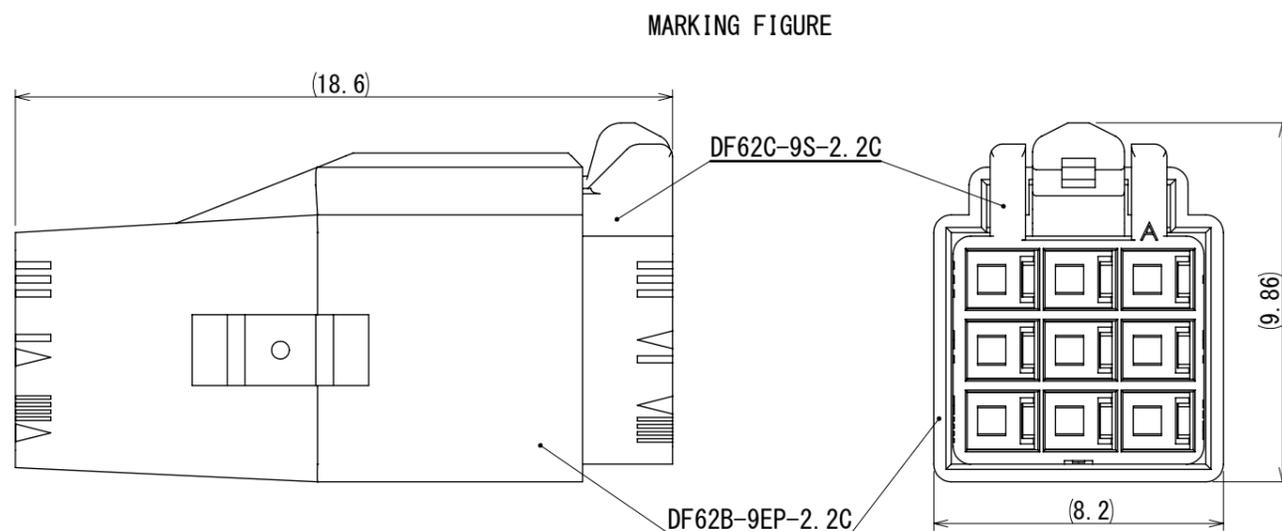


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

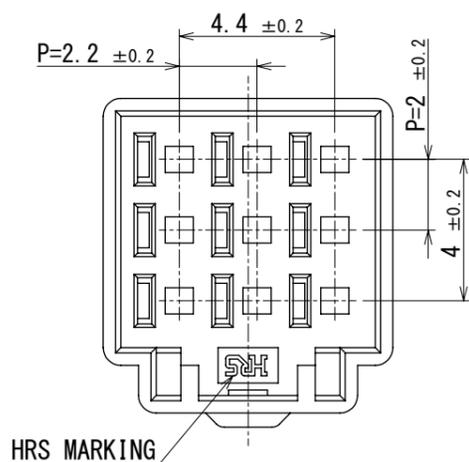


◇ FIGURE-1 CONTACT No. MARKING (10:1)

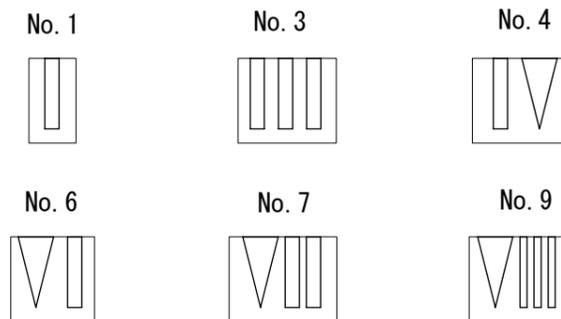

HRS DRAWING FOR REFERENCE

- 注 ① MARKING AT THE INDICATED POSITIONS ARE CONTACT No. MARKING. AND SHAPES ARE SHOWN IN FIGURE-1.
- PER PACK : 100 PIECES.
 - THE DIMENSIONS IN PARENTHESIS ARE FOR REFERENCE.
 - PLEASE REFER TO THE TECHNICAL SPECIFICATION (ATAP-H0849-00) FOR THE PACKING TYPE.
 - PLEASE REFER TO THE TECHNICAL SPECIFICATION (ETAD-H0599-00, ETAD-H0593-00) FOR HANDLING.
 - UL (FILE No. E52653)、C-UL (FILE No. E52653) AUTHORIZATION ARTICLE.

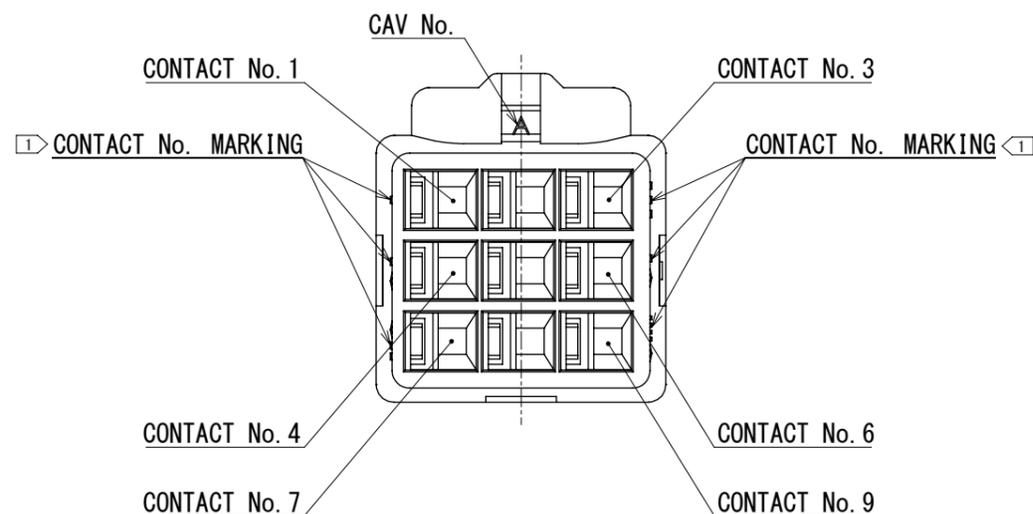

NO.		MATERIAL		FINISH		REMARKS	
1		PBT		UL94V-0 (BLACK)			
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS	
mm		5:1		△		DESIGNED	
APPROVED		S.J. OKAMURA		2024.08.14		DRAWING NO.	
CHECKED		SZ. ONO		2024.08.14		PART NO.	
DESIGNED		RI. GENDA		2024.08.14		CODE NO.	
DRAWN		RI. GENDA		2024.08.14		CL0544-0623-0-00	
HRS		HIROSE ELECTRIC CO., LTD.				EDC-406409-00-00	
						DF62B-9EP-2.2C	
						1/1	