
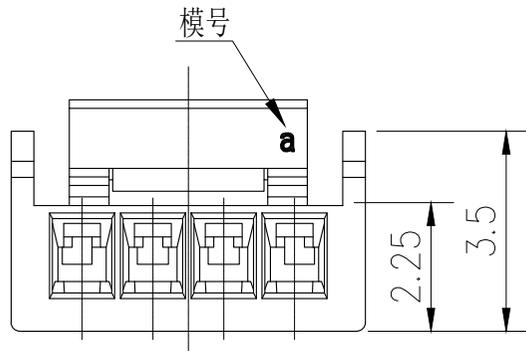
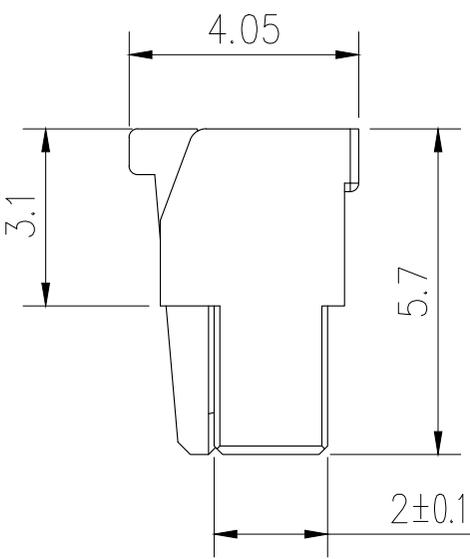
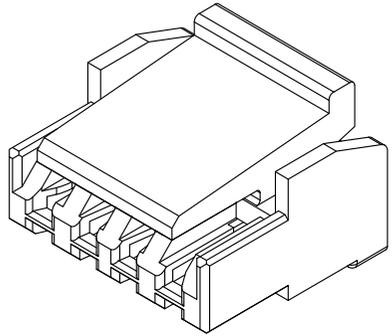


标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

No. of Contacts	DIM A	DIM B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00
16	18.75	21.25

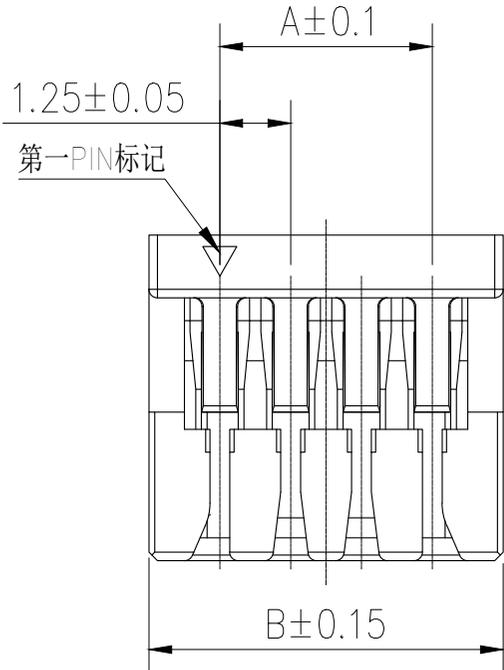

技术要求:

- 额定电流: 1.0A AC,DC
(注: AWG32# 0.8)
- 额定电压: 50V AC
- 温度范围: -25°C~85°C
- 接触电阻: ≤0.02Ω
- 绝缘电阻: ≥100MΩ
- 耐 压: 500V AC/min
- 材 料: PA66, 白色

1	胶壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司	品名 TITLE	胶壳	
		料号 PART NO	HC-GH1.25-3Y-L	

GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1		
X.±0.30	X.±5°	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.25	.X±3°	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.20	.XX±1°	版本 REV	A	批准 APPROVE	赵亮亮

