

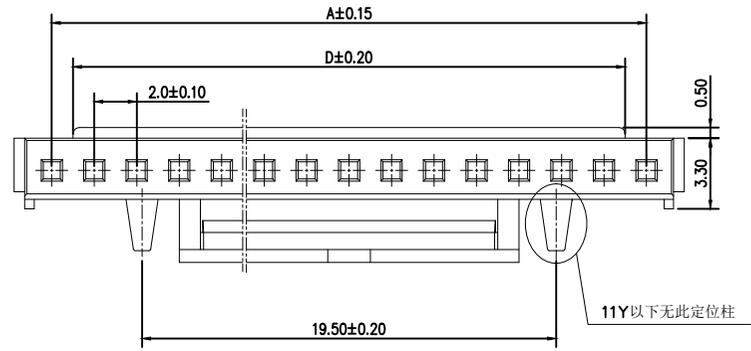



标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

芯数	A	B	C	D
2	2.00	4.55	3.30	2.00
3	4.00	6.55	3.30	3.00
4	6.00	8.55	4.75	4.00
5	8.00	10.55	6.75	6.00
6	10.00	12.55	8.00	8.00
7	12.00	14.55	10.00	10.00
8	14.00	16.55	12.00	12.00
9	16.00	18.55	14.00	14.00
10	18.00	20.55	16.00	16.00
11	20.00	22.55	16.00	18.00
12	22.00	24.55	16.00	20.00
13	24.00	26.55	16.00	22.00
14	26.00	28.55	16.00	24.00
15	28.00	30.55	16.00	26.00
16	30.00	32.55	16.00	28.00

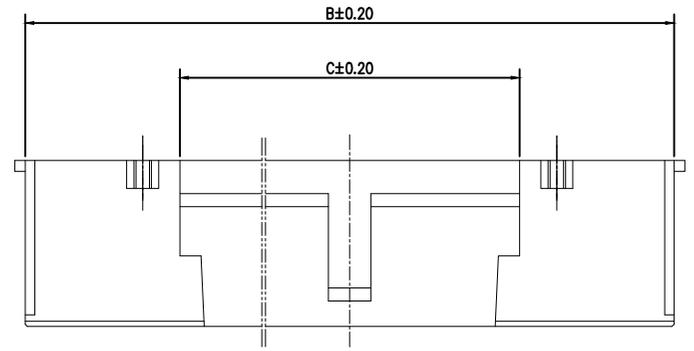

技术要求:

- 额定电流: 2.0A AC,DC
- 额定电压: 250V AC, DC
- 温度范围: -25°C~85°C
- 接触电阻: ≤0.01Ω
- 绝缘电阻: ≥1000MΩ
- 耐压: 800V/min
- 材料: PA66, 白色

说明: 仅2Y、3Y、4Y、5Y的品名为2YL、3YL、4YL、5YL

1	胶壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	胶壳
			料号 PART NO	HC-HY2. 0-5Y-L

GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1		
X.±0.30	X.±5°	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.25	.X±3°	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.20	.XX±1°	版本 REV	A	批准 APPROVE	赵亮亮

