



12-24 CONTACTS

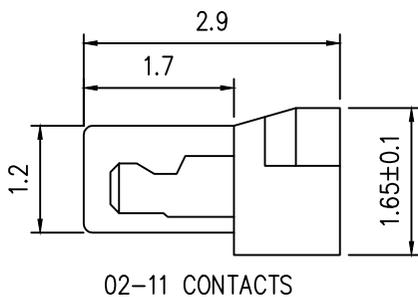

02-11 CONTACTS

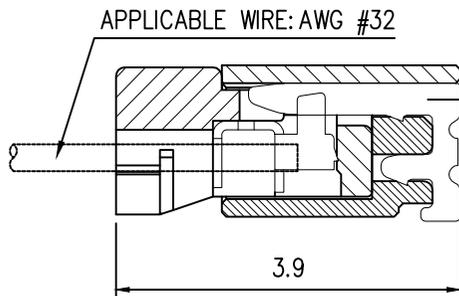

MATED CONDITION

7	8	9
标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE
		日期 DATE
		核准 APPROVE

PIN	尺寸 (mm)		
	A	B	C
02	0.80	1.78	2.40
03	1.60	2.58	3.20
04	2.40	3.38	4.00
05	3.20	4.18	4.80
06	4.00	4.98	5.60
07	4.80	5.78	6.40
08	5.60	6.58	7.20
09	6.40	7.38	8.00
10	7.20	8.18	8.80

技术要求:

额定电流: 0.7A AC,DC

额定电压: 30V AC

温度范围: -40° C~+85° C

接触电阻: ≤0.03 Ω

绝缘电阻: ≥100M Ω

耐 压: 200V AC/min

适用电线: AWG#32

绝缘层直径: $\phi 0.38 \pm 0.02$ mm

2	端子	铜	镀金	
1	胶壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	胶壳+端子
			料号 PART NO	HC-SUR0. 8-4YD

GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1		
X.±0.30	X.±5°	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.25	.X±3°	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.20	.XX±1°	版本 REV	A	批准 APPROVE	赵亮亮

