
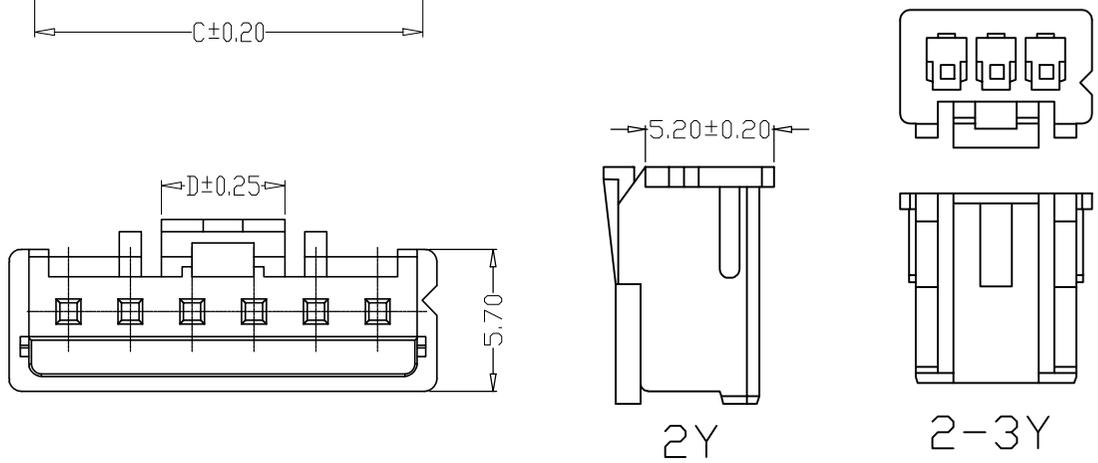
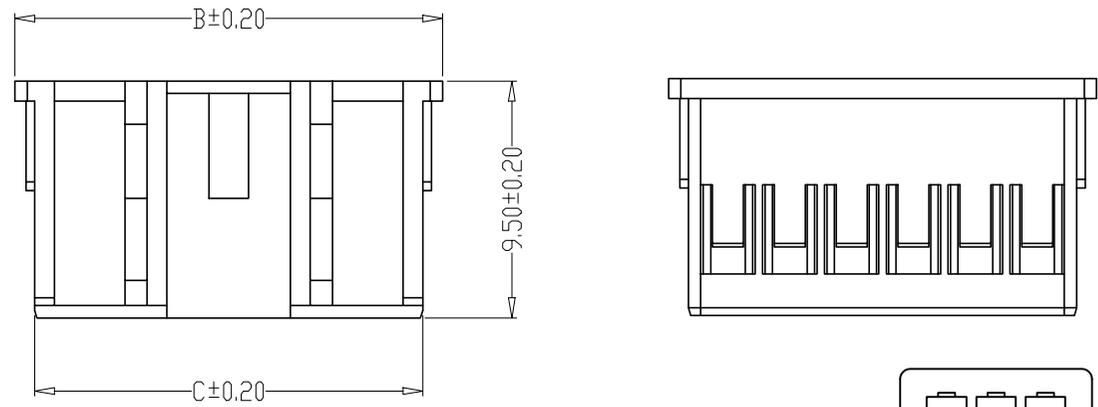


7	8	9
标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE
		日期 DATE
		核准 APPROVE

Pin	DIM A	DIM B	DIM C	DIM D
2	2.50	7.20	5.70	3.00
3	5.00	9.70	8.20	4.40
4	7.50	12.20	10.70	4.80
5	10.00	14.70	13.20	4.80
6	12.50	17.20	15.70	4.80
7	15.00	19.70	18.20	4.80
8	17.50	22.20	20.70	4.80
9	20.00	24.70	23.20	4.80
10	22.50	27.20	25.70	4.80
11	25.00	29.70	28.20	4.80
12	27.50	32.20	30.70	4.80
13	30.00	34.70	33.20	4.80
14	32.50	37.20	35.70	4.80
15	35.00	39.70	38.20	4.80
16	37.50	42.20	40.70	4.80

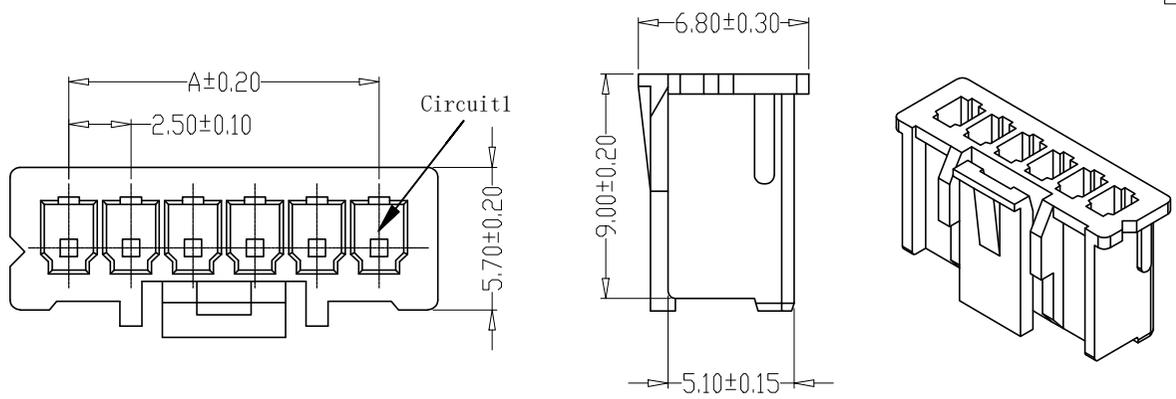

SPECIFICATIONS

1. Current Rating: 3A AC, DC
2. Voltage Rating: 250V AC, DC
3. Temperature Range: -25°C~+85°C
4. Contact Resistance: 20mΩ Max
5. Insulation Resistance: 1000MΩ Min
6. Withstanding Voltage: 1000V AC/minute
7. Material: Wafer PA66
PIN Brass Tin-plated

1	外壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注
品名 TITLE		胶壳		
料号 PART NO		HC-XA2.54-4Y		
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1	
X±0.25	X'±2'	单位 UNIT	MM	制图 DRAW
.X±0.25	.X'±1'	张数 PART NO	1 OF 1	审核 CHECKED
.XX±0.15	.XX'±0.5'	版本 REV	A	批准 APPROVE
.XXX±0.10	.XXX'±0.5'	夏操云 赵亮亮		

