

标记  
MARK




ECN编号/变更内容  
ECN NO/DEFINITION

修改  
REVISE


日期  
DATE

核准  
APPROVE




No. of Contacts	DIM A	DIM B	DIM C
2	2.5	5.7	3.0
3	5.0	8.2	4.0
4	7.5	10.7	5.0
5	10.0	13.2	7.5
6	12.5	15.7	10.0
7	15.0	18.2	12.5
8	17.5	20.7	12.5
9	20.0	23.2	12.5
10	22.5	25.7	12.5
11	25.0	28.2	12.5
12	27.5	30.7	12.5
13	30.0	33.2	12.5
14	32.5	35.7	12.5
15	35.0	38.2	12.5
16	37.5	40.7	12.5

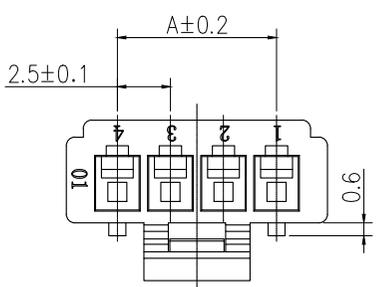

2PIN



3PIN

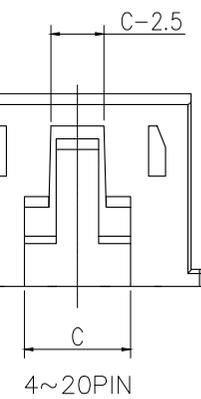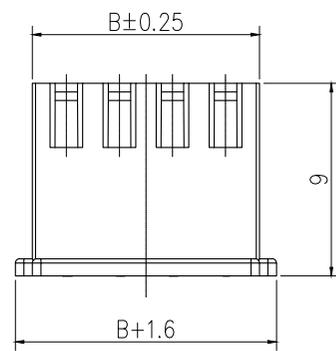

4~20PIN

技术要求:

- 额定电流: 3.0A AC,DC
- 额定电压: 250V AC,DC
- 温度范围: -25°C~85°C
- 接触电阻: ≤0.01Ω
- 绝缘电阻: ≥1000MΩ
- 耐压: 1000V/min
- 材料: PA66, 白色

1	胶壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注



深圳市虹成电子有限公司

品名 TITLE	胶壳
料号 PART NO	HC-XHB2. 54-9Y-L

GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1		
X.±0.30	X.±5°	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.25	.X±3°	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.20	.XX±1°	版本 REV	A	批准 APPROVE	赵亮亮

