
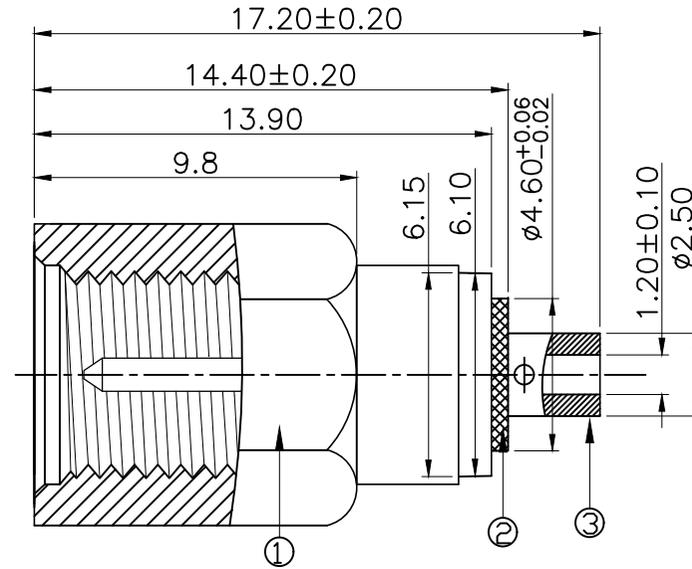


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			The first edition released	2016.11.25	SQL

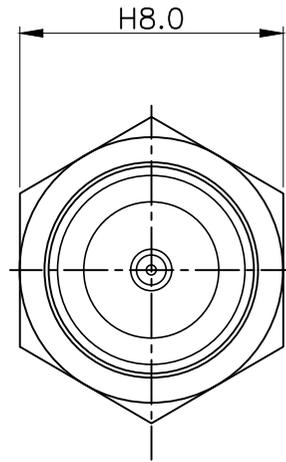

备注:

1. 表面不可有氧化、破损、刮伤等不良
2. 組裝后螺牙本體8KGf拉拔不可鬆動, 3KGf扭力不可旋轉.
3. 標有( )的為重點檢驗項目

3	中心PIN	OD2.5 *L15.70, 青铜C3602 镀金	1
2	绝缘体	PTFE 白色	1
1	螺牙本體	H8.00*17.20, 青铜C3604 镀金	1
NO	ITLM	DESCRIPTION	Q'TY
<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>			
* NO USING RESTRICTED AND BANNED SUBSTANCE			

DIM	TOL	DIM	TOL
X.	±0.20	X'	±4.0°
X.X	±0.15	X.X°	±3.0°
X.XX	±0.05	X.XX°	±2.0°
X.XXX	±0.005	X.XXX°	±1.0°

HJ-Tech		东莞市皇捷通讯科技有限公司		
DRAW NO.		DATE	DRAW NAME: SMA PLUG FOR RG59 (防水)	
DESIGN:	SQL	2016.11.25	FILE:	P/N NO. 2LC15PM016
CHECK:			MODEL:	UNIT: mm SHEET: N/A
APPROVED:			REV. A0	SCALE N/A