

标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

A

A

B

B

C

C

D

D

E



E

F



F

G

G

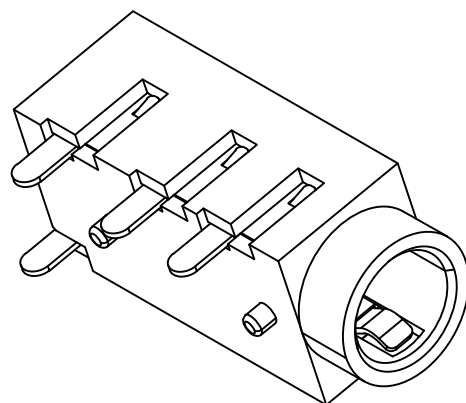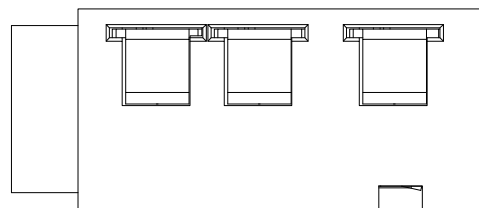




3D VIEW

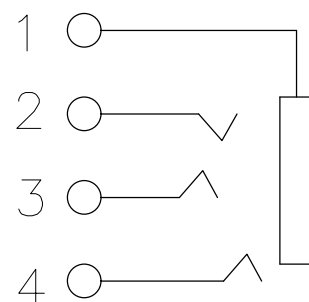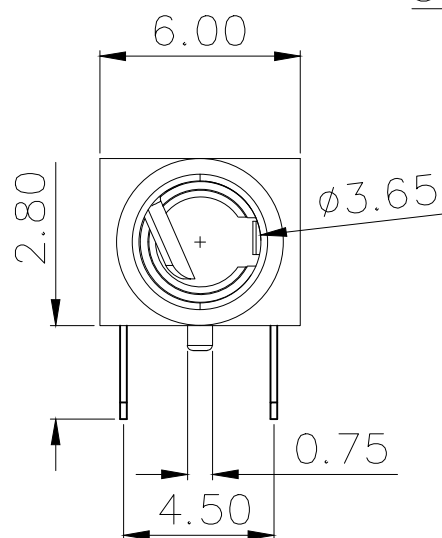

电气性能

NOTES

- MATERIAL:
 - HOUSING: PPA COLOR IS BLACK;
 - CONTACT: PHOSPHOR COPPER (C5191,T=0.2mm);
- FINISH:
 - TERMINAL:
CONTACT AREA: NI PLATED OVER ALL;
SOLDER AREA: SN PLATED OVER ALL;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 0.5 AMP;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 500 VAC RMS
50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 100MEGOHMS MIN
@500V DC;
- MECHANICAL:
 - MATING FORCE: 5~25N;
 - UNMATING FORCE: 5~25N;
 - OPERATING LIFE: 5000 CYCLES;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;
- SALT SPRAY TEST: 8H(EXCLUDING RIVETED BENDS)

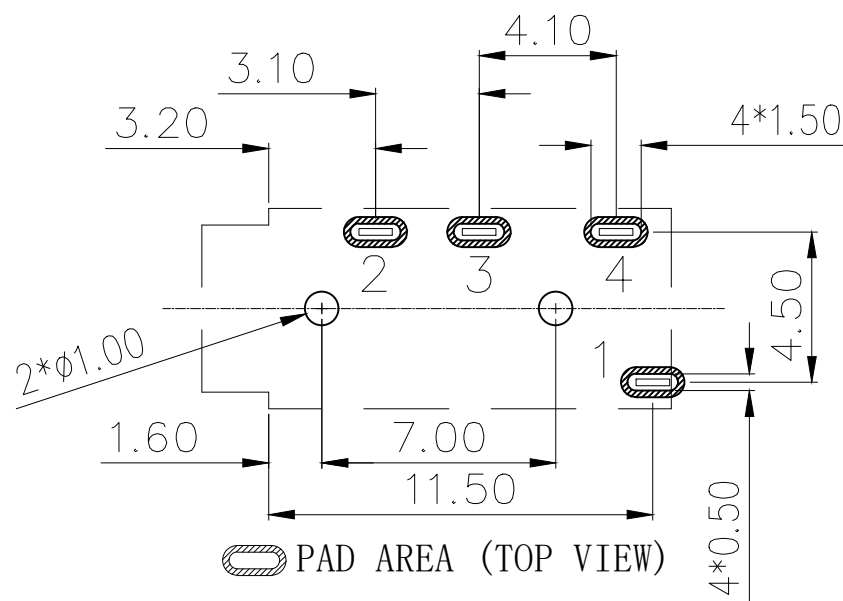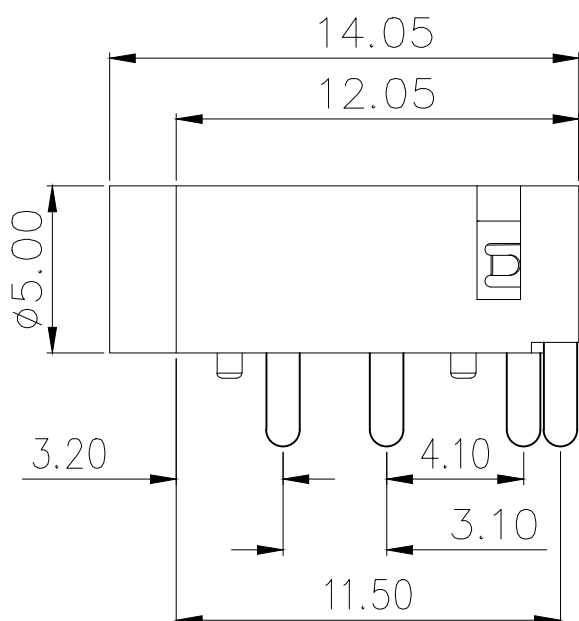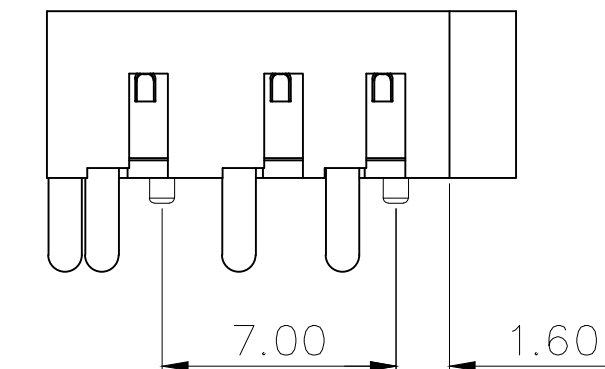

RECOMMEND PCB LAYOUT(±0.05)

2	接触	铜	镀镍	
1	基座	PPA	黑色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	耳机座	
			料 号 PART NO	HC-PJ-320A	
UNLESS OTHERWISE, GENERAL TOLERANCE:		比 列 SCALE	1:1		
X.xxx ±0.10 X.xx ±0.20 X.x ±0.30		单 位 UNIT	MM	制 图 DRAW	AhYe
ANGULAR: X.xx' ±1° X.x' ±3° X.' ±5°		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
		版 本 REV	A	批 准 APPROVE	赵亮亮

