

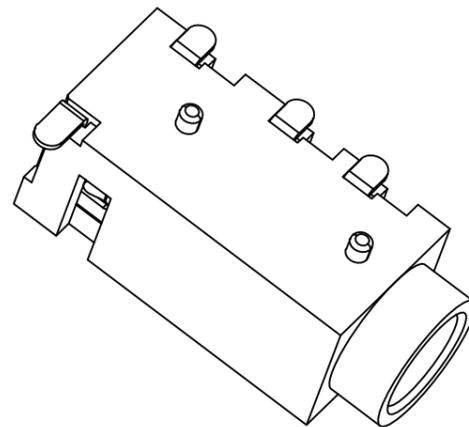
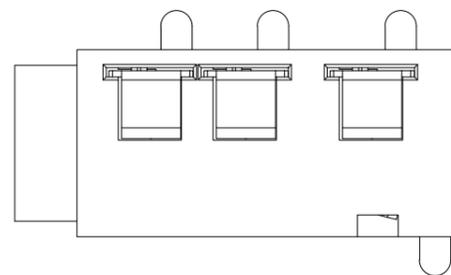

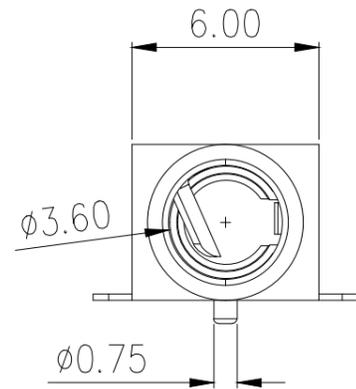


标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

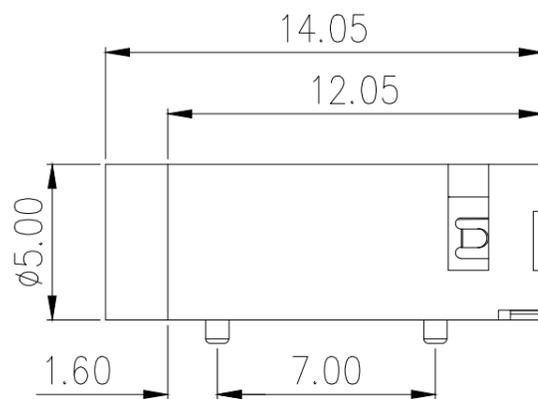



3D VIEW

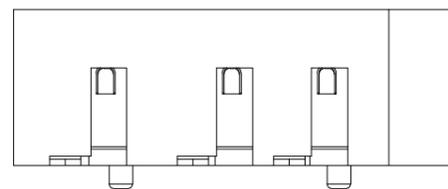

电气性能

NOTES

- MATERIAL:
 - HOUSING: LCP COLOR IS BLACK
 - CONTACT: PHOSPHOR COPPER (C5191,T=0.2mm);
- FINISH:
 - TERMINAL:
 - CONTACT AREA: NI PLATED OVER ALL;
 - SOLDER AREA: SN PLATED OVER ALL;
- ELECTRICAL:
 - VOLTAGE RATING: 30 VAC RMS;
 - CURRENT RATING: 0.5 AMP;
 - CONTACT RESISTANCE: 30MILLIOHMS MAX.;
 - WITHSTAND VOLTAGE: 500 VAC RMS
50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 100MEGOHMS MIN
@500V DC;
- MECHANICAL:
 - MATING FORCE: 5~25N;
 - UNMATING FORCE: 5~25N;
 - OPERATING LIFE: 5000 CYCLES;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;
- SALT SPRAY TEST: 8H(EXCLUDING RIVETED BENDS)

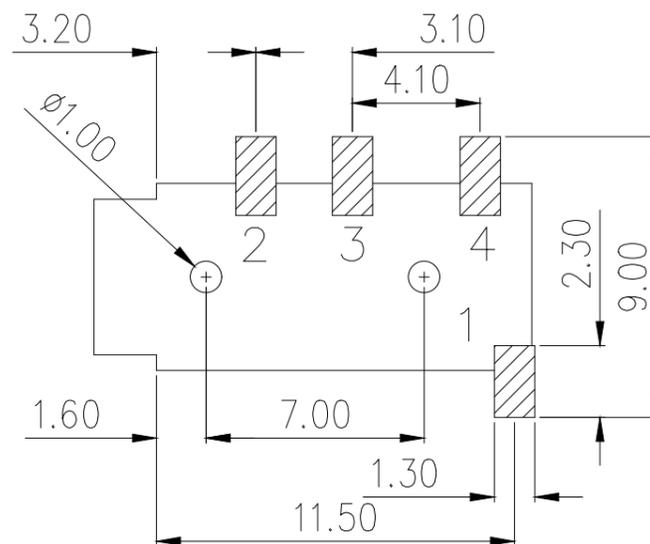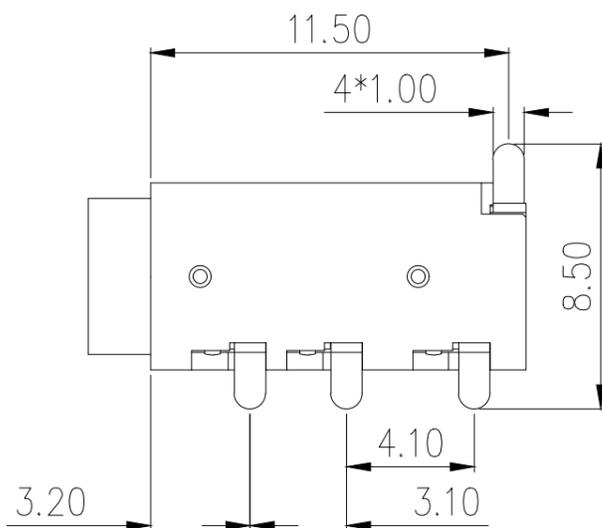

RECOMMEND PCB LAYOUT(±0.05)

2	接触	铜	镀镍	
1	基座	LCP	黑色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	耳机座	
			料号 PART NO	HC-PJ-320D	
UNLESS GENERAL TOLERANCE:		比列 SCALE	1:1		
OTHERWISE, TOLERANCE:		单位 UNIT	MM		
X.xxx ±0.10		张数 PART NO	1 OF 1		
X.xx ±0.20		版本 REV	A		
X.x ±0.30		制图 DRAW	AhYe		
ANGULAR:		审核 CHECKED	夏操云		
X.xx° ±1°		批准 APPROVE	赵亮亮		
X.x° ±3°					
X.° ±5°					