
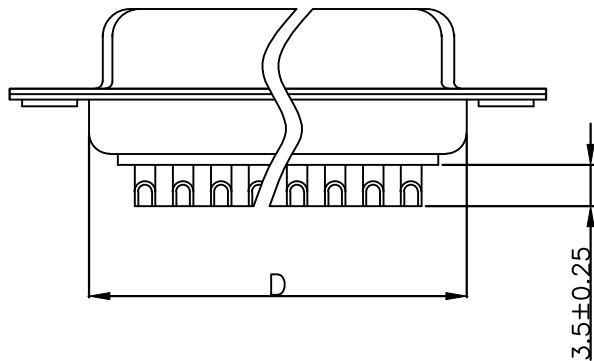



RoHS Component

“\*” Pivot Dimension

| P0(XXX) | A ±0.25 | B ±0.13 | C ±0.38 | D ±0.25 |
|---------|---------|---------|---------|---------|
| 009     | 16.33   | 24.99   | 30.81   | 19.28   |
| 015     | 24.66   | 33.32   | 39.14   | 27.51   |
| 025     | 38.38   | 47.04   | 53.04   | 41.28   |
| 037     | 54.84   | 63.50   | 69.32   | 57.71   |

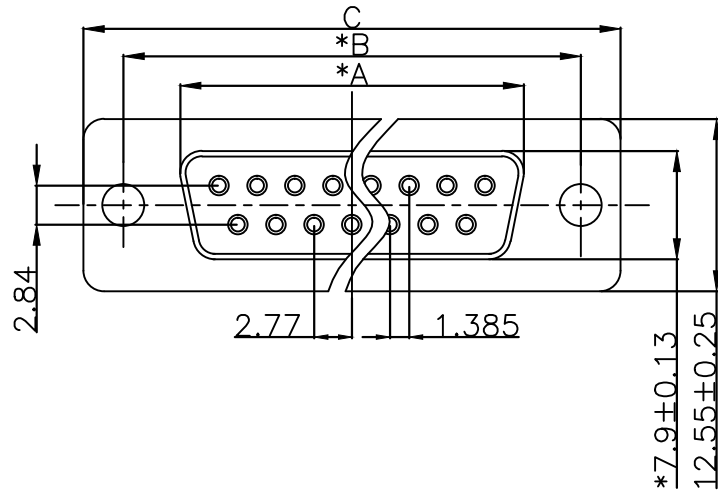

#### NOTICE :

##### 1. ELECTRICE:

DIELECTRIC RATING: 300V

CONTACT CURRENT RATING: 5AMP

CONTACT RESISTANCE: 15mΩ MAX.

INSULATION RESISTANCE: 1000MΩ MIN.at 500V DC

DIELECTRIC STRENGTH: 500V AC RMS for 1Minute

OPERATION TEMPERATURE: -55C° ~125C°

##### 2. MATERIAL:

INSULATOR: PBT+30% G. F (UL94V-0)

CONTACT: COPPER ALLOY

CONTACT PLATED:GOLD FIASH OVER NICKEL

SHELL: SPCC

SHELLPLATED:NICKEL/TIN

浙江创都电子科技有限公司

|                                                                                                                                           |                     |                               |                                      |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------|--------------------------------------|---------------|
| <b>TOLERANCE:</b><br>X.X ±0.38<br>X.XX ±0.25<br>X.XXX ±0.13<br>X° ±5° X.X° ±2°<br><br><b>UNIT: mm [inch]</b><br><b>SCALE:1:1 SIZE: A4</b> | <b>DRAWN BY :</b>   | <b>DATE :</b><br>2009. 08. 22 | <b>PART NAME:</b><br>DB XP 母 焊线式传统铆合 |               |
|                                                                                                                                           | <b>CHECKED BY:</b>  | <b>DATE :</b><br>2009. 08. 22 | <b>DRAW NO.</b>                      | DB-M-*P-HX-GK |
|                                                                                                                                           | <b>APPROVED BY:</b> | <b>DATE :</b><br>2009. 08. 22 | <b>PART NO.</b>                      |               |
|                                                                                                                                           |                     |                               | <b>REMARK</b>                        |               |
|                                                                                                                                           |                     |                               | <b>MOLD NO.</b>                      |               |