

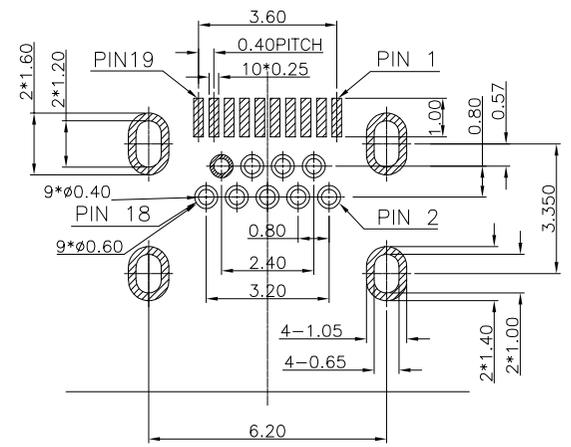
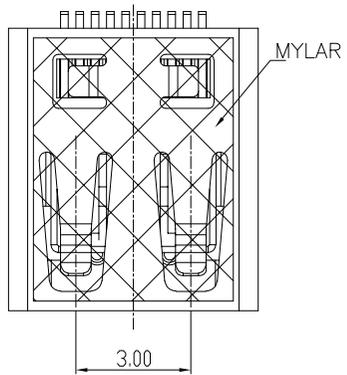
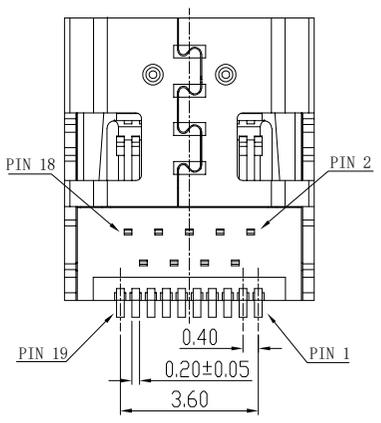


RoHS

文件
分发
业务
资料
生产
注塑
冲压
工程
IQC
IPQC
文控

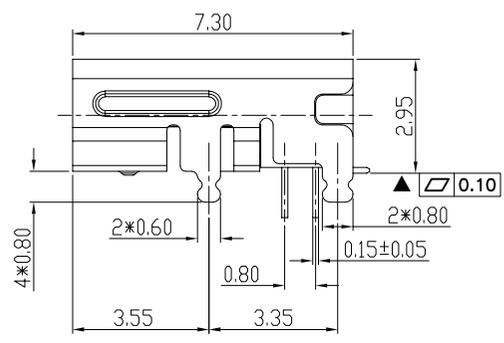

RECOMMENDED PCB LAYOUT THICKNESS = 0.8 mm
TOLERANCE = ±0.05 (TOP VIEW)

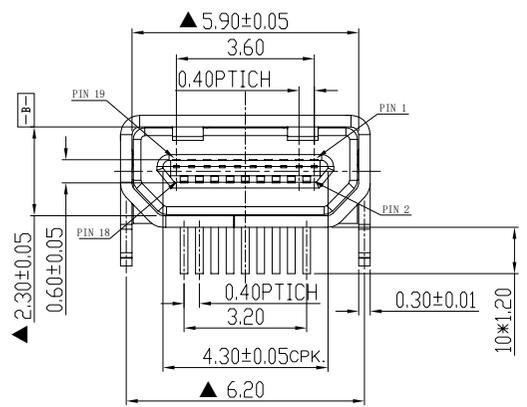

REV.	DESCRIPTION.	ECN NO.	DWG.	CKD.	APPD.	DATE.
A	NEW		Jack	Larry	J.L.Y	2022-12-15

NOTES:

- MATERIAL SPECIFICATION
 - HOUSING: LCP+30% G.F
 - CONTACT: C5191-H T=0.15mm.
 - SHELL: SUS304-1/2H T=0.30mm.
 - MYLAR: KAPTON BASE, POLYIMIDE TAPE.
- PLATING SPECIFICATION
 - CONTACT: NI40u" UNDER PLATED, GOLD FLASH PLATED ON THE FUNCTIONAL AREA OF CONTACT, GOLD PLATING OR TIN ON SOLDER AREA.
 - SHELL: NICKEL PLATED.
- MECHANICAL PERFORMANCE
 - INSERTION FORCE: 44.1N (4.5 KGF) MAX.
 - WITHDRAWAL FORCE: 4.9N~25N(0.5KGF~2.5KGF).
 - DURABILITY: 5000 CYCLES.
- ELECTRICAL PERFORMANCE
 - CURRENT RATING: 0.3A.
 - LLCR: CONTACT: 30 mΩ MAX(INITIAL), SHELL: 50 mΩ MAX(INITIAL).
 - INSULATION RESISTANCE:
 - A: UNMATED: 100 MΩ MIN. AT 500V DC.
 - B: MATED: 10 MΩ MIN. AT 150V DC.
- DIELECTRIC WITHSTAND VOLTAGE:
 - 150V AC/60S(MATED), 250V AC/60S(UNMATED).
- IR REFLOW:
 - THE PEAK TEMPERATURE ON BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260±5°C.
- OPERATING TEMPERATURE RANGE: -20°C~85°C(WITHOUT LOSS FUNCTION).

DF013-R xx 1 x TE24HWR

端子电镀要求: 颜色:



17: 镀全金G/F	B: 黑色
18: 镀全金3U"	N: 本色
19: 镀全金5U"	
20: 镀全金15U"	

TOLERANCES UNLESS OTHERWISE SPECIFIED		深圳市辉焕科技有限公司			
UNIT (MM)		ORIGINAL DATA	TITLE		
X. ±0.55		2022-12-15	HD TYPE D FEMALE DIP SMT TYPE (端子脚长1.20外壳脚长0.80MM外壳脚距3.35MM)		
X.X ±0.35		Jack			
X.XX ±0.25		Larry	PART NO.	SCALE	SIZE
X.XXX ±0.15		J.L.Y	HDMI-DF013-H3.35	1:1	A4
ANGEL ±2'			DWG NO.	SHEET	REV.
			HDMI-DF013-H3.35	1/2	A

文件
分发
业务
审核
生产
注册
冲压
工程
IQC
IPQC
文控

RoHS

REV.	DESCRIPTION.	ECN NO.	DWG.	CKD.	APPD.	DATE.
A	NEW		Jack	Larry	J.L.Y	2022-12-15

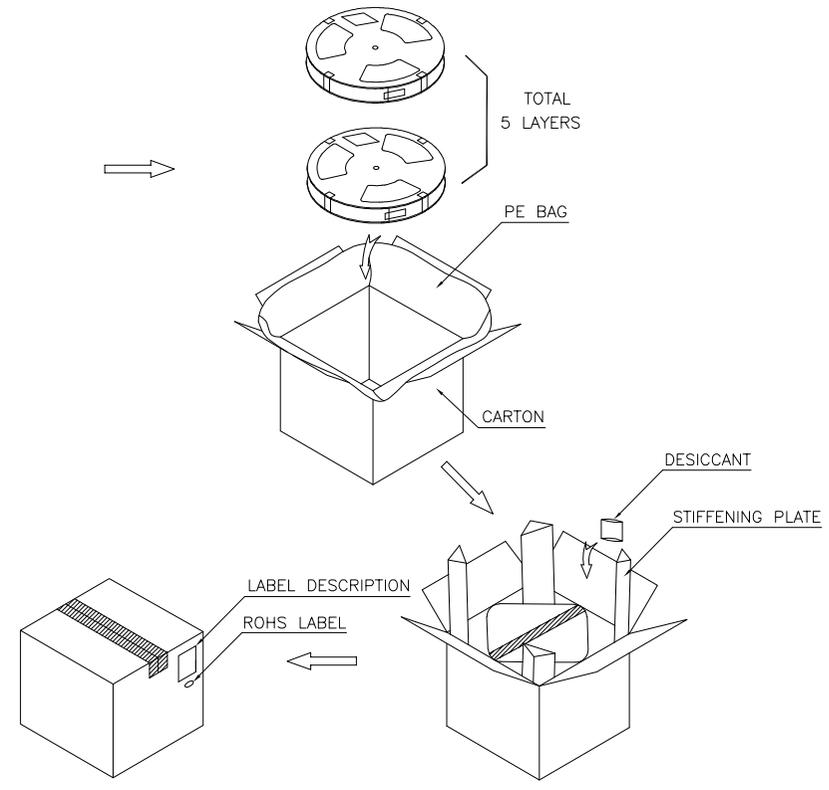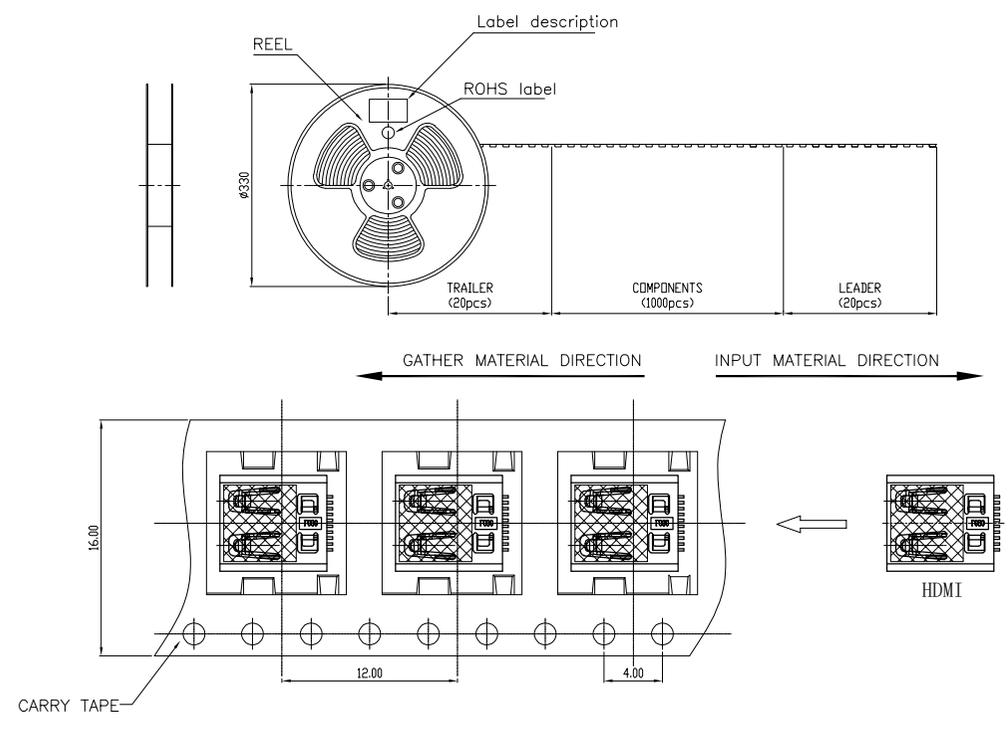

Notes:
1. Carton size: 34*34*12cm.ed
2. QTY: 1000pcs/reel, 5reel/carton, tota5000pcs/carton;

TOLERANCES UNLESS OTHERWISE SPECIFIED		深圳市辉焕科技有限公司			
UNIT (MM)		ORIGINAL DATA	TITLE		
X.	±0.55	2022-12-15	HD TYPE D FEMALE DIP SMT TYPE (端子脚长1.20外壳脚长0.80MM外壳脚距3.35MM)		
X.X	±0.35	Jack			
X.XX	±0.25	Larry	PART NO.	SCALE	SIZE
X.XXX	±0.15	J.L.Y	HDMI-DF013-H3.35	1:1	A4
ANGEL	±2'		DWG NO.	SHEET	REV.
			HDMI-DF013-H3.35	2/2	A