
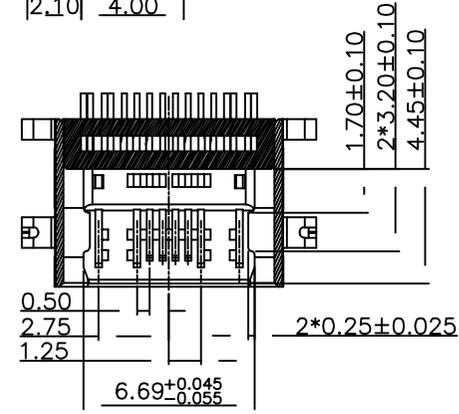


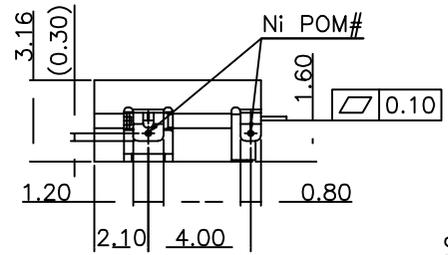
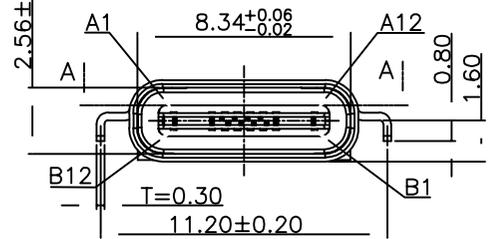



RoHs

VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
A		TANG		NEW RELEASE	05/04' 23

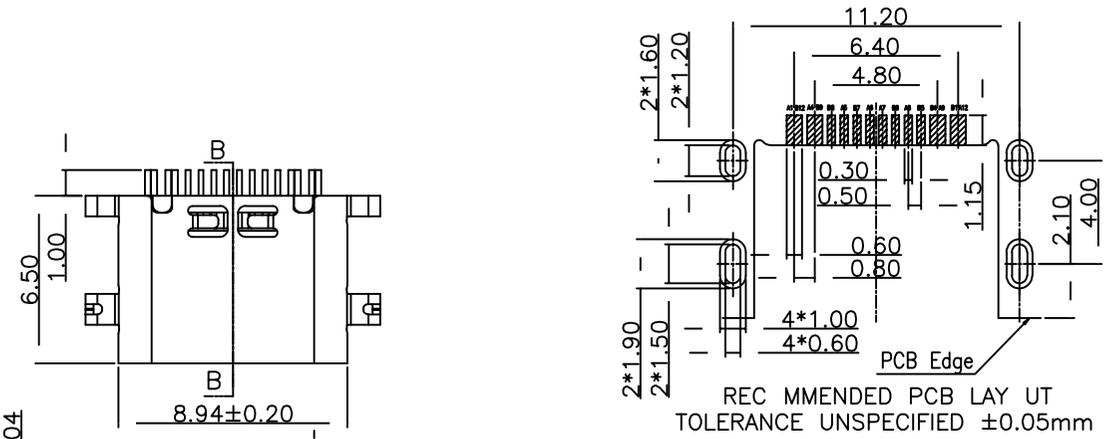

USB TYPE-C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

SPECIFICATION:

- Material:
HOUSING&MOLDING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0
CONTACTS:COPPER ALLOY
SHELL:SUS201
- Mechanical:
2.1.Mating force:5~20N;
2.2.Unmating force:6~20N;
2.3.Durability: 3000 Cycles;
- Electrical:
3.1.Current Rating:3A Max.;;
3.2.Voltage Rating:20V Max.;;
3.3.Dielectric Withstanding voltage:100VAc;
3.4.Contact resistance:40m Ohms Max.;;
3.5.Insulation Resistance:100M Ohms Min.;;
- Environmental:
4.1.Operating temperature:-40°C~+85°C;
4.2.Wetting Temperature:265±5°C,5±0.5s
4.3.Salt Spray Test:24H




3	Molding	LCP	BLACK/WHITE	UL 94V-0
2	TYPE C TERMINAL	C2680-EH, T=0.15mm	—	CONTACT AREA: GOLD PLATING. SOLDER AREA: GOLD PLATING. UNDER PLATE: NICKEL 30u"Min PLATING.
1	SHELL	SUS201, T=0.30mm	—	Ni 30u"Min Plated
NO.	DESCRIPTION	MATERIAL	C LOR	REMARK

CUSTOMER		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Song	TITLE: 沉板1.6 不锈钢外壳 四脚插板	深圳市辉焕科技有限公司
SIZE A4	UNITS MM[INCH]	X±0.50 .X±0.35	X'±5.0' .X'±3.0'	CHECKED BY: TANG	PART N .: HH 16P-CB TYPE-C (Y499)	
SCALE 1:1	REV. A	.XX±0.25 .XXX±0.15	.XX'±2.5' .XXX'±2.0'	DESIGN BY: TANG	DWG N .: HH 16P-CB TYPE-C (Y499)	SHEET 1/2



RoHS

VER	MARK	PR. BY	ECR/ECN	DESCRIPTION	DATE
A		Tang		NEW RELEASE	05/04' 23

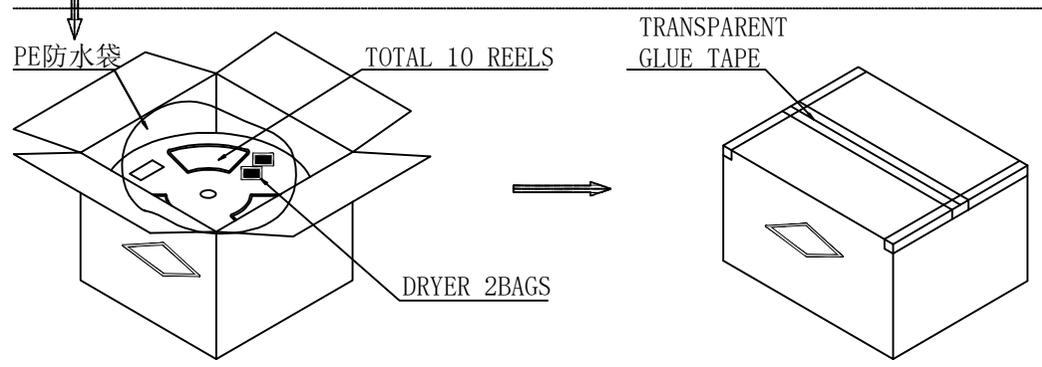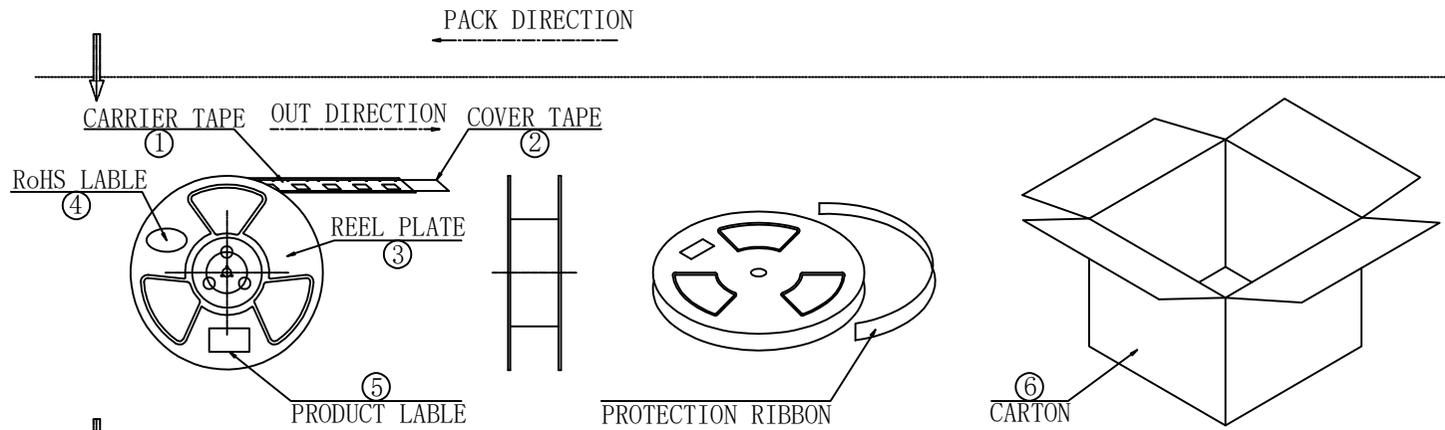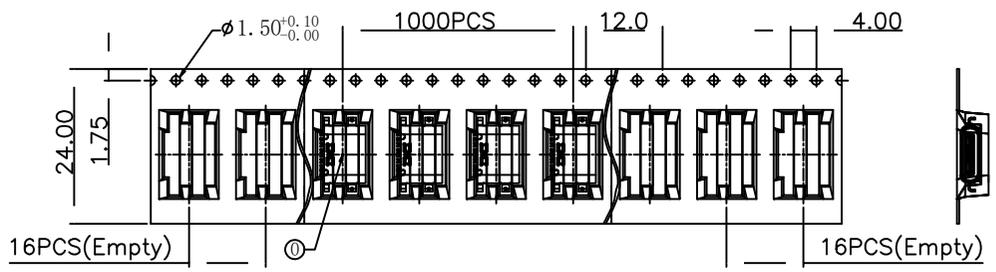

说明:

1. 每卷前后各空16PCS, 尾部用美纹胶纸封住;
2. 将产品放满盘后, 再卷一圈保护带, 用美纹胶纸将其封住, 并贴上1Pcs物料标签;
3. 每10卷盘一叠共10000Pcs并装入1个外箱内;
4. 在搬运过程中要轻拿轻放;
5. 在运输中不可堆放过多(1.8M最高), 不可重压;
6. 跌落测试条件:
成品箱从1.2米高度自由落体(一角三棱六面):
a. 产品不可跑出下带凹槽;
b. 产品不可有摔伤, 变形;
c. 内包装材料不可严重破损.

NO.	NAME	SPEC	Q' TY
①	TYPE C RECEPTACLE		10000PCS/CARTON
②	CARRIER TAPE	W=24mm, T=0.30mm	1000PCS/PLATE
③	COVER TAPE	W=21.3mm	10PLATES/CARTON
④	REEL PLATE	∅330*100*24.4mm	10PCS/CARTON
⑤	RoHS LABEL		10PCS/CARTON
⑥	PRODUCT LABER		10PCS/CARTON
⑦	CARTON	350*340*310mm	1PCS/PACKAGE

PACKAGING		GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Song	TITLE: 沉板1.6 不锈钢外壳 四脚插板	深圳市辉焕科技有限公司
SIZE A4	UNITS MM[INCH]	X±1.0 .X±0.50	X'±5.0' .X'±3.5'	CHECKED BY: Tang	PART N .: HH 16P-CB TYPE-C (Y499)	
SCALE 1:1	REV. A	.XX±0.30 .XXX±0.15	.XX'±2.5' .XXX'±1.5'	DESIGN BY: Tang	DWG N .: HH 16P-CB TYPE-C (Y499)	SHEET 2/2

