
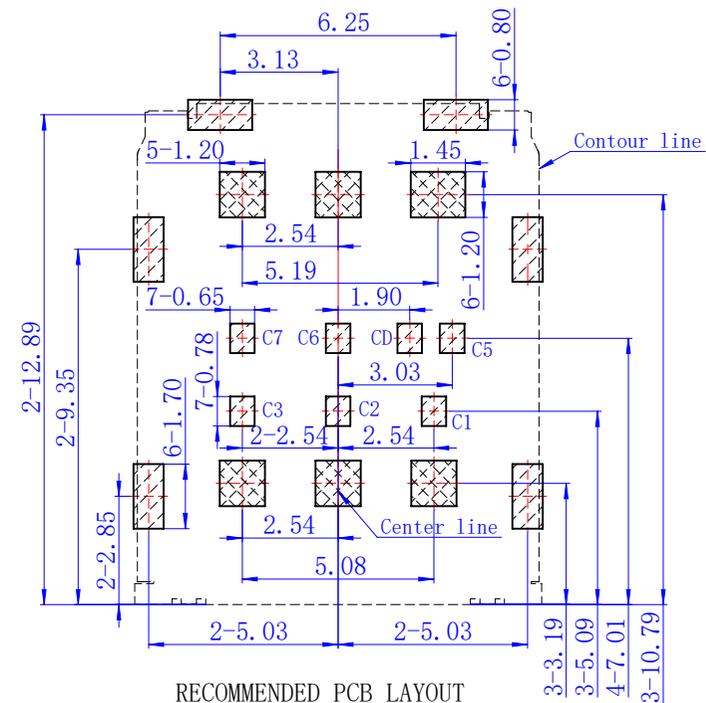
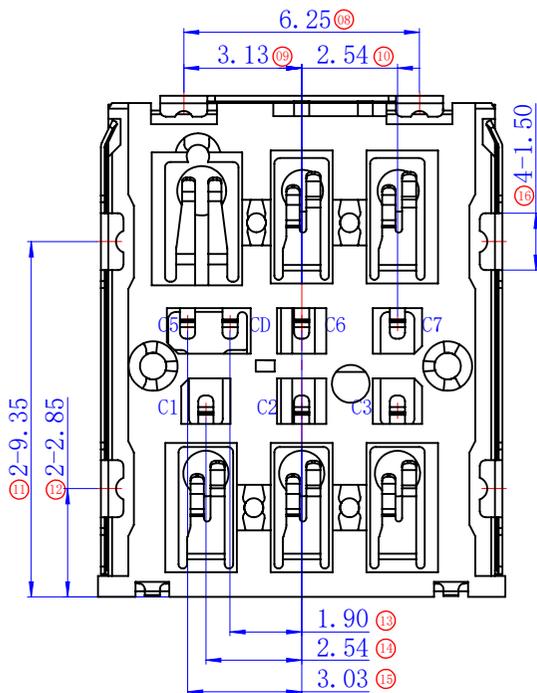


ROHS

REV.	ECN. #	DESCRIPTION	NAME	DATE
A0	_____	NEW RELEASE	GuoXuetong	03/02/21

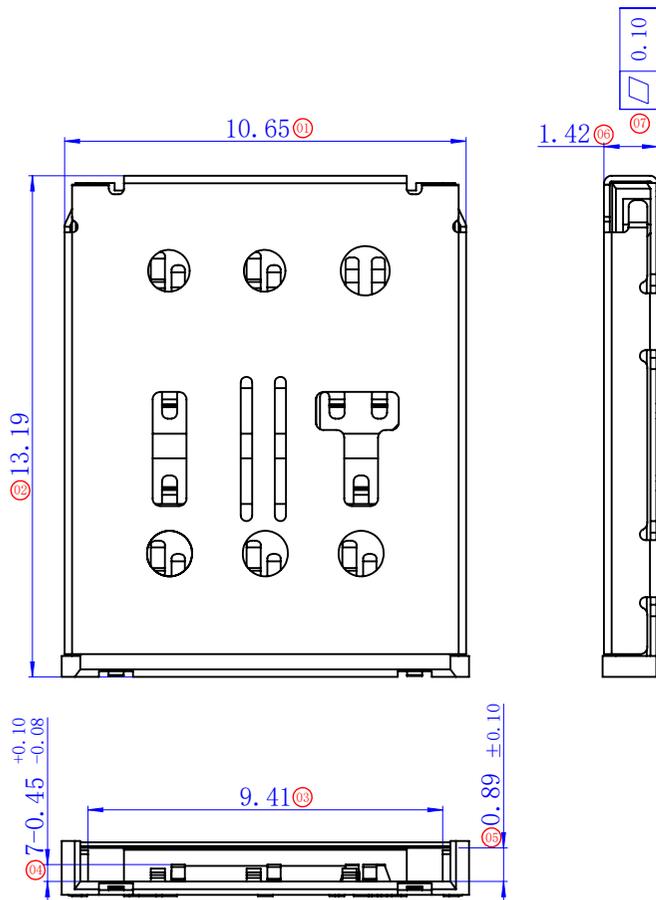

RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05

SMT SOLDER AREA

COPPER RESTRICTED AREA

- 1. TOUCH AREA OF CONTACT TIPS NO ELECTRICAL FUNCTION
- 2. NO FIRST PCB_LAYOUT CIRCUITS IN THE AREA

Notes:

- Material:
 - Housing: High Temperature Thermoplastic
 - Terminal: Copper Alloy
 - Shell: Stainless Steel
- Plating:
 - Terminal: 50u" Ni Underplated Overall
 - G/F Plated On Contact Area
 - G/F Plated On Solder Area
 - Shell: 50u" Ni Underplated Overall
 - G/F Plated On Contact Area And Solder Area
- Technical Speciality:
 - Rated Voltage: 30V
 - Current Rating: 0.5A
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 100mΩ Max.
 - Withstanding Voltage: 500V DC For 1 Minutes.
 - Operating Temperature: -40℃~+75℃ Humidity 80% R.H Max.

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	Detect Switch

MILLIMETERS	INCH
X.° ±2°	X.° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd




东莞市金比莱五金塑胶科技有限公司

DongGuan JinBiLai Metal Plastic Technology Co., Ltd

TITLE	1.42H No-Push Nano-SIM卡座	DR		
PART NUM.	102014552	CHKD		
PRO J.	PAGE 1/2	UNITS mm	APPD	
SIZE	A4	SCALE 5:1	DIS NO.	NS006-000<客户图>


ROHS

Direction of use →

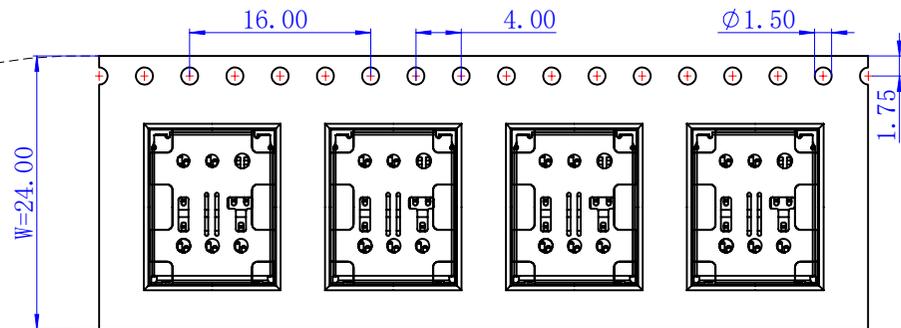

NOTES:


- 1、Packing quantity per plate: 1500PCS/Plate
- 2、Loading and packing method

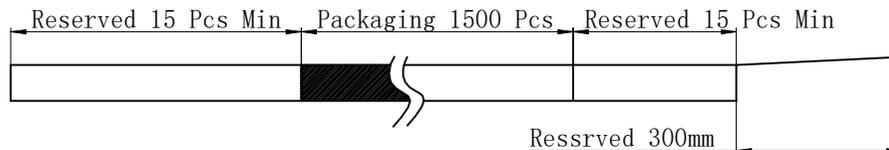


- 3、Total packaging: 15000PCS/Box

Carrier Tape

Direction of use →

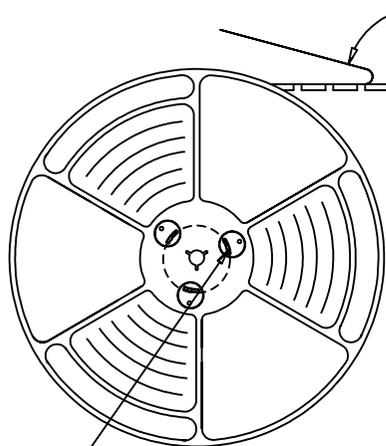

DETAIL B

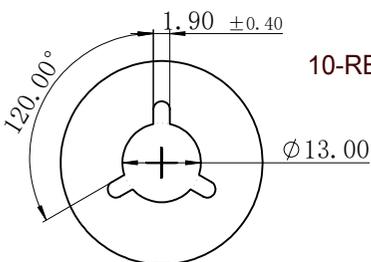


DETAIL B

The bottom and top of the carton Pad it with a piece of pearl cotton

BOX

350*350*340mm

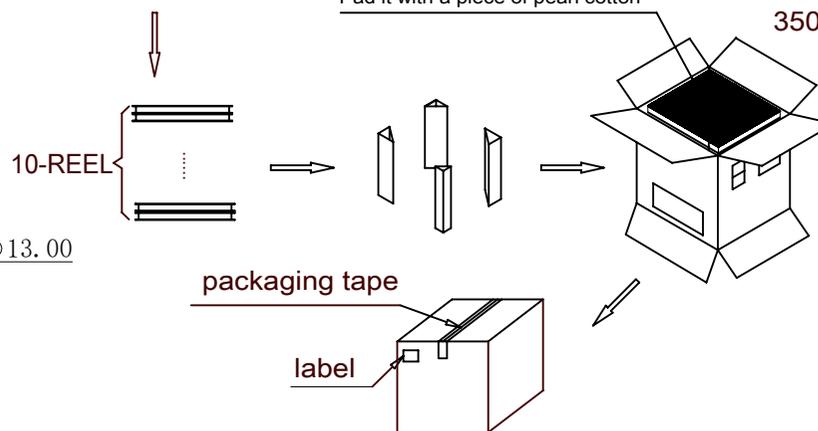

Part Number	Description	Quantity
303020153	Carrier band (Lucent , PET W=24 PH=16,T=0.3)	244.8m
303040009	Box (K=K,T=7.0,350*350*340)	1PCS
303060001	PE Bag (T=0.08mm , 730*760*730)	1PCS
303070024	Self-adhesive (W=21.30)	247.8m
303110001	Beam (K=K , T=7.0,95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180017	REEL (BLUE , 13Inches*24mm , φ330)	10PCS
102014552	1.42H No-Push Nano-Sim Card<NS006-000>	15000PCS

MILLIMETERS	INCH	东莞市金比莱五金塑胶科技有限公司 DongGuan JinBiLai Metal Plastic Technology Co.,Ltd																							
X. ° ±2°	X. ° ±2°	<table border="1"> <tr> <td>TITLE</td> <td>1.42H No-Push Nano-SIM卡座</td> <td>DR</td> <td></td> <td></td> </tr> <tr> <td>PART NUM.</td> <td>102014552</td> <td>CHKD</td> <td></td> <td></td> </tr> <tr> <td>PRO J.</td> <td>PAGE 2/2</td> <td>UNITS mm</td> <td>APPD</td> <td></td> </tr> <tr> <td>SIZE</td> <td>A4</td> <td>SCALE 1:1</td> <td>DIS NO.</td> <td>NS006-000<客户图></td> </tr> </table>				TITLE	1.42H No-Push Nano-SIM卡座	DR			PART NUM.	102014552	CHKD			PRO J.	PAGE 2/2	UNITS mm	APPD		SIZE	A4	SCALE 1:1	DIS NO.	NS006-000<客户图>
TITLE	1.42H No-Push Nano-SIM卡座					DR																			
PART NUM.	102014552					CHKD																			
PRO J.	PAGE 2/2					UNITS mm	APPD																		
SIZE	A4	SCALE 1:1	DIS NO.	NS006-000<客户图>																					
.X ±0.30	.X ±0.012																								
.XX ±0.20	.XX ±0.008																								
.XXX ±0.10	.XXX ±0.004																								
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DongGuan JinBiLai Metal Plastic Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DongGuan JinBiLaiMetal Plastic Technology Co.,Ltd</small>																									