

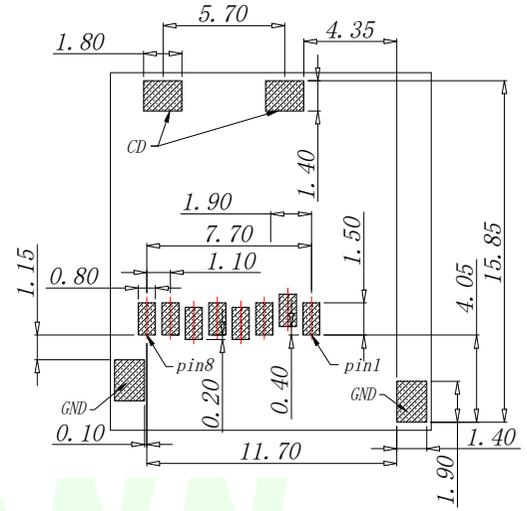
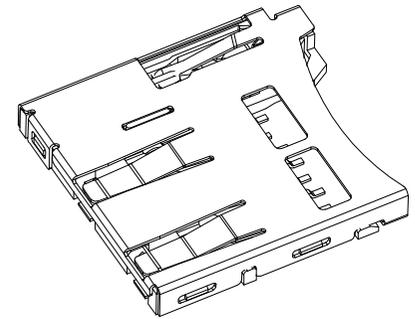
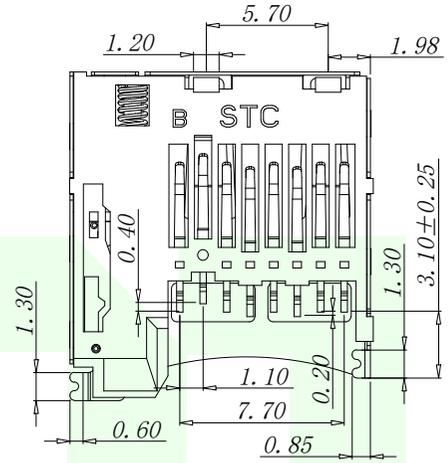




RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

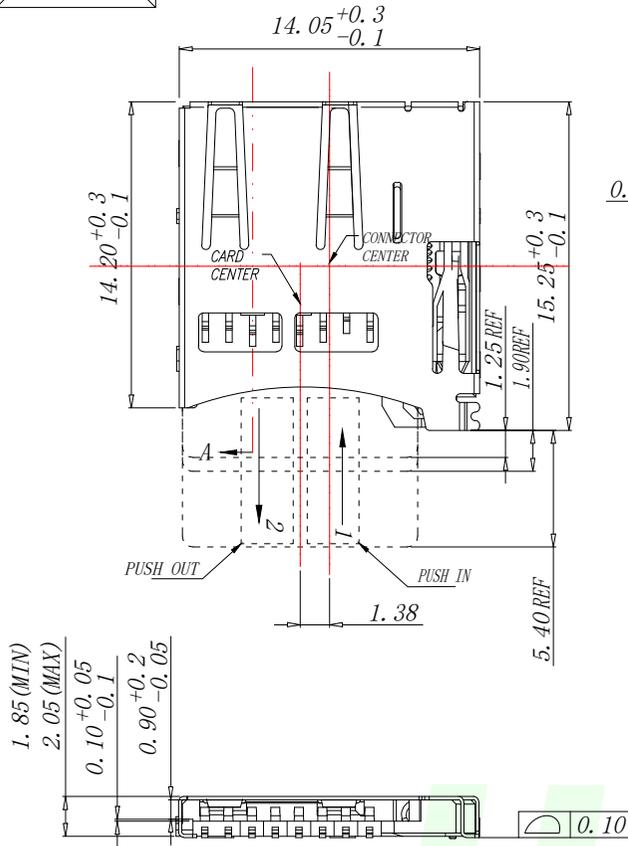

NOTES:

- MATERIAL:**  
HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V\_0, COLOR:BLACK.  
CONTACT: COPPER ALLOYS.  
COVER: COPPER ALLOYS OR STEEL.
- PLATING:**  
UNDERPLATE: NICKEL.  
CONTACT AREA: GOLD OVER NICKEL.  
SOLDER AREA: TIN OVER NICKEL.
- MULTIMEDIA CARD COMPATIBLE**



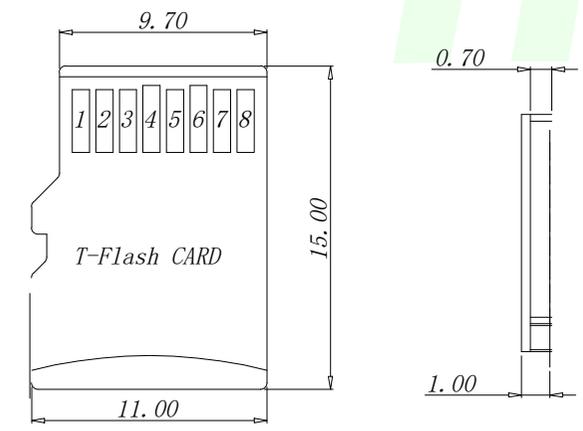


TF CARD PIN DEFINE			
PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(BIT1)


GENERAL TOLERANCES UNLESS SPECIFIED		<b>深圳市华明通电子有限公司</b> Shenzhen Huamingtong Electronics Co., Ltd	
.X ±0.35	.X° ±3°	PART NO. HMT-TF-001B	TITLE: T-FLASH CARD PUSH PUSH B TYPE 内焊
.XX ±0.25	.XX° ±2°	DESIGN: James	CUSTOMER
.XXX ±0.15		CHED: Talen	SIZE A4
MANUFACTURE DWG		APPD: Sophia	UNITS MM
			SCALE N:A
			SHEET 1/1

RoHS

VER	MARK	PR. BY	DESCRIPTION	DATE

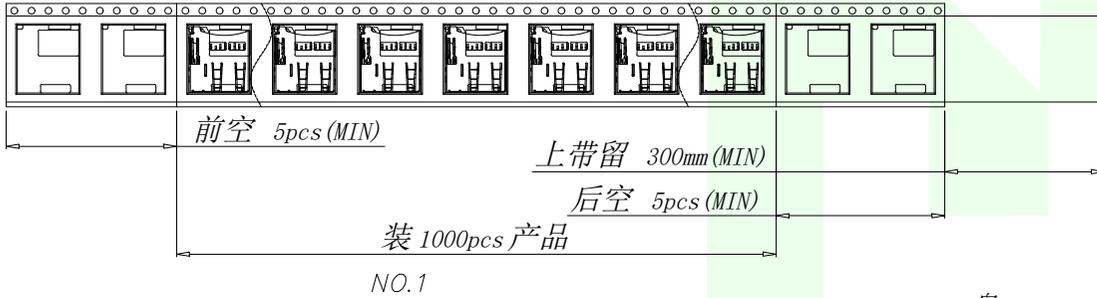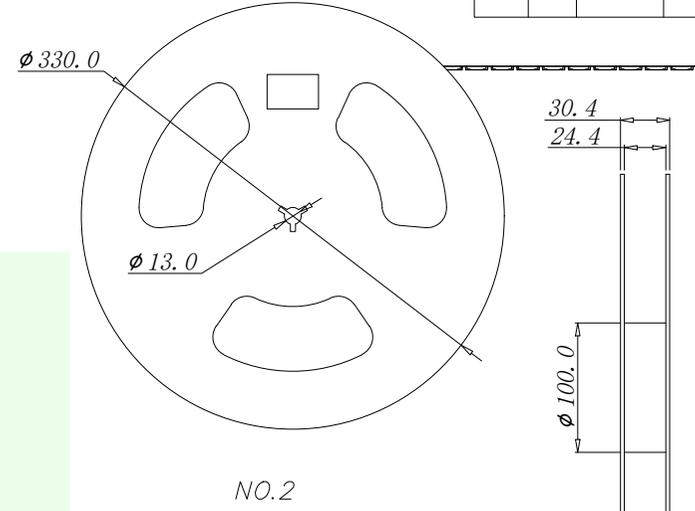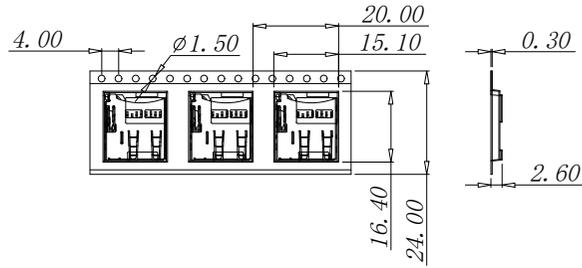


12 盘

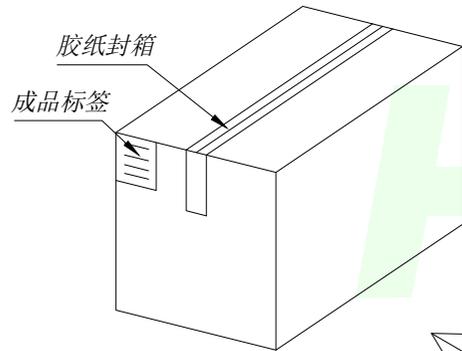


纸箱规格 : 330\*330\*385

NO.4

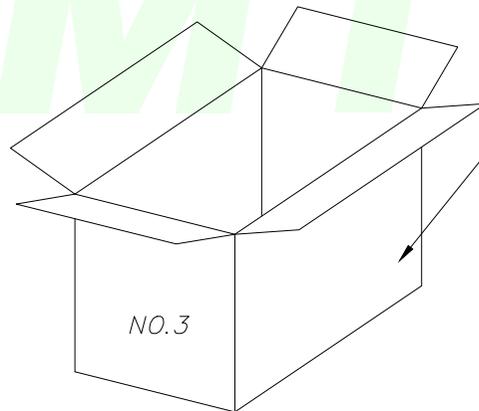

NO.3

GENERAL TOLERANCES UNLESS SPECIFIED		 <b>深圳市华明通电子有限公司</b> Shenzhen Huamingtong Electronics Co., Ltd		
.X ±0.35	.X° ±3°	PART NO.	TITLE:	
.XX ±0.25	.XX° ±2°	HMT-TF-001B	T-FLASH CARD PUSH PUSH B TYPE 内焊	
.XXX ±0.15		DESIGN: James	CUSTOMER	SIZE
MANUFACTURE DWG		CHED: Talen		A4
APPD: Sophia				MM
				SCALE
			N:A	1/1

1. 材质要求:

- 1.1 纸箱的材质为K=K; 外形尺寸为33\*33\*38.5CM;
- 1.2 卷盘的材质为PS, 卷盘的外形尺寸为 $\phi 330*30.4$ ;
- 1.3 卷带的材质为PS, 卷带的外形尺寸为20200\*24.00\*2.6mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1000PCS, 再后空5PCS; 上带留300MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12盘叠放入纸箱中共计12Kset;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签