
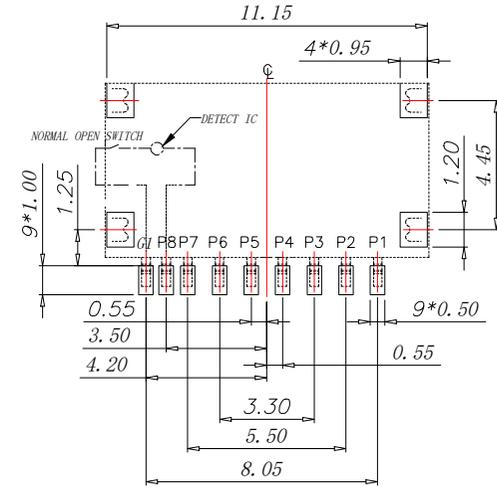




RoHS


VER	MARK	PR. BY	DESCRIPTION	DATE

Specification:

1. ELECTRICAL CHARACTERISTICS
 - 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
 - 2-1. DURABILITY: 5,000 CYCLES
3. RoHS 2002/95/EC COMPLIANT.

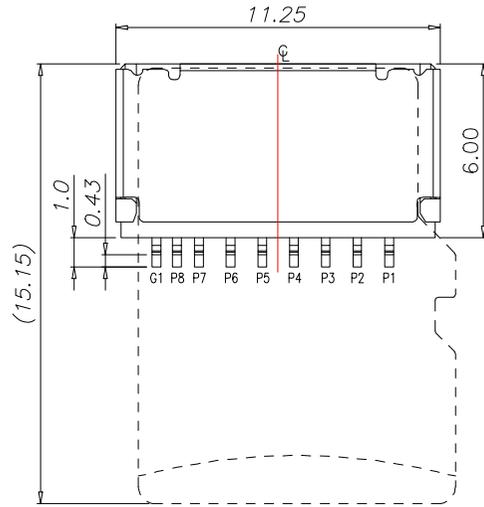


RECOMMEND PCB LAYOUT
(TOLERANCE: ±0.05)

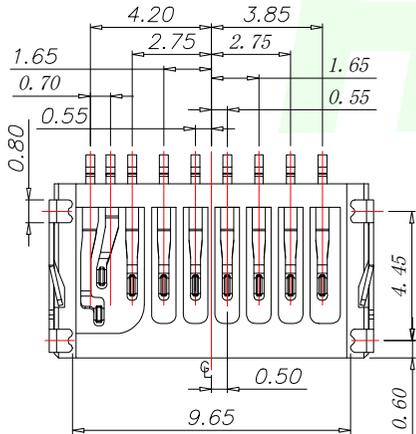

Pin No.	DIM A
HMT-TF-018-H17	1.70
HMT-TF-018	1.50






Pin No.	Pin assignment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
G1	SWITCH
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

C	SHELL	1	STAINLESS STEEL 0.15t	Ni PLATING
B	CONTACT	9	COPPER ALLOY 0.15t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated.
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR


GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd		
.X ±0.35	.X° ±3°	PART NO. HMT-TF-018	TITLE: T-FLASH CONN 9P SIMPLE SOCKET (With Detect)	
.XX ±0.25	.XX° ±2°		DESIGN: James	CUSTOMER
.XXX ±0.15		CHED: Talen	SIZE A4	UNITS MM
MANUFACTURE DWG		APPD: Sophia	 SCALE N:A	SHEET 1/1

RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

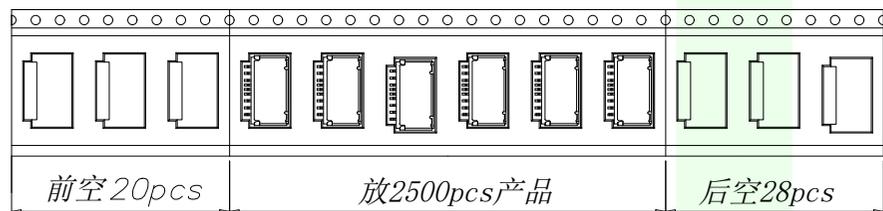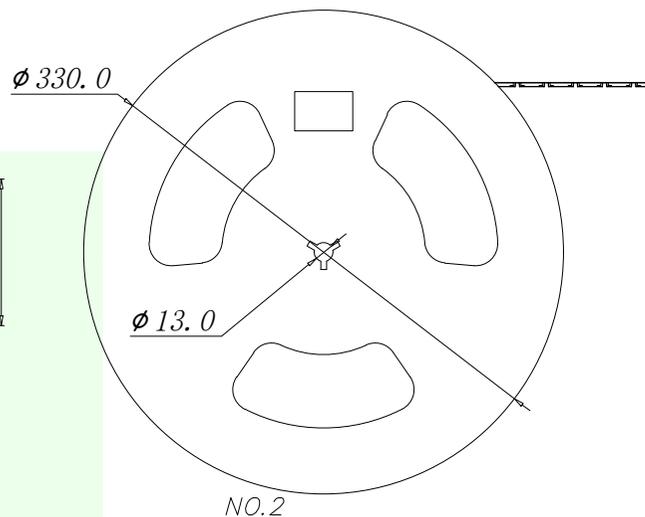
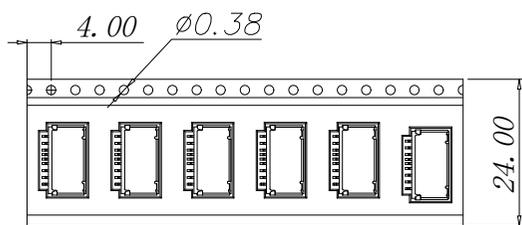


NO.1

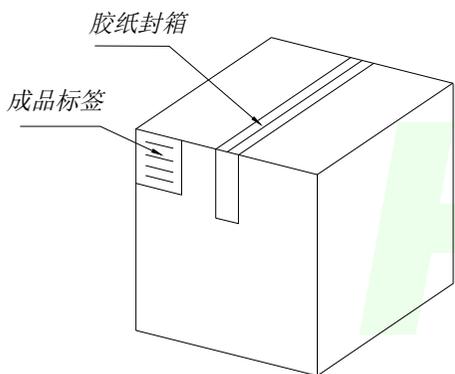

纸箱规格 : 340*340*300

NO.4

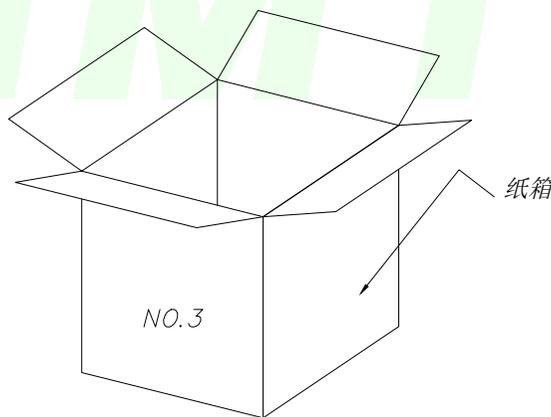


1. 材质要求:

- 1.1 纸箱的材质为A=B; 外形尺寸为 34*34*30;
- 1.2 卷盘的材质为PVC, 卷盘的外形尺寸为 $\phi 330*30.4$;
- 1.3 卷带的材质为PVC, 卷带的外形尺寸为 $24400*24.00*2.4mm$;

2. 包装方式:

- 2.1 将卷带放入包装机后, 前空20PCS, 后放产品2500PCS, 再后空 28PCS。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的 11 盘叠放入纸箱中共计 27.5Kset;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 HMTCONN Shenzhen Huamingtong Electronics Co., Ltd		
.X ±0.35	.X° ±3°	PART NO. HMT-TF-018	TITLE: T-FLASH CONN 9P SIMPLE SOCKET (With Detect)	
.XX ±0.25	.XX° ±2°	DESIGN: James	CUSTOMER	SIZE A4
.XXX ±0.15		CHED: Talen		UNITS MM
MANUFACTURE DWG		APPD: Sophia		SCALE N:A
				SHEET 1/1